Pendant control stations

Double insulated, type XACA

For control circuits

Variable composition stations, factory assembled

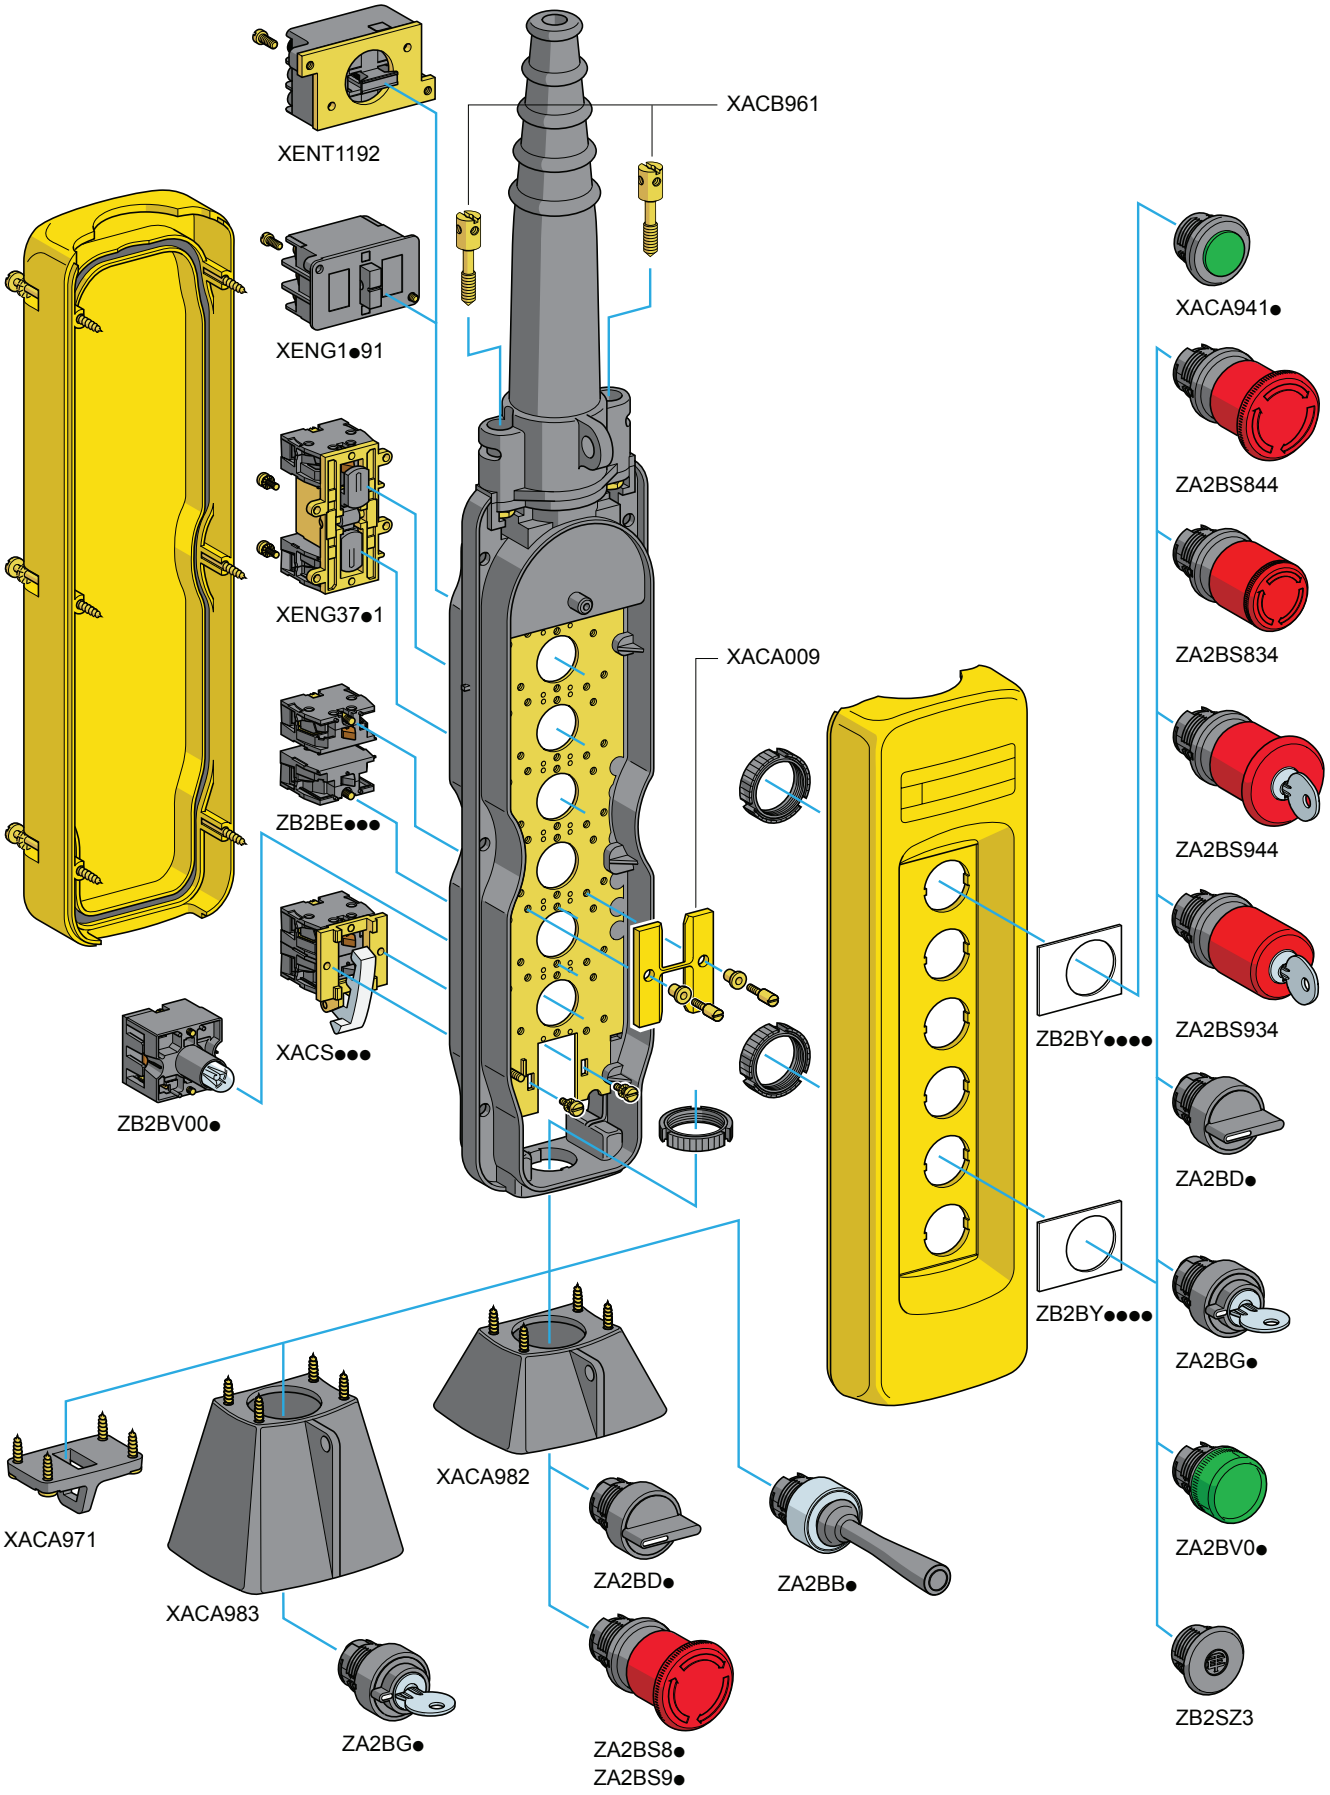

Pendant control stations

Double insulated, type XACA
For control circuits
Variable composition stations, factory assembled

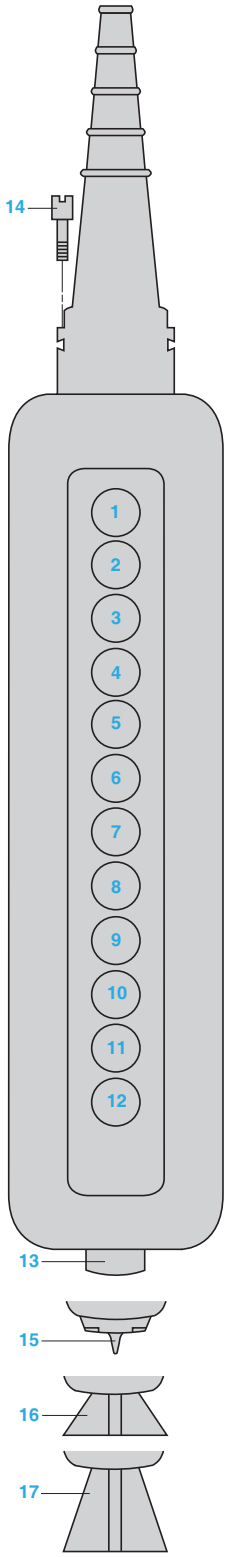

Customer			Schneider Electric Industries	
Company	Order N°	Delivery date	Sales office - Subsidiary Co.	Order N°

Enter the order with XACA09 reference

Unit reference of empty enclosure, see page 3/5	**Number of identical stations**	**Enclosure price** *(1)*
XAC **A** ☐ ☐		

	Legends see page 3/10		**Contact blocks or pilot light bodies** see page 3/6		**Operating heads or pilot light heads or blanking plug** see page 3/8		
	Reference	Unit price	Reference	Unit price	Reference	Unit price	**Total price**
1							
2							
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							

Unit mounted in base of enclosure (if required) (Except when using **XACA03 and XACA05)**

13							

Complementary accessories, see page 3/9 (cross the appropriate box or boxes)

	Description	☒	Reference	Unit price	
14	Adaptor for self-supporting cable type BBAP for use with cable entry sleeve Ø 8 to 26 mm		**XACB961**		
15	Lower support ring		**XACA971**		
16	Protective guard for selector switch (std. handle) or Emergency stop head pushbutton, mounted in base		**XACA982**		
17	Protective guard for key switch or key release Emergency stop head pushbutton, mounted in base		**XACA983**		

Mechanical interlocking *(2)*

Reference	Quantity	Unit price	
XACA009			

Factory assembly:	Number of heads or blanking plugs to be fitted		Additional cost **XAC9VA** for fitting of 1 head or 1 blanking plug	
		X		

Total price of assembled pendant station

(1) Obtain the empty enclosure price.
(2) Connect with a line the 2 ways which require mechanical interlocking.

Examples: combinations possible



Combinations not possible

