TOPJOB®S
Disconnect and Ground Conductor Disconnect Terminal Blocks
6 (10) mm² / 30 A and Through Terminal Blocks of Same Profile, 2006 Series

0.5 - 6 (10) mm² ❶ | AWG 20 - 8 **800 V/8 kV/3 ❷** **I_N 30 A** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❸**	**0.5 - 6 (10) mm² ❶ | AWG 20 - 8** **800 V/8 kV/3 ❷** **I_N 30 A** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❸**	**0.5 - 6 (10) mm² ❶ | AWG 20 - 8** **Terminal block width 15 mm / 0.591 in** **13 - 15 mm / 0.55 in ❸**

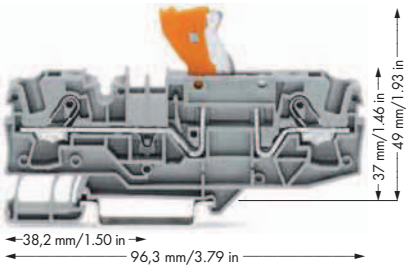

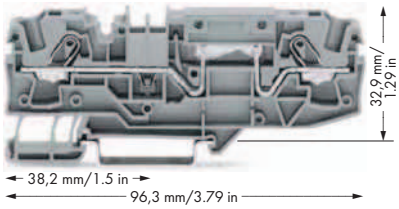

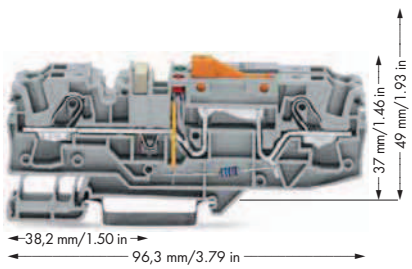

	Item No.	Pack. Unit
2-conductor disconnect terminal block,		
with test point,		
orange disconnect link		
gray	**2006-1671**	25
blue	**2006-1674**	25
Other terminal blocks with the same profile:		
Through	**2006-1601** Page 108	

	Item No.	Pack. Unit
2-conductor through terminal block,		
with test point,		
same profile as 2-conductor disconnect terminal block		
gray	**2006-1601**	25
blue	**2006-1604**	25
Other terminal blocks with the same profile:		
Carrier	**2006-1661** Page 116	
Fuse	**2006-1681** Page 111	

	Item No.	Pack. Unit
Ground conductor disconnect terminal block,		
with test point,		
orange disconnect link, gray		
24 V	**2006-1671/1000-848**	12
48 V	**2006-1671/1000-849**	12
120 V	**2006-1671/1000-850**	12
230 V	**2006-1671/1000-851**	12
Other terminal blocks with the same profile:		
Through	**2006-1601**	Page 108

Item-Specific Accessories

Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	2-way	**2006-402**	50 (2x25)
	3-way	**2006-403**	50 (2x25)
	4-way	**2006-404**	50 (2x25)
	5-way	**2006-405**	50 (2x25)
Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	from 1 to 3	**2006-433**	50 (2x25)
	from 1 to 4	**2006-434**	50 (2x25)
	from 1 to 5	**2006-435**	50 (2x25)
Star point jumper, insulated,			
	I_N = I_N terminal block, light gray		
	1-3-5	**2006-405/011-000**	50 (2x25)

Item-Specific Accessories

Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	2-way	**2006-402**	50 (2x25)
	3-way	**2006-403**	50 (2x25)
	4-way	**2006-404**	50 (2x25)
	5-way	**2006-405**	50 (2x25)
Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	from 1 to 3	**2006-433**	50 (2x25)
	from 1 to 4	**2006-434**	50 (2x25)
	from 1 to 5	**2006-435**	50 (2x25)
Star point jumper, insulated,			
	I_N = I_N terminal block, light gray		
	1-3-5	**2006-405/011-000**	50 (2x25)

Item-Specific Accessories

Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	2-way	**2006-402**	50 (2x25)

2006 Series Accessories

Appropriate marking systems: WMB/Marking strips
(see Section 13)

End and intermediate plate, 1 mm thick			
	orange	**2006-1692**	100 (4x25)
	gray	**2006-1691**	100 (4x25)
Protective warning marker,			
	with high-voltage symbol, black,		
	for 5 terminal blocks		
	yellow	**2006-115**	100 (4x25)

Double-deck marker carrier,			
	pivoting		
	gray	**2002-121**	50 (2x25)
WMB Multi marking system,			
	10 strips with 10 markers per card,		
	stretchable 5 - 5.2 mm		
	plain	**793-5501**	5
Marking strip, plain,			
	11 mm wide,		
	50 m roll		
	white	**2009-110**	1

Screwless end stop,			
	for DIN 35 rail,		
	6 mm wide		
	gray	**249-116**	100 (4x25)
Screwless end stop,			
	for DIN 35 rail,		
	10 mm wide		
	gray	**249-117**	50 (2x25)

For list of approvals and user guide, see pages 634 to 637.

Disconnect and Ground Conductor Disconnect Terminal Blocks



Ground conductor disconnect terminal block – top view

1. Conductor sizes: 0.5 mm² – 10 mm² "s + f-st"; Push-in conductor sizes: 1 mm² – 10 mm² "s" and 1.5 mm² – 6 mm² "insulated ferrule, 12 mm"
2. 800 V = rated voltage
   8 kV = rated surge voltage
   3 = pollution degree
   (also see Section 14)
3. Strip length, see packaging or instructions.

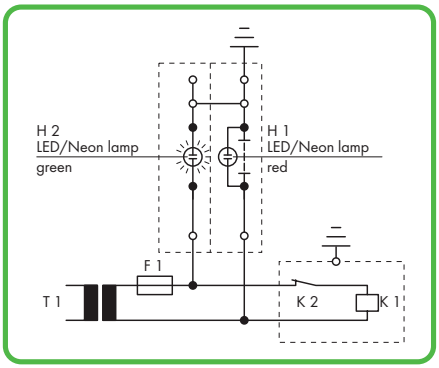

Operating condition
Slide link closed, auxiliary circuit grounded, green lamp illuminates.

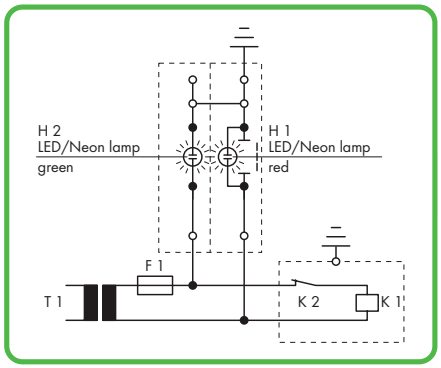

Test condition – no grounding
Slide link open, auxiliary circuit not grounded.

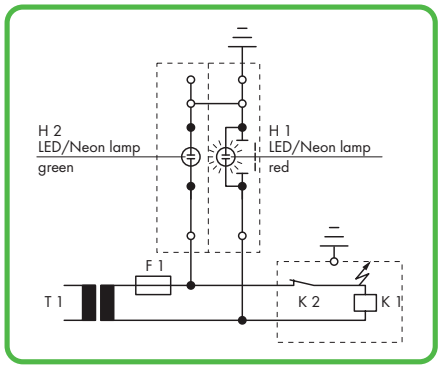

Test condition – grounding
Slide link open, auxiliary circuit not grounded, red lamp illuminates.

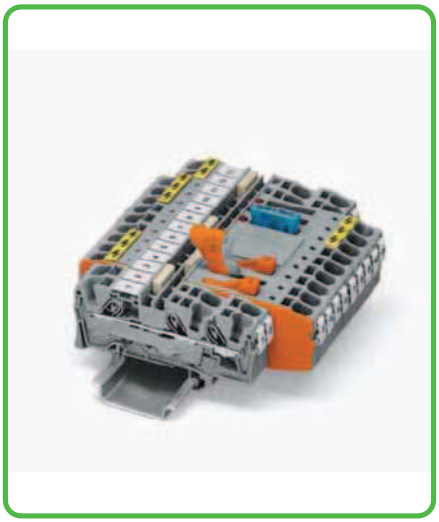

Terminal block assembly including:
Through terminal blocks
N-conductor disconnect terminal blocks
Fuse terminal blocks for mini-automotive fuses

IEC 60204/DIN VDE 0113 "Electrical equipment of industrial machines, part 1: General requirements" 9.4.3.1:

Ground faults on control circuits shall not cause unintentional starting, hazardous movements or prevent stopping the machine.

In order to fulfill this requirement, bonding to the protective bonding circuit shall be provided in accordance with 8.2 and the devices shall be connected as described in 9.1.4. Control circuits fed from a transformer and not connected to the protective bonding circuit shall be provided with an insulation monitoring device (e.g., residual current device), which either indicates an ground fault or interrupts the circuit automatically after an ground fault.

In the case of electronic circuits, the connection of one side of the control circuit to the protective bonding circuit in accordance with 9.1.4 can prevent unintentional operation. When this does not help, or if due to other reasons electronic circuits cannot be connected to the protective bonding circuit, other measures shall be taken to achieve the same level of safety.

Multipole control switches which interrupt all live conductors shall be used where the control circuit is directly connected between the phase conductors of the supply or between a phase conductor and a neutral conductor, which is either not grounded or grounded through a high impedance.
This is required for starting or stopping those machine functions, which can cause a hazardous situation including: damaging the machine or halting the work in progress, in the event of unintentional starting or failure to stop.

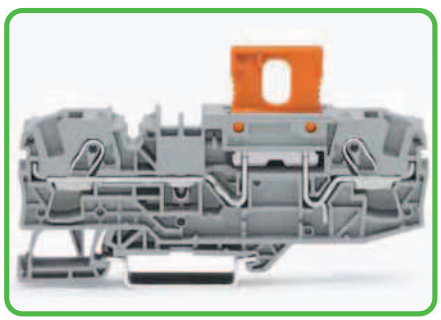

Carrier terminal block with disconnect plug in operating position.

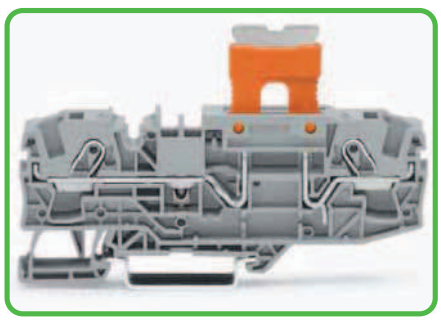

Carrier terminal block with disconnect plug in parked position.

TOPJOB®S
Fuse Terminal Blocks for Mini-Automotive Blade-Style Fuses 6 (10) mm²
2006 Series

0.5 - 6 (10) mm² ❶ | AWG 20 - 8 **500 V/8 kV/3 ❷** **I_N 25 A (30 A) ❸** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❹**	**0.5 - 6 (10) mm² ❶ | AWG 20 - 8** **500 V/8 kV/3 ❷** **I_N 25 A (30 A) ❸** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❹**	**0.5 - 6 (10) mm² ❶ | AWG 20 - 8** **500 V/8 kV/3 ❷** **I_N 25 A (30 A) ❸** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❹**

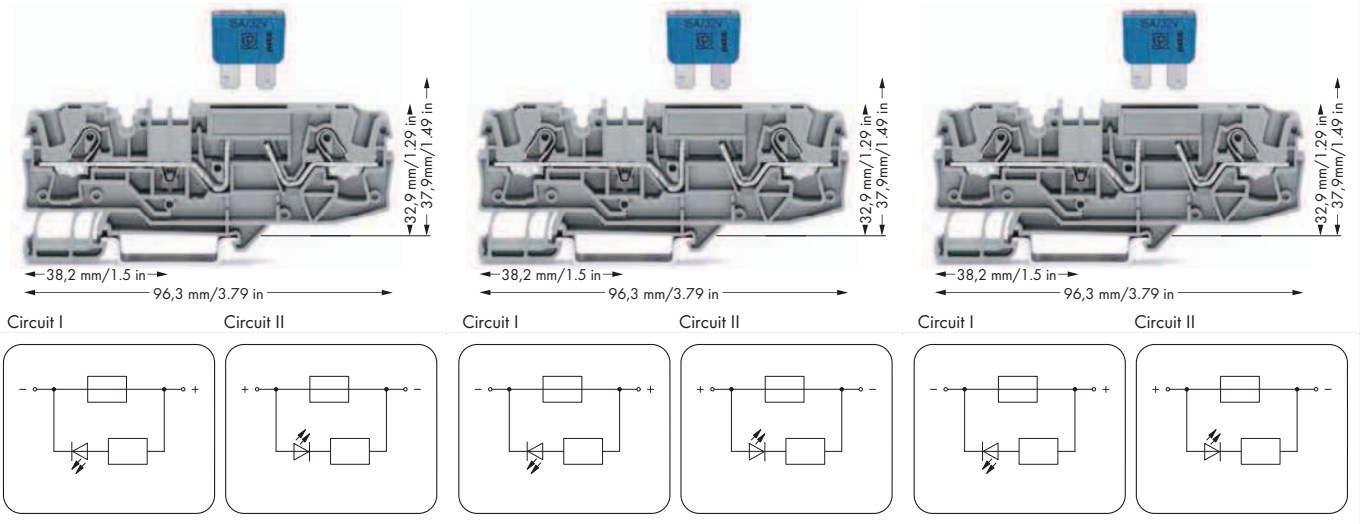

Item No.		Pack. Unit
2-conductor fuse terminal block for mini-automotive blade-style fuses,		
12V, with test point, with blown fuse indication by LED,		
LED power consumption: 4.8 mA, gray		
Nominal voltage and current are given by the LED or fuse.		
Blade-style fuses, please note touchproof protection for		
42V and higher.		
◯ Circuit I	**2006-1681/1000-429**	25
◯ Circuit II	**2006-1681/1000-449**	25
Other terminal blocks with the same profile:		
Through	**2006-1601**	Page 108

Item No.		Pack. Unit
2-conductor fuse terminal block for mini-automotive blade-style fuses,		
24V, with test point, with blown fuse indication by LED,		
LED power consumption: 4.8 mA, gray		
Nominal voltage and current are given by the LED or fuse.		
Blade-style fuses, please note touchproof protection for		
42V and higher.		
◯ Circuit I	**2006-1681/1000-413**	25
◯ Circuit II	**2006-1681/1000-434**	25

Item No.		Pack. Unit
2-conductor fuse terminal block for mini-automotive blade-style fuses,		
48V, with test point, with blown fuse indication by LED,		
LED power consumption: 4.8 mA, gray		
Nominal voltage and current are given by the LED or fuse.		
Blade-style fuses, please note touchproof protection for		
42V and higher.		
◯ Circuit I	**2006-1681/1000-414**	25
◯ Circuit II	**2006-1681/1000-435**	25

2006 Series Accessories

Appropriate marking systems: WMB/Marking strips
(see Section 13)

End and intermediate plate, 1 mm thick



orange	**2006-1692**	100 (4x25)
gray	**2006-1691**	100 (4x25)

Push-in type jumper bar, insulated,



I_N 41 A, light gray

2-way	**2006-402**	50 (2x25)
3-way	**2006-403**	50 (2x25)
4-way	**2006-404**	50 (2x25)
5-way	**2006-405**	50 (2x25)

Push-in type jumper bar, insulated,



I_N 41 A, light gray

from 1 to 3	**2006-433**	50 (2x25)
from 1 to 4	**2006-434**	50 (2x25)
from 1 to 5	**2006-435**	50 (2x25)

Protective warning marker,



with high-voltage symbol, black, for 5 terminal blocks

yellow	**2006-115**	100 (4x25)

WMB Multi marking system,

10 strips with 10 markers per card, stretchable 5 - 5.2 mm

plain	**793-5501**	5

Marking strip, plain,



11 mm wide, 50 m roll

white	**2009-110**	1

Double-deck marker carrier,



pivoting

gray	**2002-121**	50 (2x25)

For list of approvals and user guide, see pages 634 to 637.

0.5 - 6 (10) mm² ❶ | AWG 20 - 8
500 V/8 kV/3 ❷
I_N 25 A (30 A) ❸

Terminal block width 7.5 mm / 0.295 in
13 - 15 mm / 0.55 in ❹

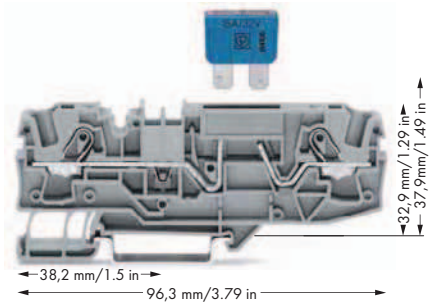

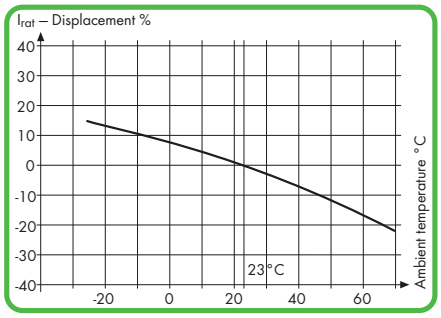

❶ Conductor sizes: 0.5 mm² – 10 mm² "s + f-st"; Push-in conductor sizes: 1 mm² – 10 mm² "s" and 1.5 mm² – 6 mm² "insulated ferrule, 12 mm"

❷ 500 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❸ LED power consumption: 4.8 mA

❹ Strip length, see packaging or instructions.

	Item No.	Pack. Unit
2-conductor fuse terminal block for mini-automotive blade-style fuses,		
with test point,		
without blown fuse indication		
Nominal voltage and current are given by the fuse. Blade-style fuses, please note touchproof protection for 42V and higher.		
gray	**2006-1681**	25

Blade-style fuses
(not offered by WAGO)

Excess-current circuit-breaker, thermal
(not offered by WAGO)
Recommended excess-current circuit-breakers from ETA

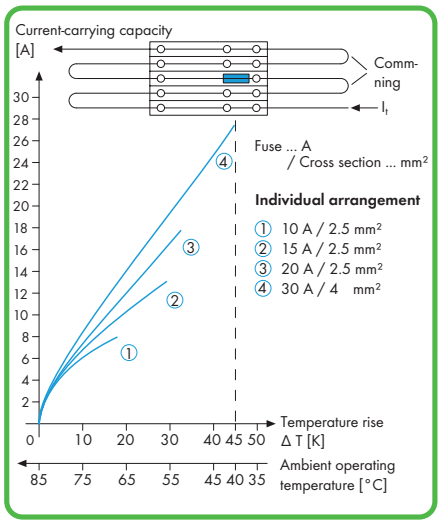

Diagram: Individual arrangement

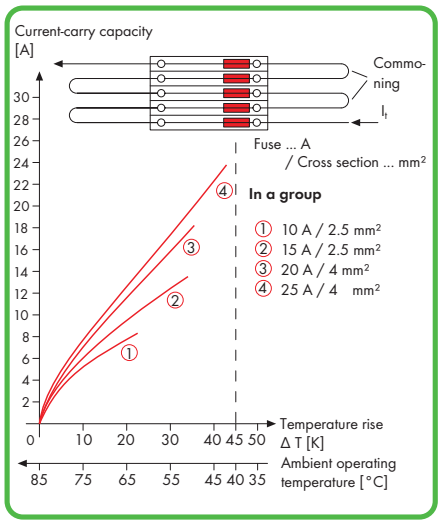

Diagram: Block arrangement

The rated currents of the fuse cartridges are defined differently in international standards. Due to the different current rating definitions, the recommended current-carrying permanent capacity of the fuses is max. 80% of their rated current according to DIN 72581 part 3 (for an ambient operating temperature of 23 °C).
Selecting the correct fuse cartridge is important for product safety within applications, as well as for fuse cartridge service life and reliability. Fuse cartridges may be used as protection (break-off point) if they are properly selected and used according to manufacturer specifications.

Information from the mini-automotive blade-type fuse manufacturers

Derating T_{amb} /°C	%	F_T
- 25	14	0.877
- 20	13	0.885
- 15	12	0.893
- 10	11	0.901
- 5	10	0.909
0	9	0.917
5	8	0.926
10	6	0.943
15	4	0.962
20	2	0.980
23	0	1.000
30	- 2	1.020
35	- 4	1.042
40	- 6	1.064
45	- 8	1.087
50	- 10	1.111
55	- 13	1.149
60	- 16	1.190
65	- 19	1.235
70	- 22	1.282

Regarding product safety, it is in generally necessary to test fuse cartridges under normal conditions and operational failures within your application.

TOPJOB®S
Fuse Disconnect Terminal Blocks with Pivoting Fuse Holder for Miniature Metric Fuses 5 x 20 mm, 5 x 30 mm, ¼" x1¼", 2006 Series

CAGE CLAMP®S

0.5 - 6 (10) mm² ❶ | AWG 20 - 8 800 V/8 kV/3 ❷ | 600 V, 15 A I_N 10 A Terminal block width 7.5 mm / 0.295 in 13 - 15 mm / 0.55 in ❸	0.5 - 6 (10) mm² ❶ | AWG 20 - 8 800 V/8 kV/3 ❷ I_N 10 A Terminal block width 7.5 mm / 0.295 in 13 - 15 mm / 0.55 in ❸

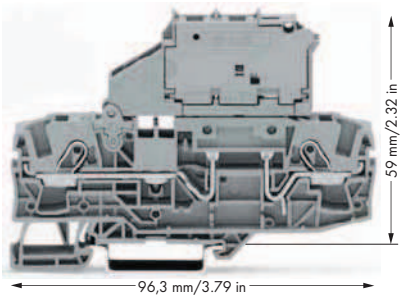

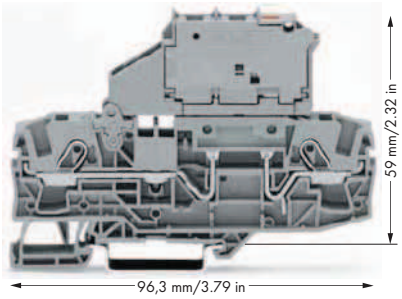

❶ Conductor sizes: 0.5 mm² – 10 mm² "s + f-st"; Push-in conductor sizes: 1 mm² – 10 mm² "s" and 1.5 mm² – 6 mm² "insulated ferrule, 12 mm"

❷ 800 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(see Section 14)

❸ Strip length, see packaging or instructions.

❹ See application notes for:
Star point jumper, page 140

	Item No.	Pack. Unit
2-conductor fuse disconnect terminal block with pivoting fuse holder,		
without blown fuse indication		
Nominal voltage and current are given by the fuse.		
for miniature metric fuses 5 x 20 mm		
gray	**2006-1611**	25
for miniature metric fuses 5 x 30 mm		
gray	**2006-1621**	25
for miniature metric fuses 1/4" x 11/4"		
gray	**2006-1631**	25

	Item No.	Pack. Unit
2-conductor fuse disconnect terminal block with pivoting fuse holder, gray,		
with blown fuse indication by LED		
Nominal voltage and current are given by the LED or fuse.		
Leakage current in case of blown fuse: LED 2 mA,		
for miniature metric fuses 5 x 20 mm		
12 - 30 V	**2006-1611/1000-541**	25
30 - 65 V	**2006-1611/1000-542**	25
120 V	**2006-1611/1000-867**	25
230 V	**2006-1611/1000-836**	25
for miniature metric fuses 5 x 30 mm		
12 - 30 V	**2006-1621/1000-541**	25
30 - 65 V	**2006-1621/1000-542**	25
120 V	**2006-1621/1000-867**	25
230 V	**2006-1621/1000-836**	25
380 - 500 V	**2006-1621/1000-859**	25
for miniature metric fuses 1/4" x 11/4"		
12 - 30 V	**2006-1631/1000-541**	25
30 - 65 V	**2006-1631/1000-542**	25
120 V	**2006-1631/1000-867**	25
230 V	**2006-1631/1000-836**	25
380 - 500 V	**2006-1631/1000-859**	25

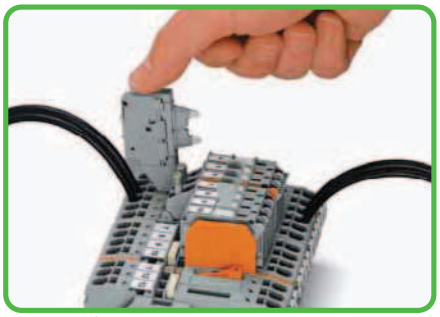

Pivoting the fuse holder in the locked open position.

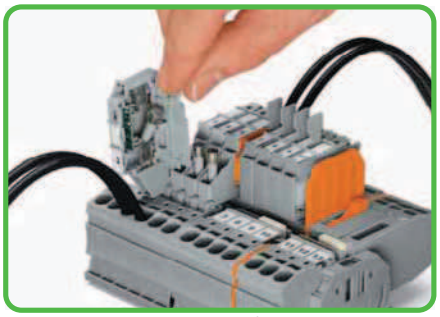

Opening the cover to replace the fuse.

2006 Series Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

End and intermediate plate, 1 mm thick			
orange	**2006-1692**	100 (4x25)	
gray	**2006-1691**	100 (4x25)	
End plate for fuse terminal blocks,			
2 mm thick			
orange	**2006-992**	100 (4x25)	
gray	**2006-991**	100 (4x25)	
Push-in type jumper bar, insulated,			
I_N 41 A,			
light gray			
2-way	**2006-402**	50 (2x25)	
3-way	**2006-403**	50 (2x25)	
4-way	**2006-404**	50 (2x25)	
5-way	**2006-405**	50 (2x25)	
Star point jumper, insulated,			
❹ I_N = I_N terminal block, light gray			
1-3-5	**2006-405/011-000**	50 (2x25)	

Push-in type jumper bar, insulated,			
I_N 41 A,			
light gray			
from 1 to 3	**2006-433**	50 (2x25)	
from 1 to 4	**2006-434**	50 (2x25)	
from 1 to 5	**2006-435**	50 (2x25)	
Protective warning marker,			
with high-voltage symbol, black,			
for 5 terminal blocks			
yellow	**2006-115**	100 (4x25)	
Test plug,			
with 500 mm cable,			
2 mm Ø			
red	**210-136**	50	
WMB Multi marking system,			
10 strips with 10 markers per card,			
stretchable 5 - 5.2 mm			
plain	**793-5501**	5	

For list of approvals and user guide, see pages 634 to 637.

TOPJOB®S
Fuse Disconnect Terminal Blocks with Pivoting Fuse Holder for Miniature Metric Fuses ¼" x 1¼", 2006 Series

0.5 - 6 (10) mm² ❶ | AWG 20 - 8 800 V/8 kV/3 ❷ | 600 V, 15 A I_N 10 A Terminal block width 10.4 mm / 0.409 in 13 - 15 mm / 0.55 in ❸	0.5 - 6 (10) mm² ❶ | AWG 20 - 8 800 V/8 kV/3 ❷ I_N 10 A Terminal block width 10.4 mm / 0.409 in 13 - 15 mm / 0.55 in ❸

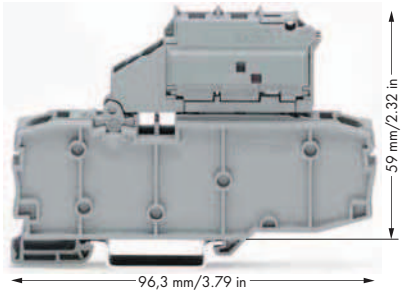

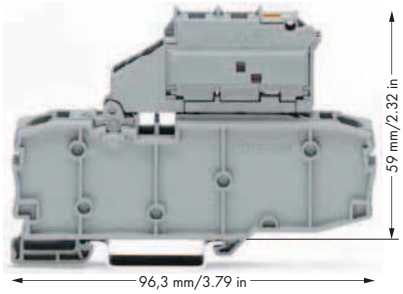

❶ Conductor sizes: 0.5 mm² – 10 mm² "s + f-st"; Push-in conductor sizes: 1 mm² – 10 mm² "s" and 1.5 mm² – 6 mm² "insulated ferrule, 12 mm"

❷ 800 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(see Section 14)

❸ Strip length, see packaging or instructions.

❹ See application notes for:
Star point jumper, page 140

	Item No.	Pack. Unit
Fuse disconnect terminal block with pivoting fuse holder and end plate, without blown fuse indication Nominal voltage and current are given by the fuse. for miniature metric fuses 1/4" x 11/4"		
gray	**2006-1631/099-000**	25

	Item No.	Pack. Unit
Fuse disconnect terminal block with pivoting fuse holder and end plate, gray, with blown fuse indication by LED Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2 mA, for miniature metric fuses 1/4" x 11/4"		
12 - 30 V	**2006-1631/1099-541**	25
30 - 65 V	**2006-1631/1099-542**	25
120 V	**2006-1631/1099-867**	25
230 V	**2006-1631/1099-836**	25
380 - 500 V	**2006-1631/1099-859**	25

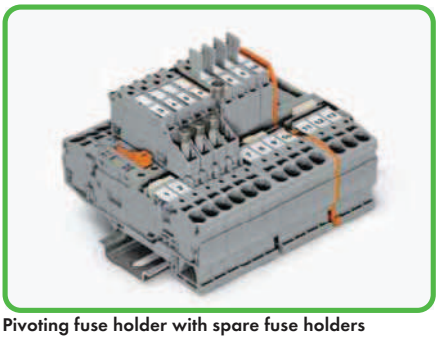

Pivoting fuse holder with spare fuse holders

Protective warning markers must be applied individually. Due to the 10.4 mm/0.409 in width of the fuse terminal blocks with pivoting fuse holder, 2002 Series jumpers must be used.

2006 Series Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

End plate for fuse terminal blocks,			
	2 mm thick		
	orange	**2006-992**	100 (4x25)
	gray	**2006-991**	100 (4x25)
Push-in type jumper bar, insulated,			
	I_N 25 A,		
	light gray		
	from 1 to 3	**2002-433**	200 (8x25)
	from 1 to 5	**2002-435**	100 (4x25)
	from 1 to 7	**2002-437**	100 (4x25)
	from 1 to 9	**2002-439**	100 (4x25)
Star point jumper, insulated,			
❹ 	I_N = I_N terminal block, light gray		
	1-3-5	**2002-405/011-000**	
			100 (4x25)
Protective warning marker,			
	with high-voltage symbol, black,		
	for 5 terminal blocks		
	yellow	**2006-115**	100 (4x25)
WMB Multi marking system,			
	10 strips with 10 markers per card,		
	stretchable 5 - 5.2 mm		
	plain	**793-5501**	5
Test plug,			
	with 500 mm cable,		
	2 mm Ø		
	red	**210-136**	50

Screwless end stop,			
	for DIN 35 rail,		
	6 mm wide		
	gray	**249-116**	100 (4x25)
Screwless end stop,			
	for DIN 35 rail,		
	10 mm wide		
	gray	**249-117**	50 (2x25)

Miniature metric fuses

Series / Item No.		Overload and short circuit protection		Short circuit protection only	
		Individual argmt.	Group argmt.	Individual argmt.	Group argmt.
		Fused disconnect terminal blocks			
2006-1611	7.5	1.6 W	1.6 W	2.5 W	2.5 W
2006-1621	7.5	1.6 W	1.6 W	2.5 W	2.5 W
2006-1631	7.5	1.6 W	1.6 W	2.5 W	2.5 W
2006-1631 /099-...	10.4	2.5 W	2.5 W	2.5 W	2.5 W
2006-1631 /1099-...	10.4	2.5 W	2.5 W	2.5 W	2.5 W

When selecting miniature metric fuses, the maximum power loss listed below should not be exceeded. The power loss is determined according to IEC or EN 60947-7-3/VDE 0611-6 at 23 °C. The temperature rise of the terminal blocks must be checked according to their application and mounting. Higher ambient temperatures represent an additional impact on miniature metric fuses. Therefore, in such applications the rated current must be reduced if necessary. More details are available from the fuse manufacturer.

For list of approvals and user guide, see pages 634 to 637.

TOPJOB®S
2004 Series Fuse Plugs on 2002 Series Carrier Terminal Blocks

Fuse plug with pull-tab
for miniature metric fuses 5 x 20 mm
250 V / I_N 6.3 A
Plug width 6.1 mm / 0.24 in





Fuse plug with pull-tab
for miniature metric fuses 5 x 20 mm
250 V / I_N 6.3 A
Plug width 6.1 mm / 0.24 in





	Item No.	Pack. Unit
Fuse plug with pull-tab, for miniature metric fuses 5 x 20 mm. Nominal voltage and current are given by the fuse.		
gray	**2004-911**	50

	Item No.	Pack. Unit
Fuse plug with pull-tab, for miniature metric fuses 5 x 20 mm, with indicator lamp, gray. Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2 mA		
12 - 30 V	**2004-911/1000-541**	50
30 - 65 V	**2004-911/1000-542**	50
120 V	**2004-911/1000-867**	50
230 V	**2004-911/1000-836**	50

Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

2-conductor carrier terminal block,
❶ 0.25 - 2.5 (4) mm² / AWG 22 - 12
Terminal block width 5.2 mm / 0.205 in
gray **2002-1661** 50

End and intermediate plate, 1 mm thick
orange **2002-1692** 100 (4x25)
gray **2002-1691** 100 (4x25)

4-conductor carrier terminal block,
❷ 0.25 - 2.5 (4) mm² / AWG 22 - 12
Terminal block width 5.2 mm / 0.205 in
gray **2002-1861** 50

End and intermediate plate, 1 mm thick
orange **2002-1892** 100 (4x25)
gray **2002-1891** 100 (4x25)

2-conductor carrier terminal block,
❸ 0.25 - 2.5 (4) mm² / AWG 22 - 12
Terminal block width 5.2 mm / 0.205 in
gray **2002-1961** 50

End and intermediate plate, 1 mm thick
orange **2002-1992** 100 (4x25)
gray **2002-1991** 100 (4x25)

Double-deck carrier terminal block,
0.25 - 2.5 (4) mm² / AWG 22 - 12
Terminal block width 5.2 mm / 0.205 in
L/L **2002-2961** 50

Double-deck carrier terminal block,
0.25 - 2.5 (4) mm² / AWG 22 - 12
Terminal block width 5.2 mm / 0.205 in
L/N **2002-2963** 50

End and intermediate plate, 1 mm thick
orange **2002-2992** 100 (4x25)
gray **2002-2991** 100 (4x25)

End plate for fuse terminal blocks,
2 mm thick
orange **2002-992** 100 (4x25)
gray **2002-991** 100 (4x25)

Shorting link, 5 x 20 mm,
if the fuse plug is used as disconnect plug
I_N 6.3 A **281-503** 250 (10x25)

Accessories

WMB Multi marking system,
10 strips with 10 markers per card, stretchable 5 - 5.2 mm
plain **793-5501** 5

WMB Multi marking system, plain,
10 strips with 10 markers per card, stretchable 5 - 5.2 mm
yellow **793-5501/000-002**
red **793-5501/000-005**
blue **793-5501/000-006**
gray **793-5501/000-007**
orange **793-5501/000-012**
light green **793-5501/000-017**
green **793-5501/000-023**
violet **793-5501/000-024**
5

For list of approvals and user guide, see pages 634 to 637.



Fuse plug dimensions:
1 66.5 mm/2.62 in for 2002-1661
2 87.5 mm/3.45 in for 2002-1861
3 72.9 mm/2.87 in for 2002-1961
4 with inserted fuse plug

Using pluggable fuse holders with rail-mount terminal blocks for control circuit protection is highly advantageous for the user since the function and the wiring are accomplished by two separate parts:

- No additional cost for assembly and wiring
- No risk of accidental contact with live parts during disconnection of fuse plug
- If exchanging a defective fuse, the fuse plug is completely separated from the carrier terminal block. This provides safe fuse changeout away from current carrying parts.
- The fuse plug can be removed by service personnel, avoiding unintentional reclosing of the circuit by another person.
- Quick replacement a fuse by using a prepared "stand-by plug."

The following fuse plug features provide quick and safe handling:

- Optional LED indicates blown fuse
- Marking slot on the fuse plug for clear coordination to the correct carrier terminal block
- Two touch-proof test slots
- High density with only 6.1 mm/0.24 in width of terminal block/fuse plug
- Instead of a fuse, a shorting link may be used as a disconnect plug.

Miniature metric fuses 5 x 20

Series Item No.	Overload and short circuit protection		Short circuit protection only	
	Individual argmt.	Group argmt.	Individual argmt.	Group argmt.
	Fuse terminal blocks			
2004-911 **2004-911/....-....**	1.6 W	1.6 W	2.5 W	2.5 W

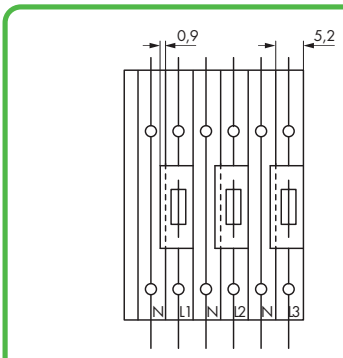

Open side of terminal block left

Please note:
The extra width of the plug (6.1 mm/0.24 in compared to 5.2 mm/0.2 in for carrier terminal blocks) must be compensated for by intermediate plates (1 mm/0.039 in) when building an assembly of carrier terminal blocks equipped with fuse plugs.

TOPJOB®S
Fuse Plugs on Carrier Terminal Blocks 6 (10) mm²
2006 Series

Fuse plug with pull-tab	Fuse plug with pull-tab	Fuse plug with pull-tab
800 V / I_N 10 A Plug width 7.4 mm / 0.291 in	800 V / I_N 10 A Plug width 7.4 mm / 0.291 in	800 V / I_N 10 A Plug width 10.4 mm / 0.409 in









Item No.		Pack. Unit
Fuse plug with pull-tab		
Nominal voltage and current are given by the fuse.		
for miniature metric fuses 5 x 20 mm		
gray	**2006-911**	25
for miniature metric fuses 5 x 30 mm		
gray	**2006-921**	25
for miniature metric fuses 1/4" x 11/4"		
gray	**2006-931**	25

Item No.		Pack. Unit
Fuse plug with pull-tab, gray,		
with indicator lamp		
Nominal voltage and current are given by the LED or fuse.		
Leakage current in case of blown fuse: LED 2 mA,		
for miniature metric fuses 5 x 20 mm		
12 - 30 V	**2006-911/1000-541**	25
30 - 65 V	**2006-911/1000-542**	25
120 V	**2006-911/1000-867**	25
230 V	**2006-911/1000-836**	25
for miniature metric fuses 5 x 30 mm		
12 - 30 V	**2006-921/1000-541**	25
30 - 65 V	**2006-921/1000-542**	25
120 V	**2006-921/1000-867**	25
230 V	**2006-921/1000-836**	25
380 - 500 V	**2006-921/1000-859**	25
for miniature metric fuses 1/4" x 11/4"		
12 - 30 V	**2006-931/1000-541**	25
30 - 65 V	**2006-931/1000-542**	25
120 V	**2006-931/1000-867**	25
230 V	**2006-931/1000-836**	25
380 - 500 V	**2006-931/1000-859**	25

Item No.		Pack. Unit
Fuse plug with pull-tab		
Nominal voltage and current are given by the fuse.		
for miniature metric fuses 1/4" x 11/4"		
gray	**2006-931/099-000**	25

Item-Specific Accessories

End and intermediate plate, 1 mm thick			
orange	**2006-1692**	100 (4x25)	
gray	**2006-1691**	100 (4x25)	



Item-Specific Accessories

End and intermediate plate, 1 mm thick			
orange	**2006-1692**	100 (4x25)	
gray	**2006-1691**	100 (4x25)	



Item-Specific Accessories

Intermediate plate, 2.9 mm thick			
orange	**2006-1696**	100 (4x25)	
gray	**2006-1695**	100 (4x25)	



Accessories fuse plugs

Appropriate marking systems: WMB/Marking strips
(see Section 13)

End plate for fuse terminal blocks,			
2 mm thick			
orange	**2006-992**	100 (4x25)	
gray	**2006-991**	100 (4x25)	



Shorting link, 5 x 20 mm,			
if the fuse plug is used as disconnect plug			
I_N 6.3 A	**281-503**	250 (10x25)	



Screwless end stop,			
for DIN 35 rail,			
6 mm wide			
gray	**249-116**	100 (4x25)	



2-conductor carrier terminal block,			
0.5 - 6 (10) mm² / AWG 20 - 8			
Terminal block width 7.5 mm / 0.295 in			
gray	**2006-1661**	25	



WMB Multi marking system,			
10 strips with 10 markers per card,			
stretchable 5 - 5.2 mm			
plain	**793-5501**	5	

Screwless end stop,			
for DIN 35 rail,			
10 mm wide			
gray	**249-117**	50 (2x25)	



For list of approvals and user guide, see pages 634 to 637.

Fuse plug with pull-tab

800 V / I_N 10 A
Plug width 10.4 mm / 0.409 in

Using pluggable fuse holders with rail-mounted terminal blocks for control circuit protection is highly advantageous for the user, as the function and the wiring are accomplished by two separate parts:
- No additional cost for assembly and wiring
- No risk of accidental contact with live parts during disconnection of fuse plug
- If exchanging a defective fuse, the fuse plug is completely separated from the carrier terminal block. This provides changeout away from current carrying parts.
- The fuse plug can be removed by service personnel, avoiding unintentional reclosing of the circuit by another person
- Quick replacement a fuse by using a prepared "stand-by plug."

The following features of the fuse plug ensure quick and safe use:
- Optional LED indicates blown fuse
- Markable fuse plug for clear coordination to the correct carrier terminal block
- Two touch-proof test slots
- High density with only 7.5 mm/0.295 in width of terminal block and fuse plug width 7.4 (10.4) mm
- Instead of a fuse, a shorting link may be used as a disconnect plug





Item No.		Pack. Unit
Fuse plug with pull-tab, gray, with indicator lamp		
Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2 mA, for miniature metric fuses 1/4" x 11/4"		
12 - 30 V	**2006-931/1099-541**	25
30 - 65 V	**2006-931/1099-542**	25
120 V	**2006-931/1099-867**	25
230 V	**2006-931/1099-836**	25
380 - 500 V	**2006-931/1099-859**	25

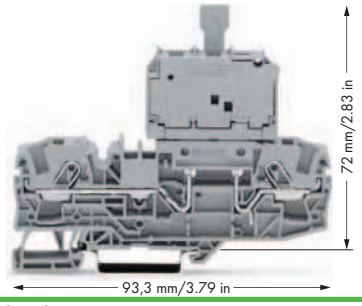

Fuse plug dimensions

Miniature metric fuse

Series Item No.		Overload and short circuit protection		Short circuit protection only	
		Individual argmt.	Group argmt.	Individual argmt.	Group argmt.
		Fused disconnect terminal blocks			
2006-911	7.5	1.6 W	1.6 W	2.5 W	2.5 W
2006-921	7.5	1.6 W	1.6 W	2.5 W	2.5 W
2006-931	7.5	1.6 W	1.6 W	2.5 W	2.5 W
2006-931 /099-...	10.4	2.5 W	2.5 W	2.5 W	2.5 W
2006-931 /1099-...	10.4	2.5 W	2.5 W	2.5 W	2.5 W



Open side of terminal block left

Item-Specific Accessories

Intermediate plate, 2.9 mm thick			
	orange	**2006-1696**	100 (4x25)
	gray	**2006-1695**	100 (4x25)

When using the 10.4 mm/0.409 in wide plug, please note:
The extra width of the plug (10.4 mm/0.409 in compared to 7.5 mm/0.295 in for carrier terminal blocks) must be compensated for by intermediate plates (2.9 mm) when building an assembly of carrier terminal blocks equipped with fuse plugs.

TOPJOB®S
Diode Terminal Blocks and LED Terminal Blocks 1.5 (2.5) mm²
2001 Series

0.25 - 1.5 (2.5) mm² ❶ | AWG 22 - 14 **U_N 250 V, U_{RM} 1000 V** **1N4007 - 0.5 A continuous current** **Terminal block width 4.2 mm / 0.165 in** **9 - 11 mm / 0.39 in ❷**	**0.25 - 1.5 (2.5) mm² ❶ | AWG 22 - 14** **U_N 250 V, U_{RM} 1000 V** **1N4007 - 0.5 A continuous current** **Terminal block width 4.2 mm / 0.165 in** **9 - 11 mm / 0.39 in ❷**	**0.25 - 1.5 (2.5) mm² ❶ | AWG 22 - 14** **24 VDC** **I_F 0.025 A max.** **Terminal block width 4.2 mm / 0.165 in** **9 - 11 mm / 0.39 in ❷**



48,5 mm/1.91 in

Circuit I Circuit II

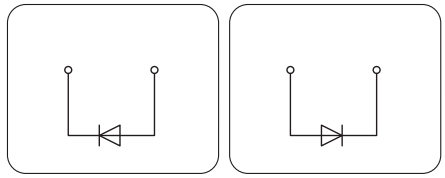



59,5 mm/2.34 in

Circuit I Circuit II

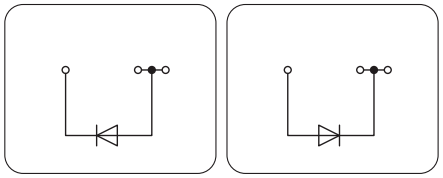



59,5 mm/2.34 in

Circuit I Circuit II

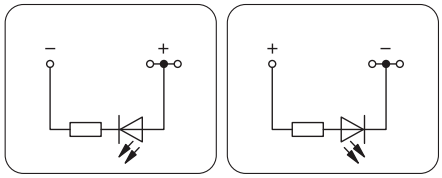

Item No.		Pack. Unit
2-conductor diode terminal block with 1N4007 diode, gray		
◯ Circuit I	**2001-1211/1000-411**	100
◯ Circuit II	**2001-1211/1000-410**	100

Item No.		Pack. Unit
3-conductor diode terminal block with 1N4007 diode, gray		
◯ Circuit I	**2001-1311/1000-411**	100
◯ Circuit II	**2001-1311/1000-410**	100

Item No.		Pack. Unit
3-conductor LED terminal block with red LED, 24 VDC, gray Notice: This LED terminal block cannot be commoned with push-in type jumper bars.		
◯ Circuit I	**2001-1321/1000-413**	100
◯ Circuit II	**2001-1321/1000-434**	100



70 mm/2.76 in

Circuit I Circuit II

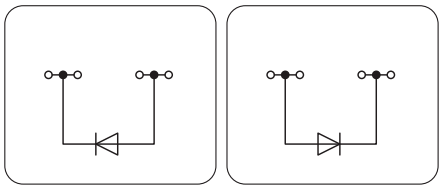



70 mm/2.76 in

Circuit I Circuit II

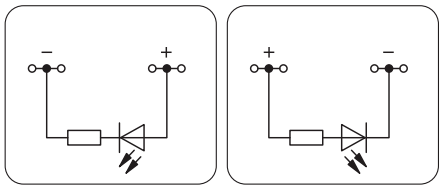

	Item No.	Pack. Unit
Through terminal blocks with same profile, see page 56		

Item No.		Pack. Unit
4-conductor diode terminal block with 1N4007 diode, gray		
◯ Circuit I	**2001-1411/1000-411**	100
◯ Circuit II	**2001-1411/1000-410**	100

Item No.		Pack. Unit
4-conductor LED terminal block with red LED, 24 VDC, gray Notice: This LED terminal block cannot be commoned with push-in type jumper bars.		
◯ Circuit II	**2001-1421/1000-413**	100
◯ Circuit I	**2001-1421/1000-434**	100

For list of approvals and user guide, see pages 634 to 637.