
Steel screw fixed cover boxes IP 66

Introduction





Technical characteristics

- Sheet-steel enclosure.
- Degree of protection: IP 66 according to IEC 60529.
- Resistance to external mechanical impacts: IK 10.
- Structured finish, polyester powder paint, RAL 7035 grey colour.
- Fixing of the cover with 4 CHc M5 × 35 shouldered captive screws.
- The enclosures are equipped with 4 backstuds for fixing the mounting plate.
- Polyurethane sealing gasket.
- Earthing screws on the body and cover for earth continuity.

Special versions

- On request, the industrial boxes can be delivered with:

– Other finishes (zinc chromate, metallised, etc.).
– Other colours.
– Etc.


See our Customised offer.


Applications


- Use in environments with a considerable risk of dust and/or liquid deposit creation.


External dimensions (mm)			(mm)				Reference
Height	Width	Depth	A	B	C	D	
200	300	150	200	300	150	127	**NSYSBS302015**
300	300	150	300	300	150	127	**NSYSBS303015**
300	400	150	300	400	150	127	**NSYSBS403015**
300	500	200	300	500	200	177	**NSYSBS503020**

Dimensions

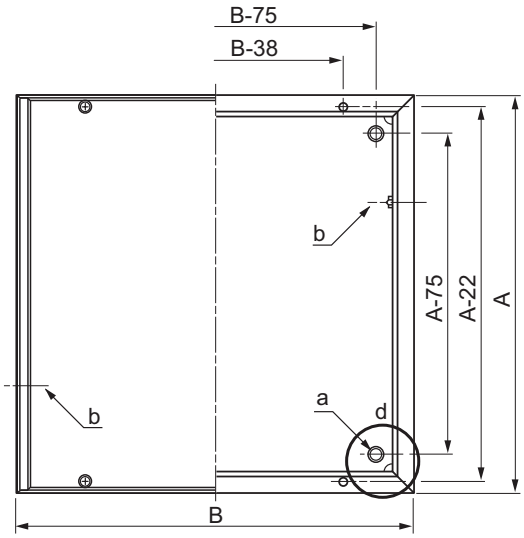


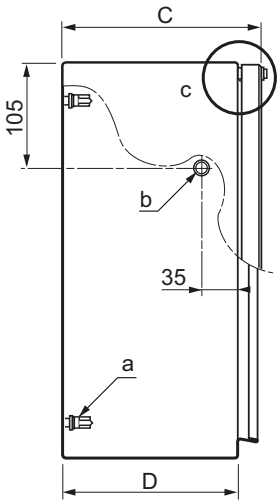

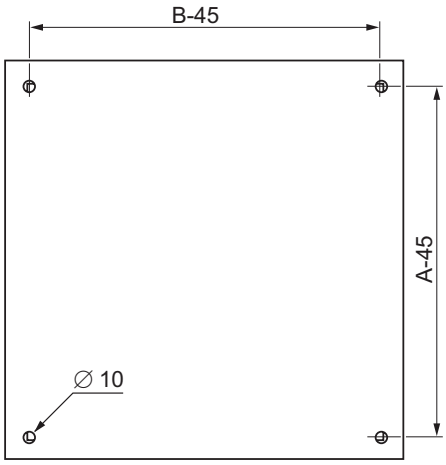





Detail a



Detail b




Detail c
(1) CHc M5 × 35 shouldered screw.
(2) Sealing washer.



Detail d
Fixing hole

Steel screw fixed cover boxes IP 66
Accessories


Mounting plates



Enclosure dimensions (mm)			Mounting plates		
Height	Width	Depth	Plain	Microperforated	Telequick
200	300	150	**NSYMM32**	**NSYMF32**	**NSYMR32**
300	300	150	**NSYMM33**	**NSYMF33**	**NSYMR33**
300	400	150	**NSYMM43**	**NSYMF43**	**NSYMR43**
300	500	200	**NSYMM35**	**NSYMF53**	**NSYMR53**

See common accessories page **7/2**.

Wall-fixing lugs



Description	Reference
Set of 4 steel fixing lugs	**NSYAEFPFSC**
Set of 4 stainless-steel fixing lugs	**NSYAEFPFXSC**

See dimensions page **2/20**.



This offer is completed by our range of Spacial S3DB terminal enclosures.

Specific

Our specific offer: special dimensions and cut-outs.
Please contact us.