product details

QTI 1X14/24/21/39/220-240



Product description:	QTI 1X14/24/21/39/220-240
EAN/ Product:	4050300796871
Quantity:	Unpacked (UNV) contains 1 Piece (PCE)

Applications	
Lamp start	preheat start within 1 s
IP code	IP20

General Description	
Sstl-Number	4030502
SEG no.	7980200
Energy Label - EEI	A2
Design / version	ECG standard
EEI not for contr. gear	A2
Standards	acc. to EN 55015; EN55022 | acc. to EN 61547 | acc. to IEC 61000-3-2/EN 61000-3-2

Logistical Data	
Product weight	303 g

Technical - Electrical Data	
Nominal voltage	220-240 V
Mains frequency	50-60 Hz
DC voltage	176...254 V
Operating frequency	45...70 kHz
Max. no. of ECGs on circuit breaker 10A	26
Max. no. of ECGs on circuit breaker 16A	41
TH full width at half maximum	500 µs
Type of current	AC/DC

Technical - Geometries	
Length	360 mm
Width	30 mm
Height	21 mm
Mounting hole spacing, length	350 mm

Technical - Temperatures	
Ambient temperature range	-20...+50 °C
Max. operating temp. at the Tc point	70 °C
Max. casing temp. in case of fault	110 °C
Relative humidity	5...85 % [1)]
Storage temperature	-40...85 °C

Packaging units

EAN	Packaging type and content	Dimensions in h x w x l	Gross weight	Volume
4050300796871	Unpacked contains 1 Piece	31,000 mm x 21,000 mm x 359,000 mm	303,000 g (0,000 g)	0,249 Cubic dec.
4050300796888	Shipping carton box contains 20 Piece	164,000 mm x 96,000 mm x 370,000 mm	6.280,000 g (0,000 g)	6,038 Cubic dec.

[1)] max. 56 d/y at 85%

Subject to change without notice. Errors and omission excepted.
© 2010 OSRAM GmbH

Wiring diagram:

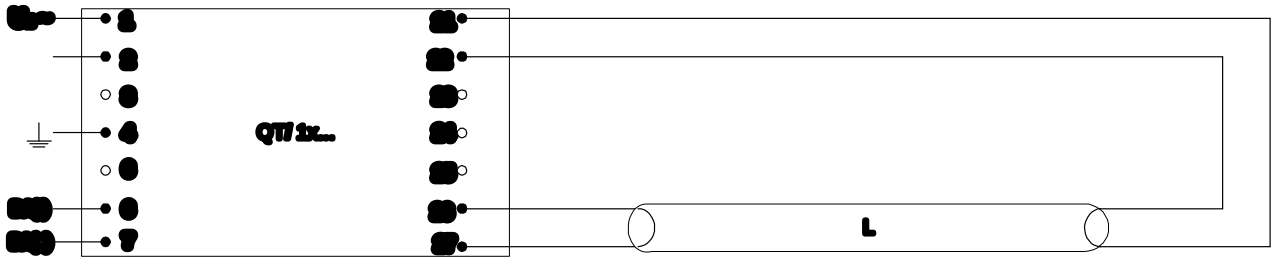

Subject to change without notice. Errors and omission excepted.
© 2010 OSRAM GmbH

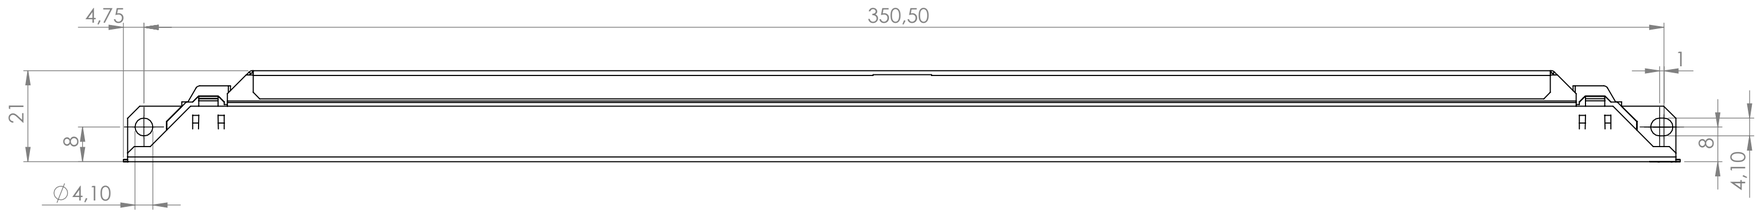



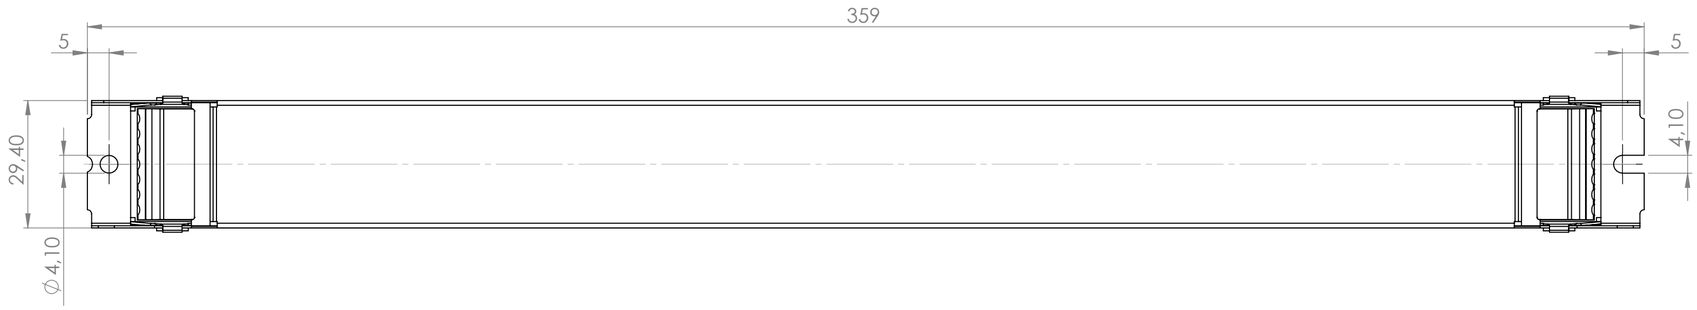

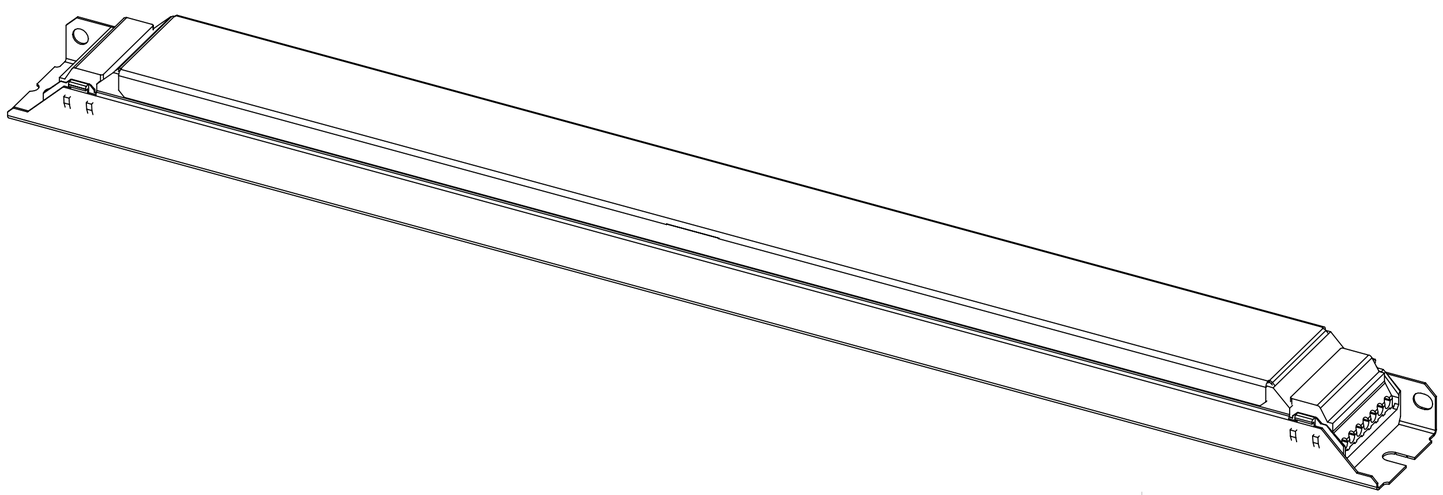

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:				DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION
	NAME	SIGNATURE	DATE				TITLE:
DRAWN							
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL:			DWG.NO: Assembly 360x30x21_QTi_ne A2
				WEIGHT:			SCALE:1:2 / SHEET 1 OF 1