MOELLER

Type: **NZMN4–4–AE1250**
Article No.: **265915**
Sales text **Circuit–breaker 4p 1250A**



Ordering information			
Number of poles			4–pole
Description			Terminal screws standard, terminals as accessories
Rated current = rated uninterrupted current	I_u	A	1250
Setting range			
Main pole	I_r	A	630...1250
Neutral conductor	I_r	A	630...1250
Switching capacity			
Switching capacity		kA	50
Release system			Electronic release
Frame size			NZM4

Notes concerning the product group

IEC/EN 60947–2

Adjustable overload release I_r

- 0.5 ... 1 × I_n (ex–works 0.8 × I_n)

Setting on neutral pole implemented via the main pole setting I_r.

R.m.s. value measurement and “thermal memory”

Adjustable short−circuit release I_i

- NZM...3−4−AE400: 2 ... 11 × I_n (ex−works 6 × I_n)
- NZM...3−4−AE630: 2 ... 8 × I_n (ex−works 6 × I_n)
- NZM...4−4−AE...: 2 ... 12 × I_n (ex−works 6 × I_n)

NZM...−4−AE...

- With 100 % overload and short−circuit protection in 4th pole

NZM...−4−AE.../...

- With 60 % overload and short−circuit protection in 4th pole

Higher switching capacity for NZMH4−4−AE...: 100 kA

Notes concerning the product group

Notes for terminals 260042

General			
Standards			IEC/EN 60947
Protection against direct contact			Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing			Damp heat, constant, according to IEC 60068−2−78 Damp heat, cyclical to IEC 60068−2−30
Ambient temperature			
Ambient temperature, Storage		°C	... 25...+70
Operation		°C	... 25...+70
Mechanical shock resistance (IEC/EN 60068−2−27)			
Shock resistance		g	15 (half−sinusoidal shock 11 ms)
Safe isolation to VDE 0106 Part 101 and Part 101/A1			
Between auxiliary contacts and main contacts		V AC	500
between the auxiliary contacts		V AC	300
Dimensions			
Weight			
Weight		kg	27
Mounting position			
Direction of incoming supply			As required
Degree of protection			

Device			In the operating controls area: IP20 (basic degree of protection)
Enclosures			With insulating surround: IP40, with door coupling rotary handle: IP66
Terminations			Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
Circuit–breakers			
Rated impulse withstand voltage U_{imp}			
Main contacts		V	8000
Auxiliary contacts		V	6000
Rated operational voltage	U_e	V AC	690
Overvoltage category/pollution degree			III/3
Rated insulation voltage	U_i	V	1000
For use in IT electrical power networks		V	525
Switching capacity			
Rated short–circuit making capacity			
240 V	I_{cm}	kA	105
400/415 V	I_{cm}	kA	105
440 V	I_{cm}	kA	74
525 V	I_{cm}	kA	53
690 V	I_{cm}	kA	40
Rated short–circuit breaking capacity I_{cn}			
I_{cu} to IEC/EN 60947 operating sequence O–t–CO			
240 V 50/60 Hz	I_{cu}	kA	50
400/415 V 50/60 Hz	I_{cu}	kA	50
415 V AC	I_{cu}	kA	50
440 V 50/60 Hz	I_{cu}	kA	35
525 V 50/60 Hz	I_{cu}	kA	25
690 V 50/60 Hz	I_{cu}	kA	20
I_{cu} to IEC/EN 60947 operating sequence O–t–CO–t–CO			
240 V 50/60 Hz	I_{cs}	kA	37
400/415 V 50/60 Hz	I_{cs}	kA	37
415 V AC	I_{cs}	kA	37

up to 440 V 50/60 Hz	I_{cs}	kA	26
525 V 50/60 Hz	I_{cs}	kA	19
up to 690 V 50/60 Hz	I_{cs}	kA	15
690 V AC	I_{cs}	kA	15
Maximum low–voltage h.b.c. fuse		A gG/gL	NZMN4–...630...1250: 2 × 630NZMN4–...1600: 2 × 800NZMN4–2000: 2 × 1000
Technical data, divergent from the products for the IEC market Switching capacity NA switches (UL489, CSA 22.2 No. 5.1)			
240 V 60 Hz		kA	85
480V 60Hz		kA	42
600 V 60 Hz		kA	35
Utilization category to IEC/EN 60947–2			B (2000A: A)
Rated short–time withstand current			
t = 0.3 s	I_{cw}	kA	19,2
t = 1 s	I_{cw}	kA	19,2
Lifespan, mechanical	Operations		10000
Maximum operating frequency			
Max. operating frequency		Ops/h	60
Lifespan, electrical			
AC–1			
400/415 V 50/60 Hz	Operations		3000
415 V	Operations		3000
690 V 50/60 Hz	Operations		2000
AC––3			
400/415 V 50/60 Hz	Operations		2000
415 V	Operations		2000
690 V 50/60 Hz	Operations		1000
Current heat loss per pole at I_u		W	97 (2000 A: 151)
Current heat loss (3–pole) at I_u		W	97
Overload releases			
to IEC/EN 60947, VDE 0660			
Temperature compensation			0
Frequency range		ms	< 25 415 V; < 35 > 415 V
Terminal capacities			
Standard equipment			Screw terminal
Accessories			


			Tunnel terminal Connection on rear Strip terminal
Rated power of coil			
Tunnel terminal			
Stranded			
4–hole		mm^2	4 × (50 – 240)
Bolt terminal and rear–side connection			
Direct on the switch			
Stranded		mm^2	1 × (120 ... 185) 4 × (50 ... 185)
Module plate			
Single hole	min.	mm^2	1 × (120 – 300)
Single hole	max.	mm^2	2 × (95 – 300)
Module plate			
Double hole	min.	mm^2	2 × (95 – 185)
Double hole	max.	mm^2	4 × (35 – 185)
Connection width extension		mm^2	4 × 300 6 × (95 – 240)
Al conductors, Cu cable			
Tunnel terminal			
Stranded			
4–hole		mm^2	4 × (50 – 240)
Bolt terminal and rear–side connection			
Module plate			
Single hole	min.	mm^2	1 × (185 – 240)
Single hole	max.	mm^2	2 × (70 – 185)
Module plate			
Double hole		mm^2	4 × 50
Connection width extension		mm^2	2 × 240 6 × (70 – 240)
Cu strip (number of segments x width x segment thickness)			
Flat conductor terminal			
	min.	mm	6 × 16 × 0.8
	max.	mm	(2 ×) 10 × 32 × 1.0
Module plate			
Single hole		mm^2	(2 ×) 10 × 50 × 1.0

Bolt terminal and rear–side connection			
Flat copper strip, with holes	min.	mm	(2 ×) 10 × 50 × 1.0
Flat copper strip, with holes	max.	mm	(2 ×) 10 × 50 × 1.0
Connection width extension		mm^2	(2 ×) 10 × 80 × 1.0
Copper busbar (width × thickness)			
Bolt terminal and rear–side connection			
Screw connection			M10
Direct on the switch			
	min.	mm^2	25 × 5
	max.	mm^2	2 × (50 × 10) 2 × (80 × 10)
Module plate			
Single hole	min.	mm^2	25 × 5
Single hole	max.	mm^2	2 × (50 × 10)
Module plate			
Double hole		mm^2	2 × (50 × 10)
Connection width extension			
Connection width extension	min.	mm^2	60 × 10
Connection width extension	max.	mm^2	2 × (80 × 10)
Notes			
Notes			For rated operational voltage the following applies: DC voltage values on request For switching capacity of NA switches with NZM...1–...NA the following applies: 480Y/277 V from 60 A For rated operational current AC–3 at NZMB2, NZMN2, NZMH2, NZM4 the following applies: 400 V: max. 650 kW; 600 V: max. 600 kW For switching capacity of NA switches with NZML2 and NZML3 the following applies: current limiting switch to UL489 For overload release temperature compensation NZM2 thermomagnetic the following applies: with NZM1...1–...160: 0.4 For switching capacity of NA

			switches with NZML4 at 240 V 60 Hz the following applies: please enquire The current heat loss per pole ratings refer to the maximum current rating of the frame size.

Mounting position

Vertical and 90° in all directions



With plug–in adapterNZM2, N(S)2: vertical, 90° right/left

With withdrawable unit, NZM3, N(S)3: vertical, 90° left, NZM4, N(S)4: vertical, with remote operator: NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° to all directions

mit FehlerstromauslöserNZM2: senkrecht und 90° nach allen Richtungen

Overview

Basic equipment				
Box terminal	●	–	–	–
Screw connection	–	●	●	●
Accessories				
Box terminal	–	●	●	–
Screw connection	●	–	–	●
Tunnel terminal	●	●	●	●
Connection on rear	●	●	●	●
Flat conductor terminal	–	–	–	●

Notes


For rated operational voltage switching on 3 contacts the following applies: DC correction factor for instantaneous release response value NZM1: 1.25, NZM2: 1.35


Setting for I_i at DC = setting I_i AC/DC correction factor

Details apply for 3–pole system protection circuit–breaker with thermomagnetic release NZM(H)1(2)–A...

Switching of one pole via two series contacts

Switching of one pole via three series contacts





For NA switch switching capacity with NZM...1−...(C)NA the following applies: 480 Y/277 V from 60 A

For AC−3 rated operational current with NZM4 the following applies: 400 V: max. 650 kW; 690 V: max. 600 kW

For NA switch switching capacity with NZML2 and NZML3 the following applies: Current Limiting switch to UL489

For 3−pole system protection circuit−breaker the AC−3 specification is not applicable

For NA switch switching capacity with NZML4 at 240 V 60 Hz the following applies: on request

For current heat loss per pole the specification refers to the maximum nominal current of the frame size.

For 3−pole system protection circuit−breaker the following applies: 690 V

For 3−pole system protection circuit−breaker the following applies: 400/415 V 7500 switching operations

Maximum back−up fuse, if the expected short−circuit currents at the installation location exceed the switching capacity of the circuit−breaker.

≦ 1600 A

Higher switching capacity on request

Notes


XSV = plug−in unit

XAV = withdrawable unit

TM = thermomagnetic


E = electronic

Dimensions

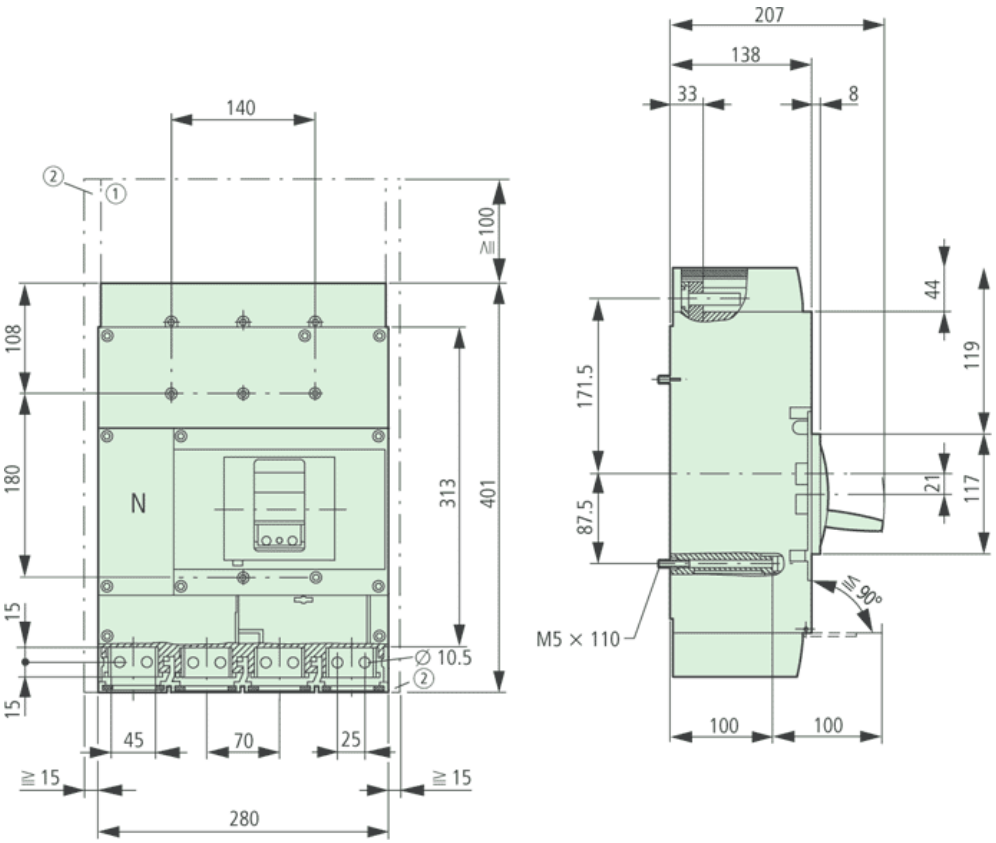

Arcing chamber, minimum clearing to neighbouring parts 100 mm
Minimum clearance from adjacent parts 15 mm

Characteristic curve

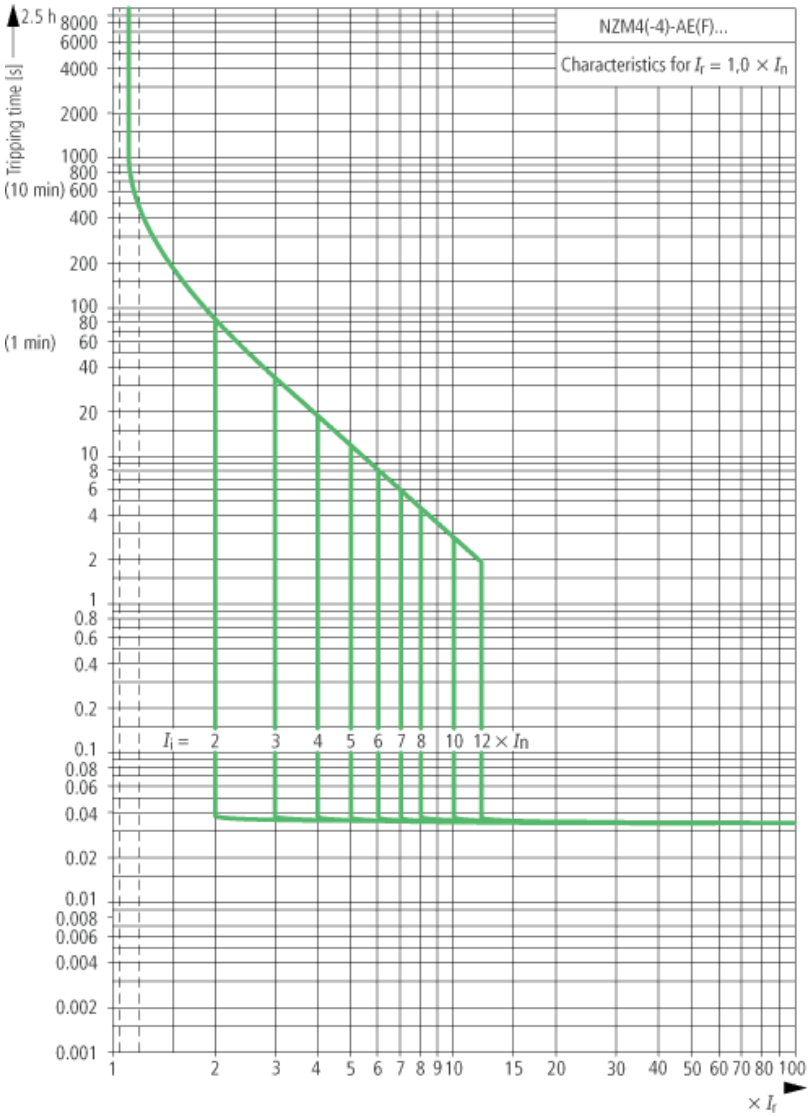

System and line protection with NZM4

Moeller GmbH, Hein–Moeller–Str. 7–11, D–53115 Bonn
E–Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net
HPL–C2007G V2.1 © 2007 by Moeller GmbH