
Compact NSX100-250
FPower NSX / GV7

Plug-in base
Socle débrochable
Zócalo extraíble



GHD16276AA-09

Schneider Electric Industries SAS
35, rue Joseph Monier
CS 30323
F - 92506 Rueil Malmaison Cedex

www.schneider-electric.com

© 2013 Schneider Electric.
All rights reserved.

PLEASE NOTE

■ Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel.
■ No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

REMARQUE IMPORTANTE


■ L'installation, l'utilisation, la réparation et la maintenance des équipements électriques doivent être assurées par du personnel qualifié uniquement.
■ Schneider Electric décline toute responsabilité quant aux conséquences de l'utilisation de cet appareil.


TENGA EN CUENTA


■ La instalación, manejo, puesta en servicio y mantenimiento de equipos eléctricos deberán ser realizados sólo por personal cualificado.
■ Schneider Electric no se hace responsable de ninguna de las consecuencias del uso de este material.


请注意


■ 电气设备的安装、操作、维修和维护工作仅限于合格人员执行。
■ Schneider Electric不承担由于使用本资料所引起的任何后果。

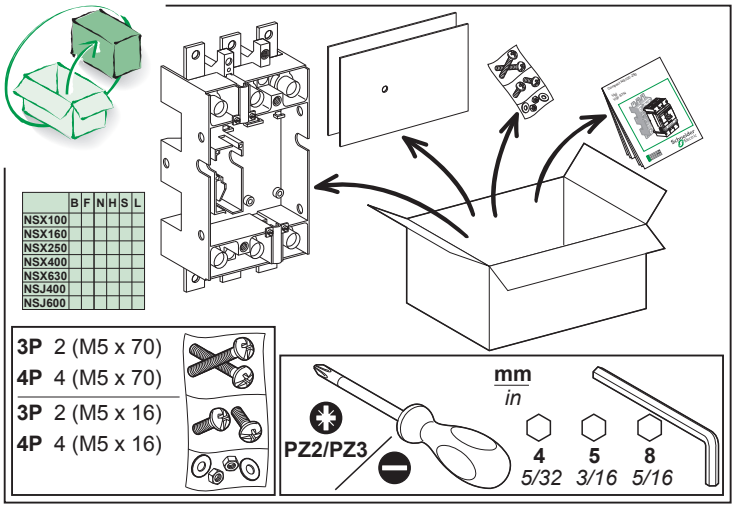


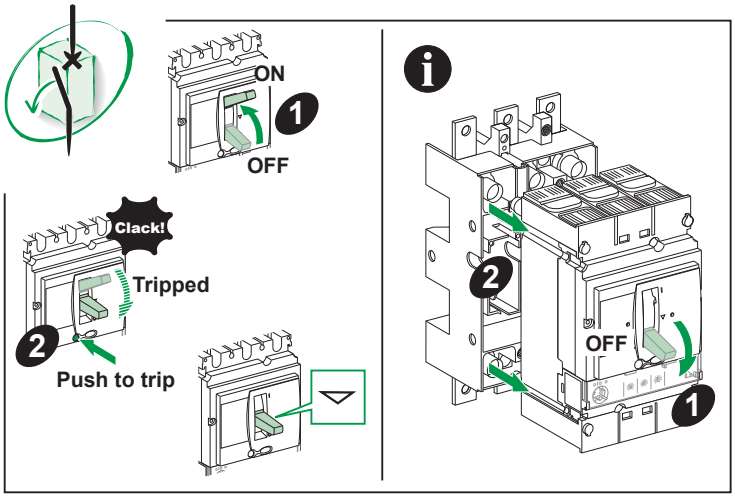

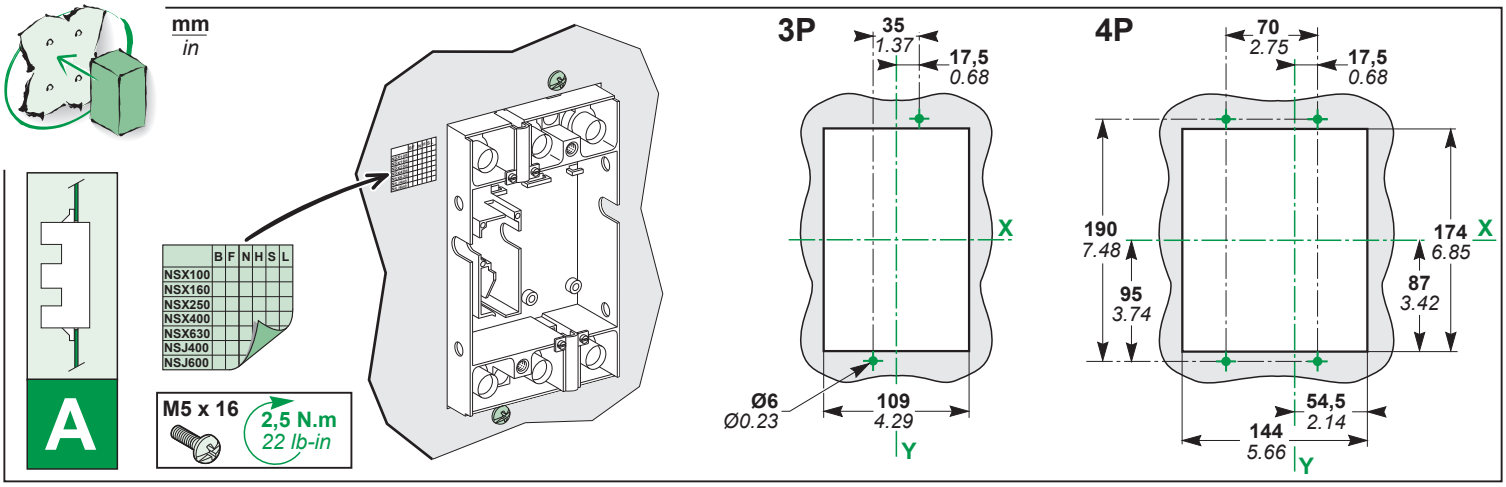


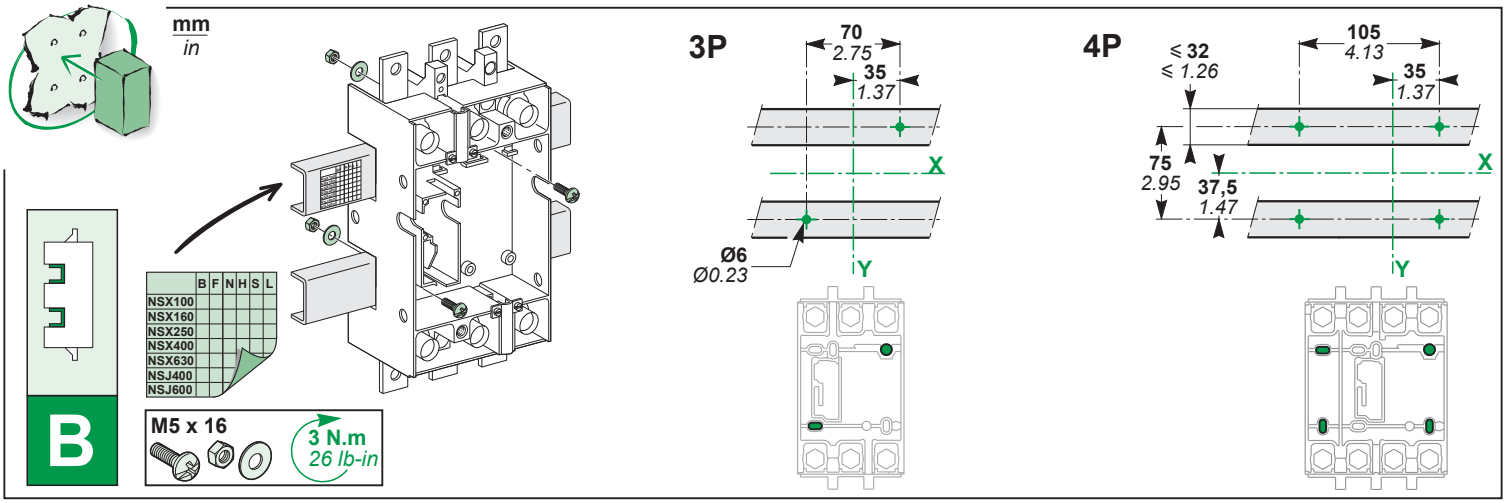


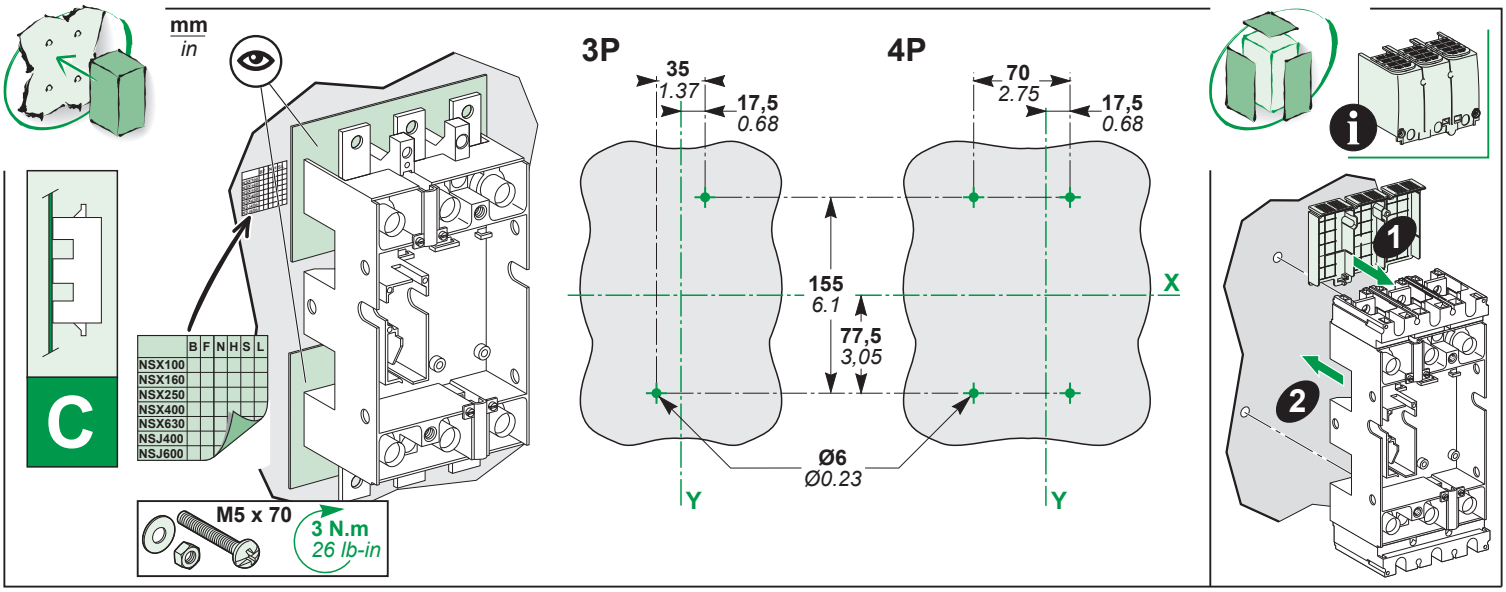

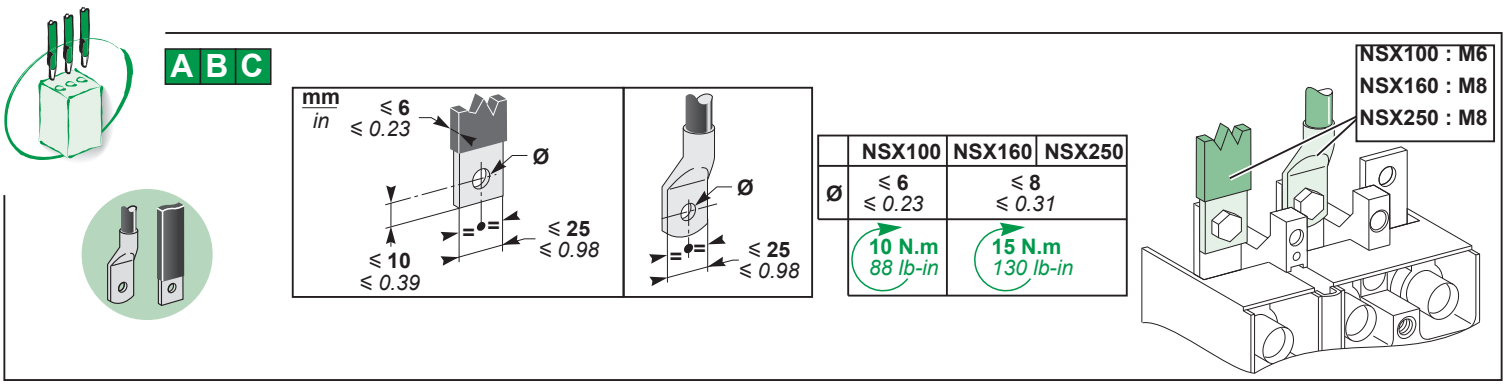


	NSX100	NSX160	NSX250
Ø	≤ 6 ≤ 0.23	≤ 8 ≤ 0.31	
	10 N.m 88 lb-in	15 N.m 130 lb-in	

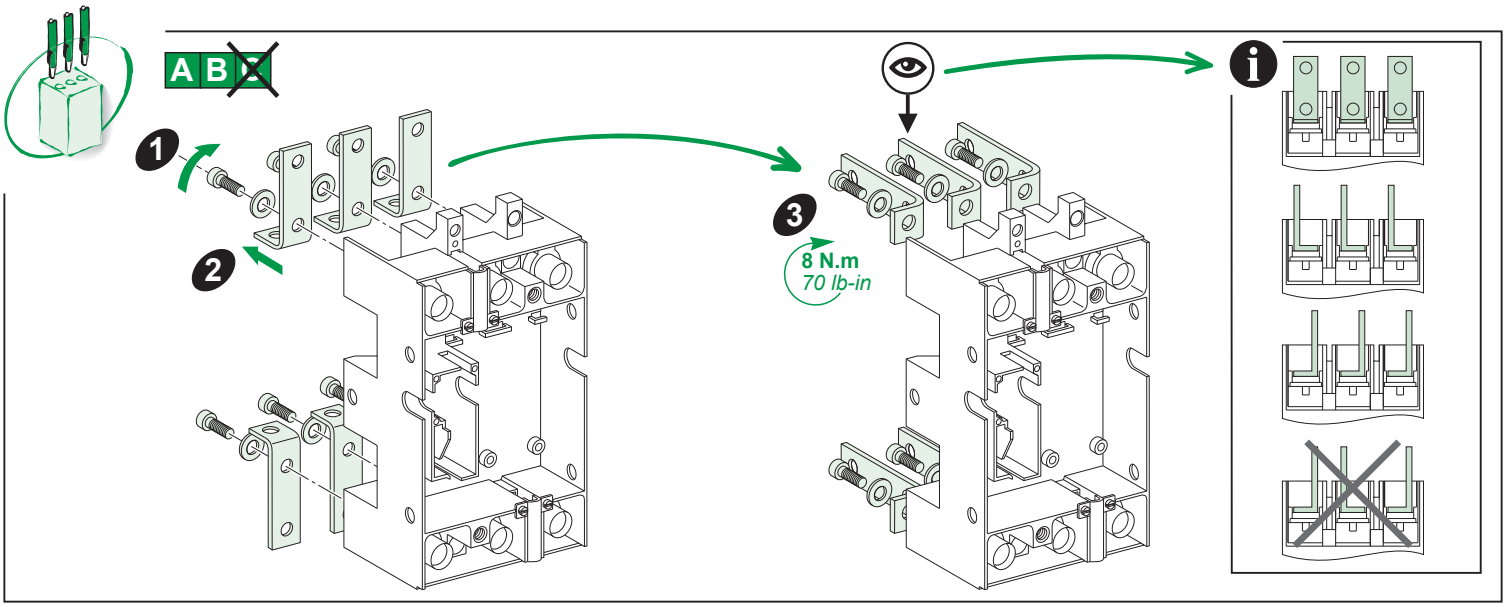

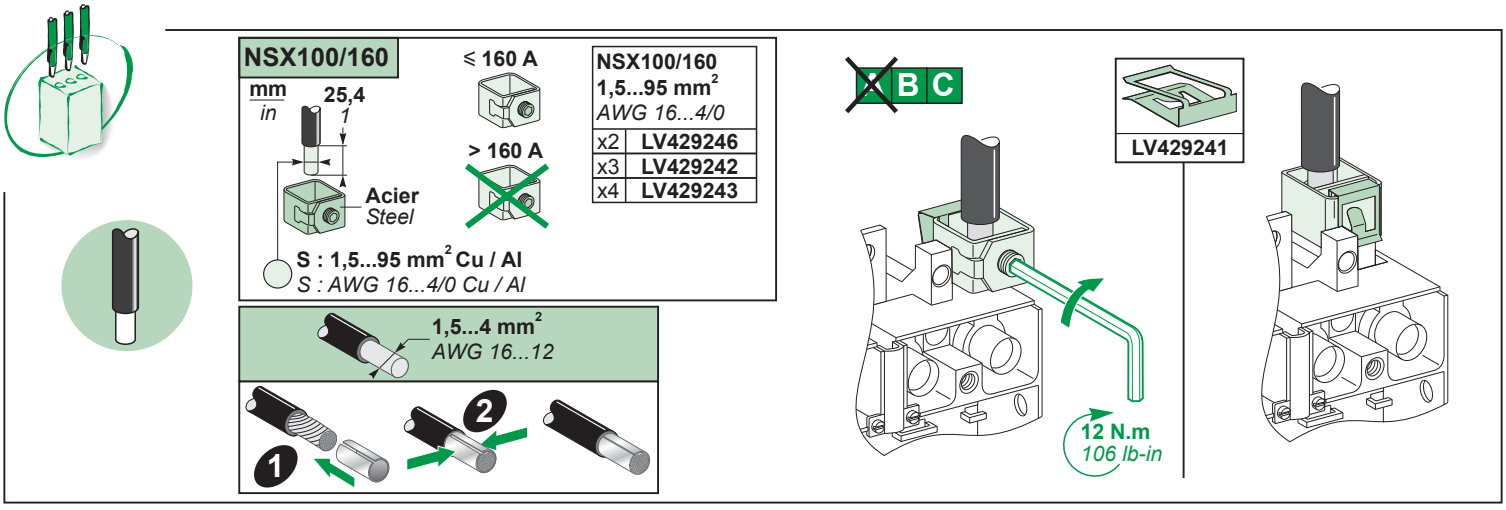


NSX100/160 1,5...95 mm² AWG 16...4/0	
x2	LV429246
x3	LV429242
x4	LV429243





NSX100-250







LV429241




NSX100-250		
	25...95 mm² *AWG 4...4/0*	120...185 mm² *250...350 kcmil*
x2	LV429255	LV429247
x3	LV429227	LV429259
x4	LV429228	LV429260








Aluminium
Aluminium




N.m *lb-in*




see instruction GHD16314AA
1 cable / 2 cables connector



3P **LV429218**
4P **LV429219**




Aluminium
Aluminium




N.m *lb-in*




see instruction GHD16314AA
1 cable / 2 cables connector











C'

mm
in





3P **3xLV429276**
4P **4xLV429276**


3P

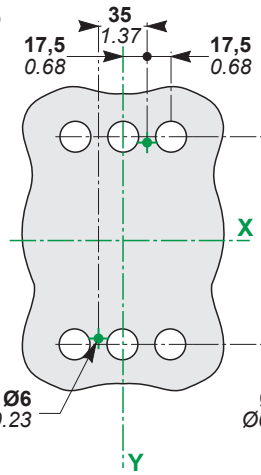

4P

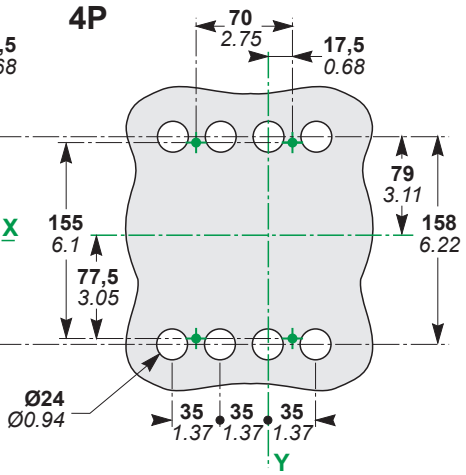







C''

mm
in




3P **3xLV429276**
4P **4xLV429276**

3P

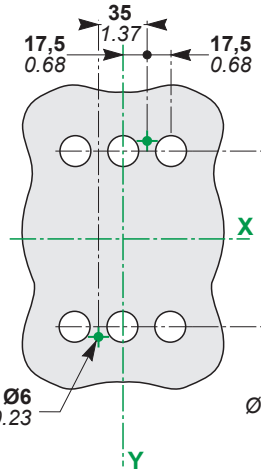


4P

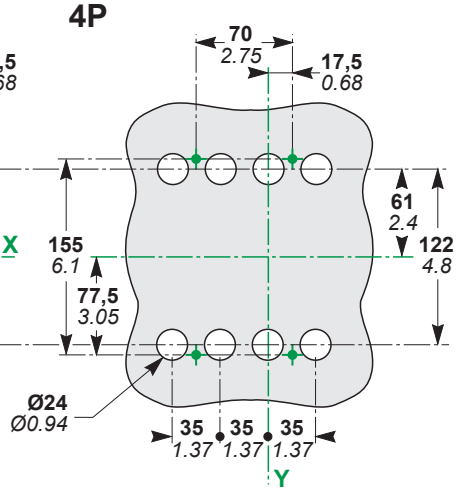



U ⩽ 500 V ⎓


3P

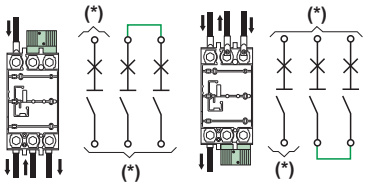

(*)
(*)
(*)
(*)



Page
2/6
3/6
(*)

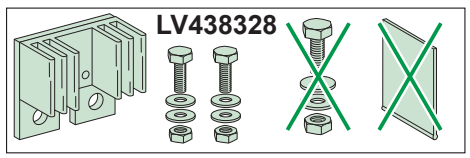
LV438328

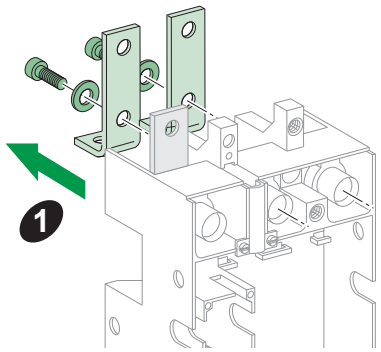

1

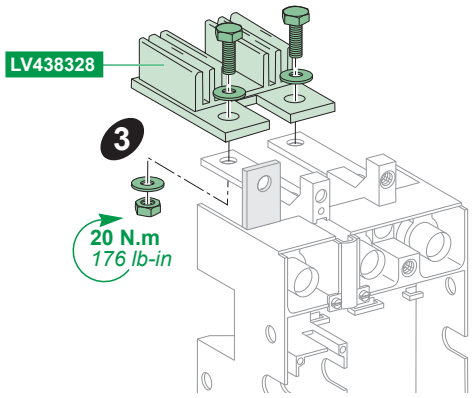

LV438328
3
20 N.m
176 lb-in

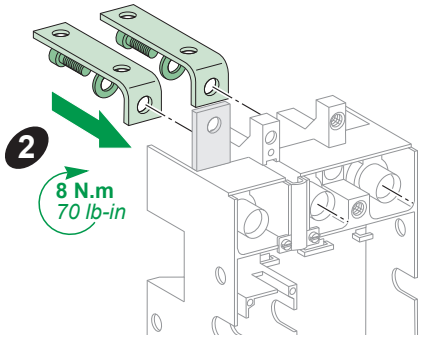

2
8 N.m
70 lb-in

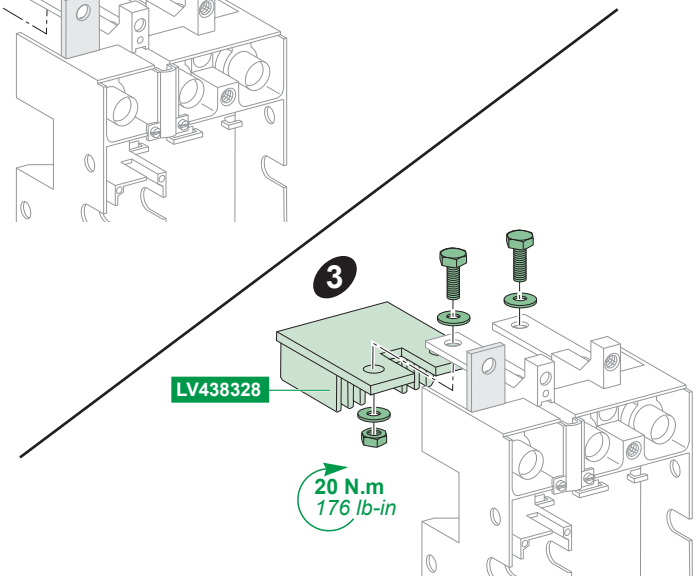

3
LV438328
20 N.m
176 lb-in


4P

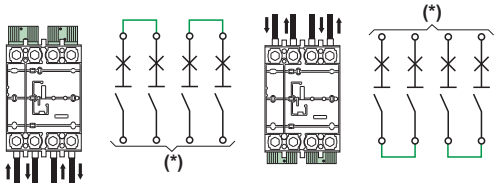

(*)
(*)



Page
2/6
3/6
(*)

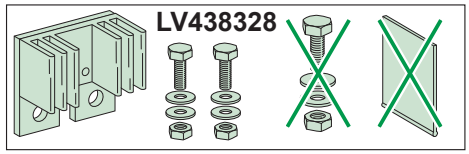
LV438328

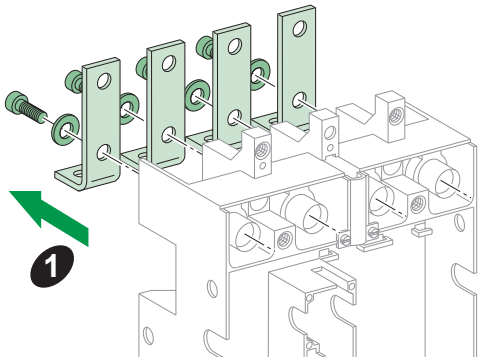

1

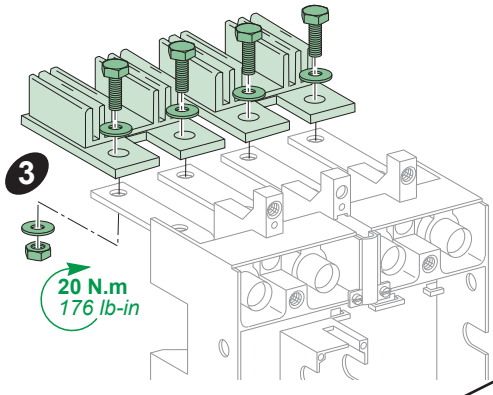

3
20 N.m
176 lb-in

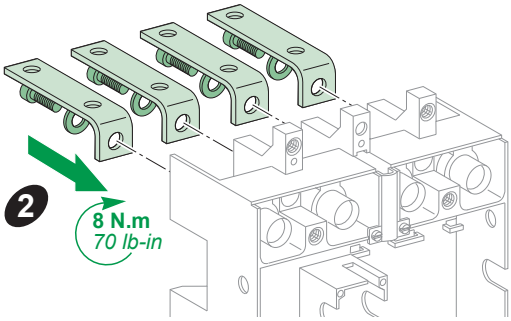
2
8 N.m
70 lb-in

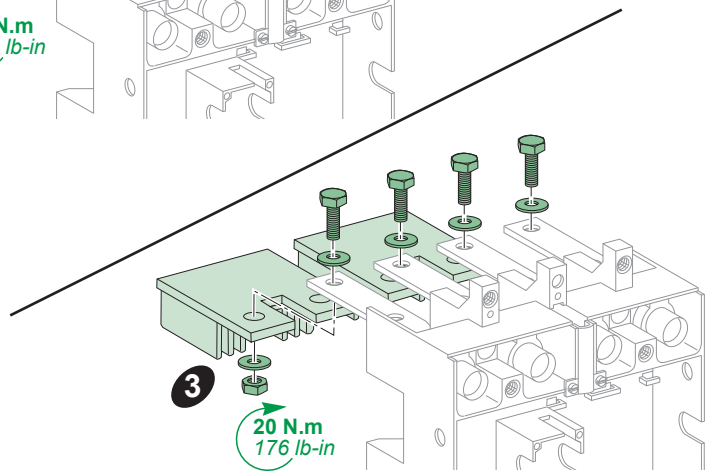

3
20 N.m
176 lb-in

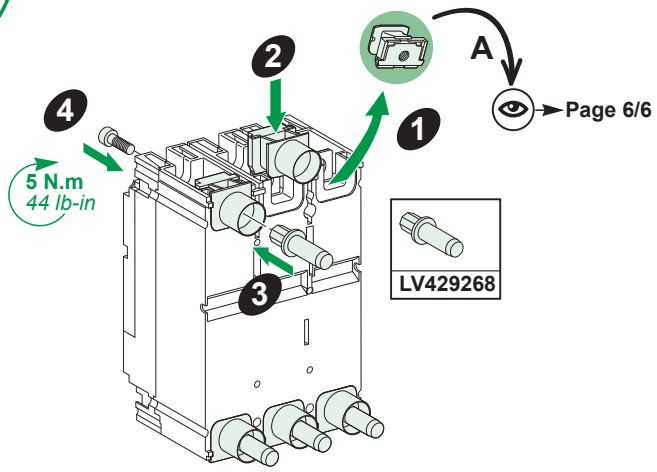



A
Page 6/6
5 N.m
44 lb-in
LV429268

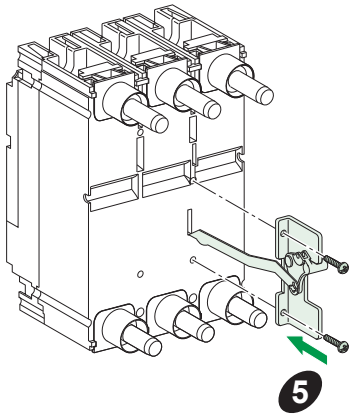
LV429270






3P LV429515
4P LV429516


1,2 N.m
10.5 lb-in

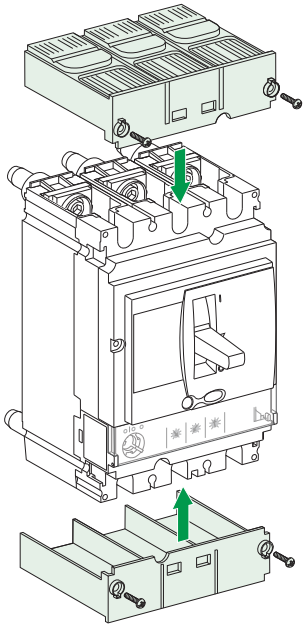


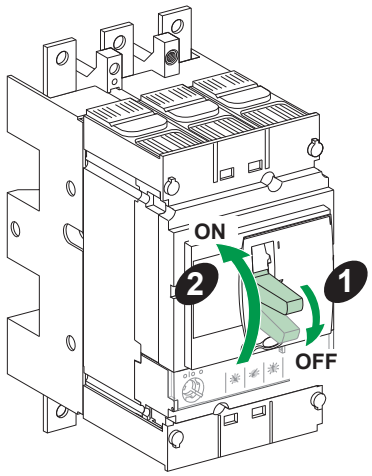



ON
OFF

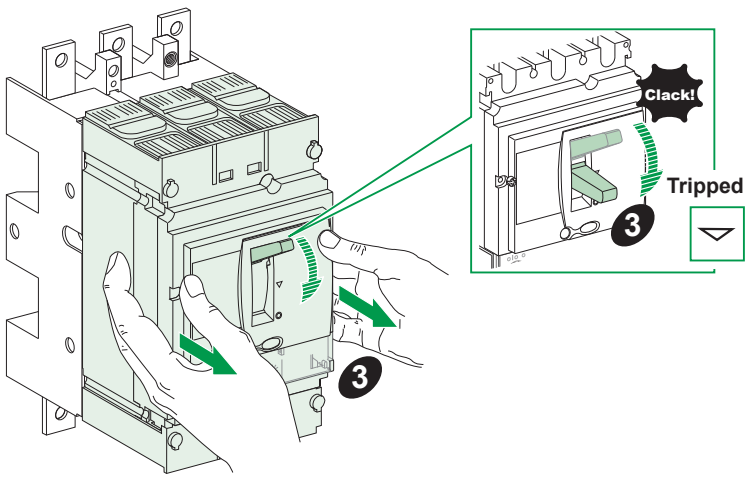

Clack!
Tripped

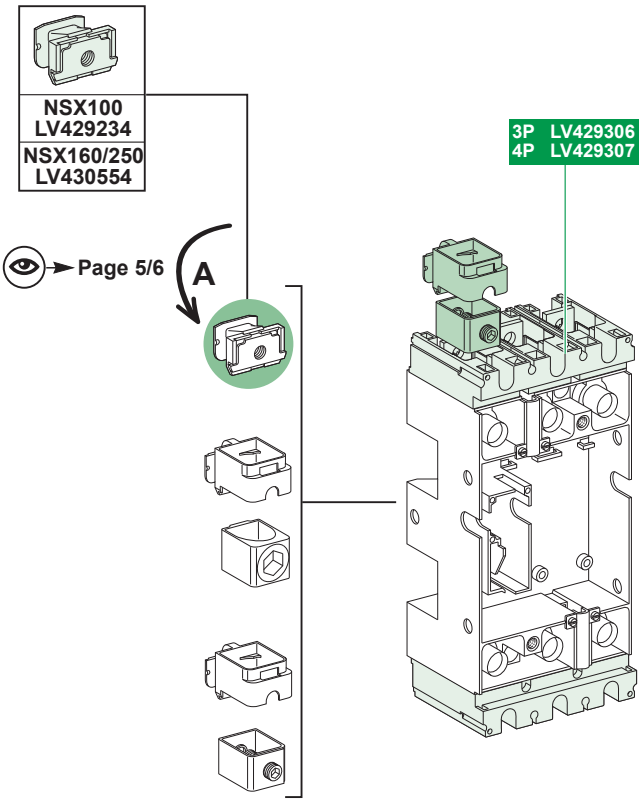




NSX100
LV429234
NSX160/250
LV430554
Page 5/6
A
3P LV429306
4P LV429307





3P LV429517
4P LV426518
8
0,9 N.m
7.9 lb-in
9
1 N.m
9 lb-in

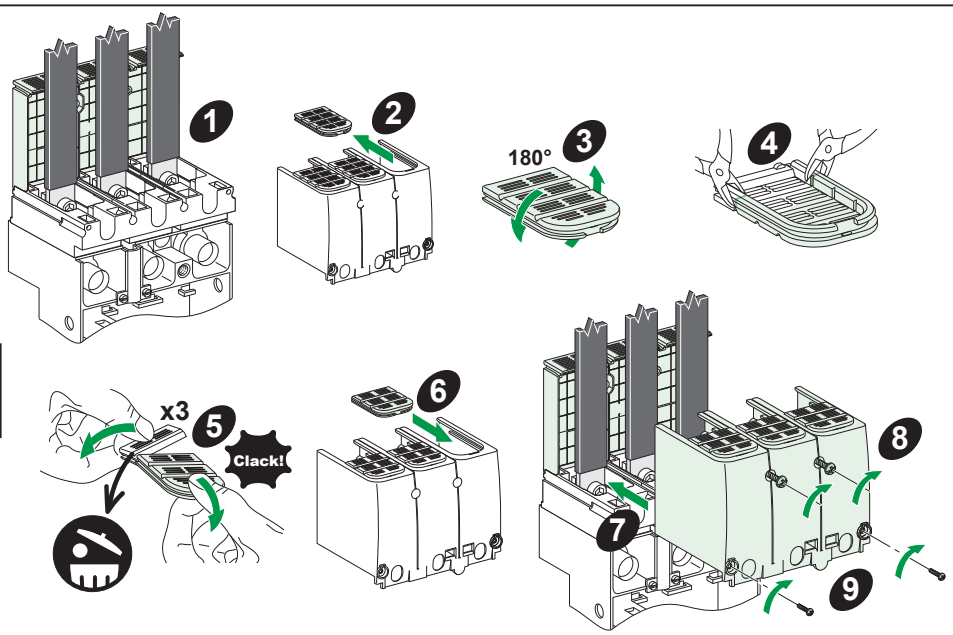
1
2
180°
3
4
x3
5
Clack!
6
7
8
9

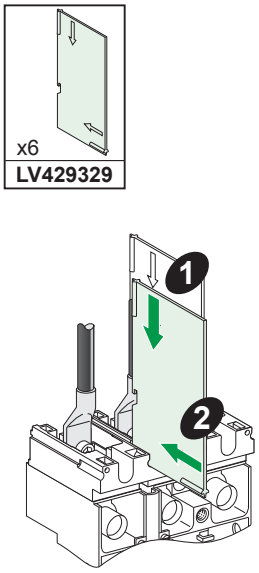
x6
LV429329
1
2




2,5 N.m
22 lb-in
M5 x 70

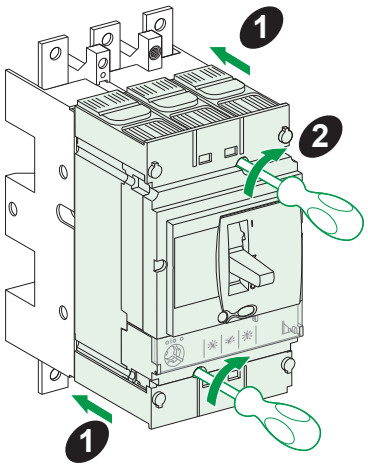
1
2
1