Tecxus Alkaline maximum

- high efficiency, for devices with high energy requirements
- long lifetime for applications with constant and low energy consumption
- up to 7 years shelf life without loss of performance, heat and cold resistant
- contains no mercury and cadmium

LR03/AAA (Micro)

alkaline manganese battery, 1.5 V
44.5 x 10.5 mm








23809	76795	23631	23630	23778	23817
2 x Blister	2 x Shrink-Pack	4 x Blister	4 x Shrink-Pack	10 x Blister	24 x XXL-Box

LR6/AA (Mignon)

alkaline manganese battery, 1.5 V
50.5 x 14.5 mm








23810	38436	23633	23632	23761	23818
2 x Blister	2 x Shrink-Pack	4 x Blister	4 x Shrink-Pack	10 x Blister	24 x XXL-Box

LR14/C (Baby)

alkaline manganese battery, 1.5 V
49.5 x 25.8 mm



23635
2 x Blister

LR20/D (Mono)

alkaline manganese battery, 1.5 V
60.9 x 32 mm



23637
2 x Blister

alkaline manganese battery, 9 V
25.5 x 16 x 48.5 mm



23639
1 x Blister

Alkaline Battery

Type Designition ANSI:		**9V Block**
Designition IEC:		**6LR61**
System:		**Electrolyte-zinc-manganese dioxide (mercury & cadmium free)**
Nominal Voltage (V):		**9**
Typical Capacity (mAh):		**550**
Operating Temperature (°C):		-20 to +54
Storage Temperature (°C):		-20 to +35

Dimensions (mm):	min.	max.
W With (mm):	24.5	26.5
D Depth (mm):	15.5	17.5
H Height (mm):	46.5	48.5

Weight (g):	≤	45.0
Storing temperature (°C):		20±2
Storing Humidity (%):		60±5

Figure:



Drawing:

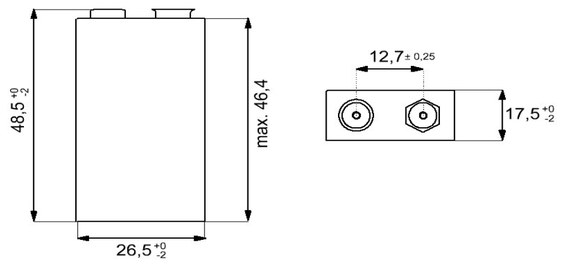

Discharge Characteristics

Discharge test (service life) (Test environment: 20℃±2,45%--75%R.H)

Load	**180Ω**	**270Ω**	**620Ω**
Discharge mode	24h/d	1h/d	2h/day
End voltage	5.4V	5.4V	5.4V
Initial	15h	22.4h	52h
After 12 months storage	14h	21.0h	50h

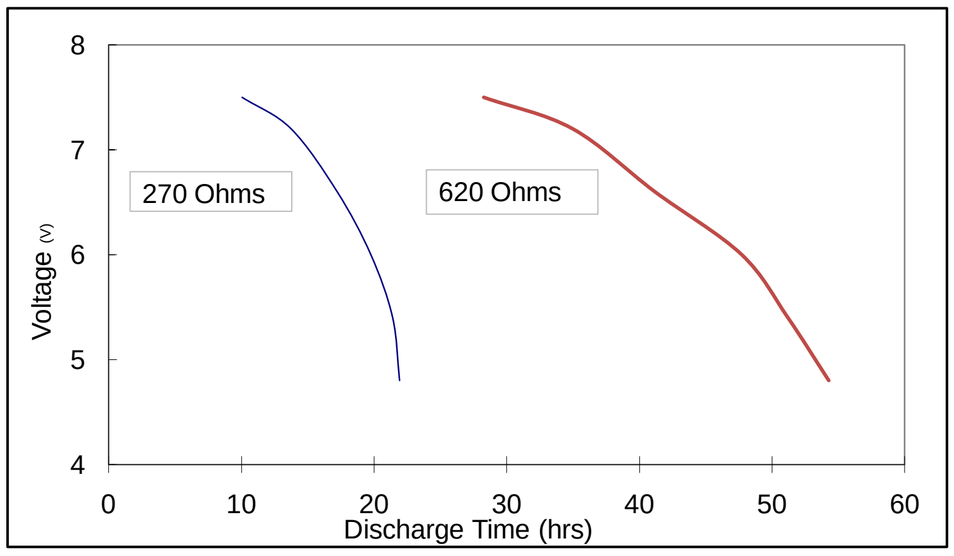

Test environment:20℃±2,60%±15%R.H, Load resistance: 180 ohms, Measure time: 0.3s

	OCV (V)	**CCV (V)**	**SCC (A)**
Initial	≥9.5	≥9.3	≥4
After 12 months storage	≥9.4	≥9.2	≥3

Remark: OCV: Open Circuit Voltage; CCV: Close Circuit Voltage; SCC: Short Circuit Current

Heavy Metal content (%):

Material	**Mercury**	**Cadmium**	**Lead**
Content	≤1ppm	≤10ppm	≤40ppm

Safety Instructions

- ► Keep batteries safely away from children!
- ► Do not charge, short-cicuit, stab, deform, or otherwise damage batteries!
- ► Do not heat up batteries or expose them to fire or temperatures in excess of 85°C!
- ► Never disassemble and do not mix batteries with other battery types!
- ► Never expose batteries to water!
- ► Avoid short-circuiting the battery terminals!
- ► Store batteries in cool and dry ambiences lower than 30°C at a constant temperature.
- ► Avoid placing or storing batteries next to heaters and avoid direct sun light.
- ► There's a risk of bursting if heated up in excess of 100°C or by overcharging them.
- ► According to IATA Regulutions, tecxus™ batteries are not considered dangerous goods.
- ► Remove batteries when not in use for longer periods.
- ► The safety regulation IEC 60086-5 contains additional recommendations for producers and users.

Disposal Instructions

Batteries must not be disposed with household waste. Its components must be recycled or disposed separately from each other. Otherwise contaminative and hazardous substances may pollute the environment.

You as a consumer are committed by law to return batteries to the producer, the dealer, or public collecting points at the end of its lifetime, free of charge. Particulars are regulated according to national right. The symbol on the product, in the user`s manual, or at the packing refers to these regulations. With this kind of waste separation, application, and waste disposal of used batteries an important contribution can be made to environmental protection.

2006/66/EC



Delivered capacity is dependent on the applied load, operating and cut-off voltage. Refering to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

tecxus Europe GmbH
Pillmannstr. 12
38112 Braunschweig
Germany

Phone: + 49 531 12172 0
Fax: + 49 531 12172 29
Internet: www.tecxus.com

Revision Date: TF 10/2011