
M2N


OBUDOWA, BEZ PRZYCISKÓW, DO ROZRUSZNIKÓW ZŁOŻONYCH ZE STYCZNIKÓW BF25A, BF26A, BF32A



Przeznaczenie produktu			Puste obudowy
Seria produktu			M2N
Właściwości elektryczne			
Maksymalny prąd roboczy (≤440 V)		A	32
Komponenty			
W zestawie standardowy stycznik			BF25A, BF26A, BF32A
Możliwość zakupu dodatkowego przekaźnika termicznego			RF38
Właściwości mechaniczne			
Masa		g	640
Warunki otoczenia			
Temperatura pracy			
	min.	°C	-25
	maks.	°C	+60
Temperatura składowania			
	min.	°C	-40
	maks.	°C	+70
Odporność i zabezpieczenie			
Stopień ochrony IP od frontu			IP65
Wymiary [mm (in)]			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

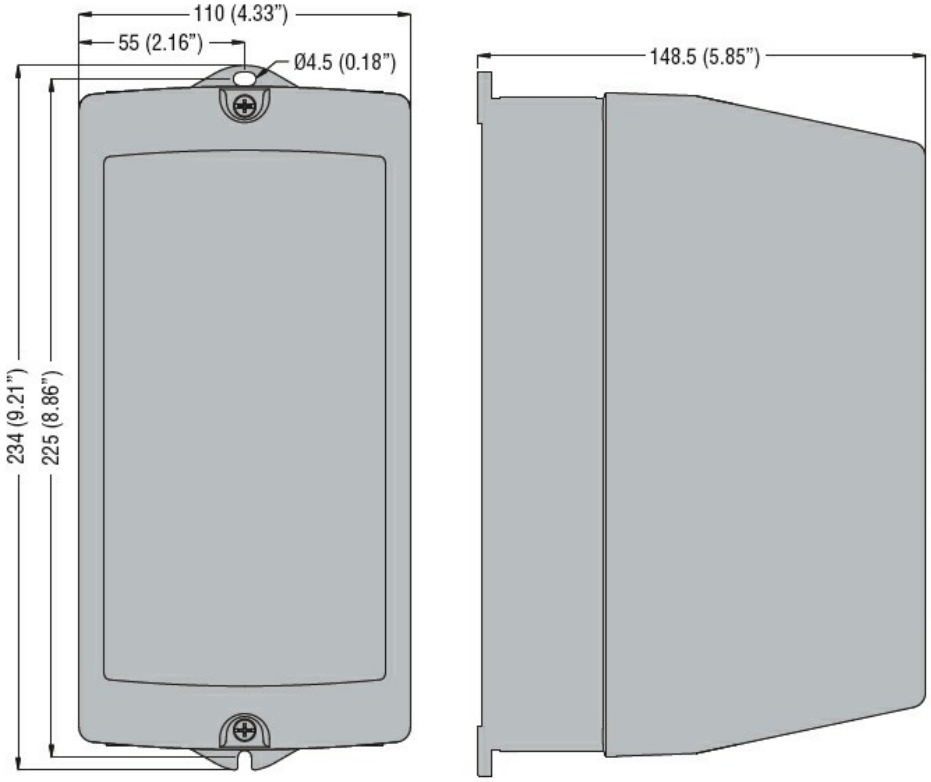

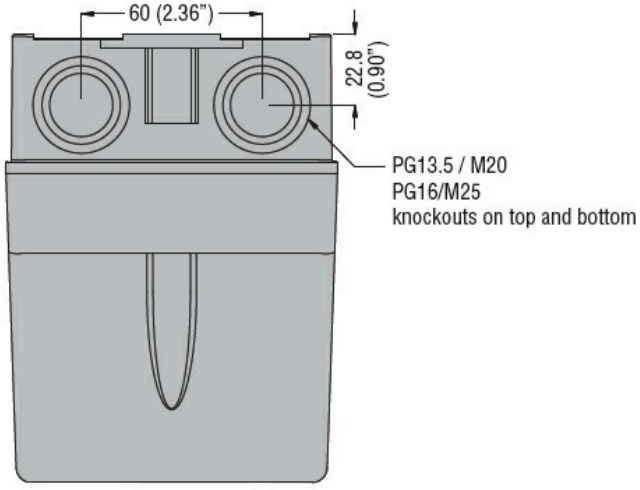

Certyfikaty i zgodność

Zgodność	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508
Certyfikaty	
	cULus

Klasyfikacja ETIM

ETIM 8,0	EC000200 - Obudowa do urządzeń sterowniczych i sygnalizacyjnych

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding