

GIVRO LED-WW 50M



GIVRO LED-CW 50M



GIVRO LED-Y 50M



GIVRO LED-GN 50M



GIVRO LED-BL 50M



GIVRO LED-RE 50M

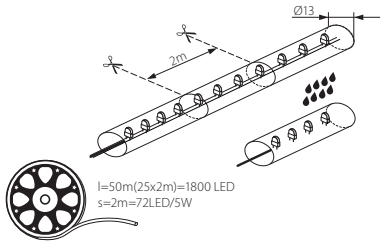

- obudowa: tworzywo sztuczne
- casing: plastic

Kanlux	Kanlux	
GIVRO LED-WW 50M	08642	ciepłobiała / warm white
GIVRO LED-CW 50M	08630	chłodnobiała / cool white
GIVRO LED-Y 50M	08634	żółta / yellow
GIVRO LED-GN 50M	08633	zielona / green
GIVRO LED-BL 50M	08631	niebieska / blue
GIVRO LED-RE 50M	08632	czerwona / red

220-240VDC | [W] 125 | 1800 LED | [h] 50000 | [°] | IP 44 | 1/-/2 | [g] 7622 | CE

wąż o długości 50m / możliwość dzielenia pasków LED na segmenty (2m = 72 x LED) / do prawidłowego działania wymagane jest urządzenie zasilające GIVRO PR SET dostępne w ofercie Kanlux
50m long rope / the possibility to divide the LED strips into segments (2m = 72 x LED) / power cord of GIVRO PR SET, available in Kanlux offer, is needed for proper operation