PUSH WIRE® Connectors for Junction Boxes 273 / 773 / 2273 Series – Description and Handling –

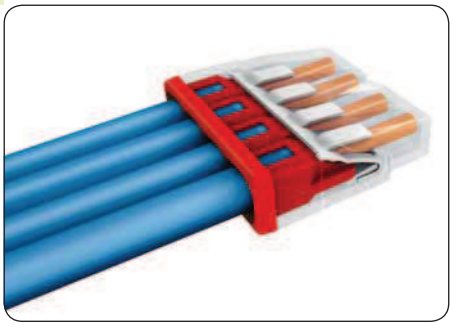

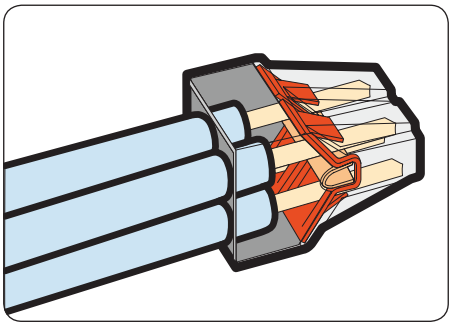

Strip length

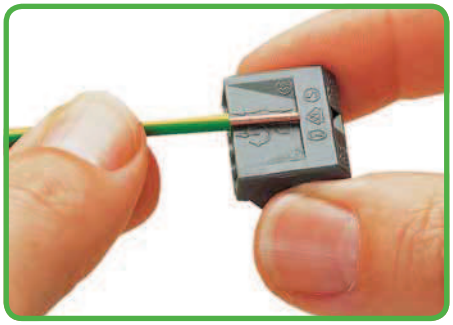

Strip solid conductor to 10 – 13 mm (0.39 – 0.51 in).

Testing



Testing

PUSH WIRE® connection



Termination: Insert stripped solid conductor until it hits backstop.

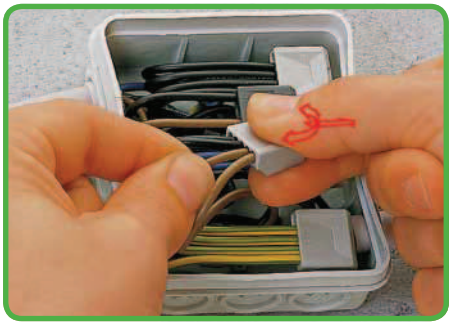

Removal: Hold conductor to be removed and twist alternately left and right while pulling the connector.

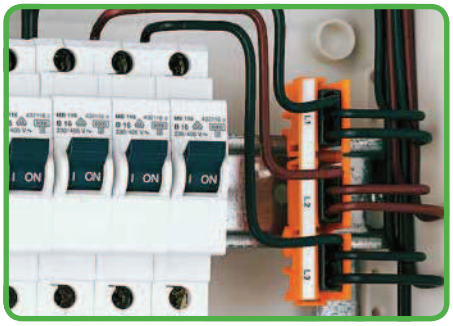

FIXED IN POSITION – on a DIN 35 rail (273 Series mounting carrier)

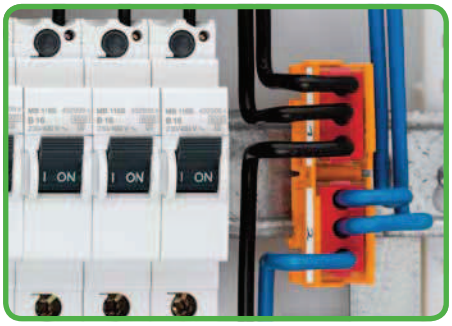

FIXED IN POSITION – on a DIN 35 rail (773 Series mounting carrier)

PUSH WIRE® clamps the following copper conductors:



solid, 273, 773 and 2273 Series



stranded, 773 Series only

Strip length, see packaging or instructions.

PUSH WIRE® Connectors for Junction Boxes, 273 Series

0.75 – 1.5 mm² "sol." ❶	AWG 18 – 16 "sol."
400 V/ 4 kV/ 2**	600 V, 20 A (UL)
I_N 18 A	600 V, 10 A (CSA)
10 – 13 mm / 0.45 in	
❸ Approvals	





Color	Item No.	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes			
3 cond.	● 273-100	○ 273-153	1000

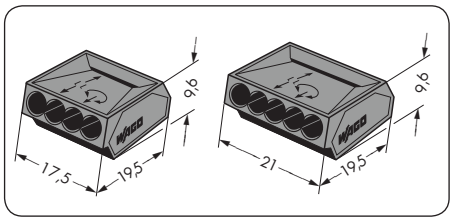

0.75 – 1.5 mm² "sol." ❶	AWG 18 – 16 "sol."
400 V/ 4 kV/ 2**	600 V, 20 A (UL)
I_N 18 A	600 V, 10 A (CSA)
10 – 13 mm / 0.45 in	
❸ Approvals	





Color	Item No.	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes			
5 cond.	● 273-101	○ 273-155	1000
8 cond.	● 273-108	○ 273-158	500

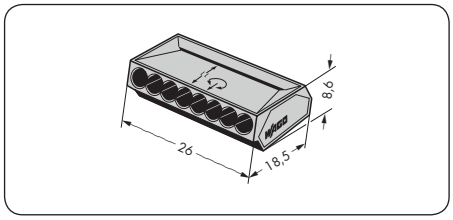

PUSH WIRE® Connectors for Junction Boxes
COMPACT PUSH WIRE® Connectors for Junction Boxes

273 Series

1 – 2.5 mm² "sol." ❶ | AWG 14 – 12 "sol."
400 V/ 4 kV/ 2**
I_N 24 A | 600 V, 20 A UL
600 V, 20 A CSA

10 – 13 mm / 0.45 in

❸ Approvals



Color	Item No.	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes			
2 cond.	**273-112**	**273-252**	1000
3 cond.	**273-104**	**273-253**	1000
4 cond.	**273-102**	**273-254**	1000

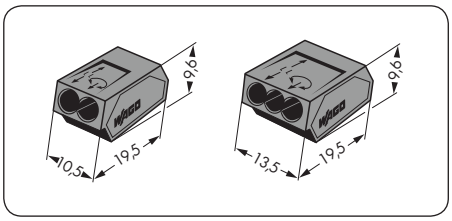

1 – 2.5 mm² "sol." ❶ | AWG 14 – 12 "sol."
AWG 18 – 12 "sol." ❹
400 V/ 4 kV/ 2**
I_N 24 A | 600 V, 20 A UL
600 V, 20 A CSA

10 – 13 mm / 0.45 in
12 mm / 0.47 in ❹

❸ Approvals



Color	Item No.	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes			
5 cond.	**273-105**	**273-255**	1000
8 cond.	**773-108** ❹		500

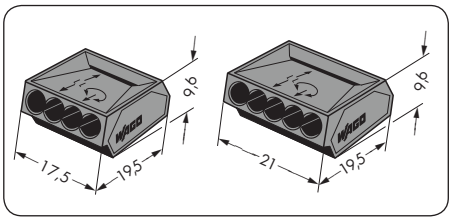

2273 Series

0.5 – 2.5 mm² "sol." ❶ | AWG 18 – 14 "sol."
450 V/ 4 kV/ 2**
I_N 24 A

11 mm / 0.43 in

❸ Approvals



Color	Item No.	Pack. Unit
COMPACT PUSH WIRE® connector for junction boxes, Housing color: transparent		
2 cond. white	**2273-202**	1000 (10x100)
3 cond. orange	**2273-203**	1000 (10x100)
4 cond. red	**2273-204**	1000 (10x100)

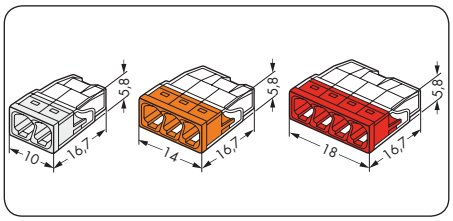

1 – 2.5 mm² "sol." ❶ | AWG 14 – 12 "sol."
AWG 18 – 14 "sol." ❹
450 V/ 4 kV/ 2**
I_N 24 A | 600 V, 20 A UL
600 V, 20 A CSA

11 mm / 0.43 in

❸ Approvals



Color	Item No.	Pack. Unit
COMPACT PUSH WIRE® connector for junction boxes, Housing color: transparent		
5 cond. yellow	**2273-205**	1000 (10x100)
8 cond. light gray	**2273-208**	500 (10x50)

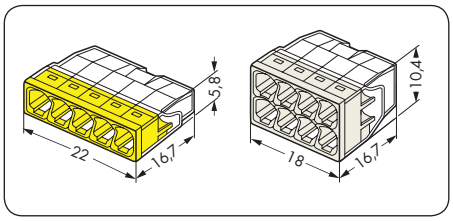

773 Series

2.5 – 6 mm² "s+st"
400 V/ 4 kV/ 2**
I_N 41 A | AWG 14 – 10 "s+st"
600 V, 20 A UL
600 V, 30 A CSA

12 – 13 mm / 0.49 in

❸ Approvals



Color	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes, transparent housing		
3 cond. red	**773-173**	500 (10x50)

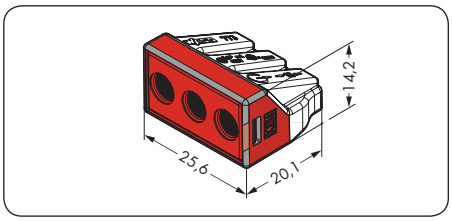

Mounting carrier
for 273 and 773 Series PUSH WIRE® connectors for junction boxes

for 2273 Series COMPACT PUSH WIRE® connectors for junction boxes

273 Series



773 Series



2273 Series



Color	Item No.	Pack. Unit
Mounting carrier		
orange	**273-150**	50 (5x10)
orange	**773-332**	50 (5x10)
orange	**2273-500**	50 (5x10)
Self-adhesive marking strips, plain		
white	**210-334**	1

When using conductors of the same diameter only, ❶ 0.5 mm²/AWG 20 ❷ or 0.75 mm²/AWG 18 are also possible.
❸ Approvals are available online at: www.wago.com.

** In grounded power lines
For technical explanations and abbreviations, see technical section.

WAGO®