SIEMENS

Data sheet 7KM9300-0AM00-0AA0

PLUG-IN COMMUNICATIONS MODULE PAC RS485



Model		
product brand name		SENTRON
Product designation		expansion module PAC RS485
Type of voltage supply		from PAC 3200 / 4200
General technical data		
MTBF	y	222.3
Galvanic isolation		Maximum insulation voltage: 500V AC
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		P
Protection class		
Protection class IP		IP20
Combustibility class acc. to UL 94		V 0
Communication		
Protocol / is supported		SEAbus / MODBUS (switchable)
Transfer rate		
• minimum	kbit/s	4.8
• maximum	kbit/s	38.4
Connections		
Type of electrical connection		screw-type terminals
Mechanical Design		
Height	mm	63
Width	mm	43
Depth	mm	22

Changes preserved
© Copyright Siemens AG

Mounting type		plug-in module for the module slot of the PAC3200 / 4200

Environmental conditions

Degree of pollution		2 according to IEC 61131
Ambient temperature		
• during operation / minimum	°C	-5
• during operation / maximum	°C	55

Certificates

Equipment marking / acc. to DIN EN 61346-2		P

General Product Approval	EMC	Declaration of Conformity	other
EAC	C-TICK	EG-Konf.	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM93000AM000AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/7KM93000AM000AA0/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM93000AM000AA0

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

Changes preserved
© Copyright Siemens AG

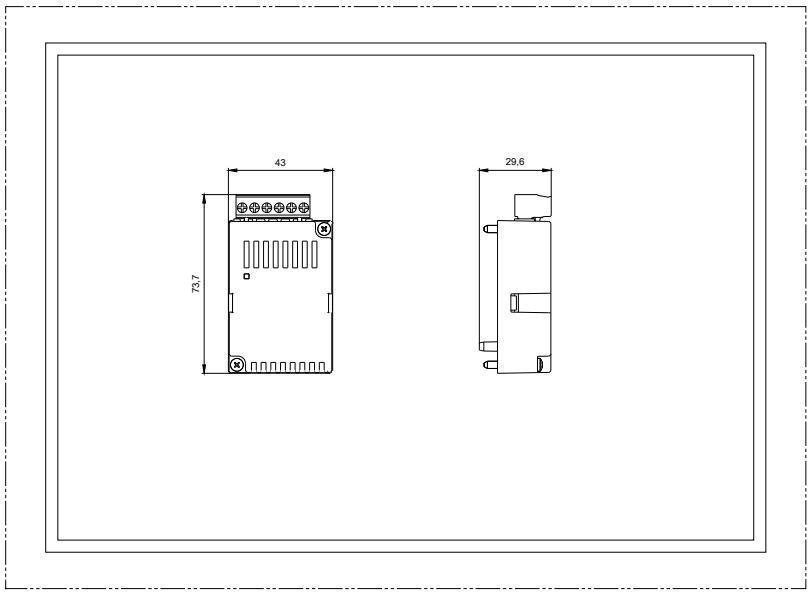

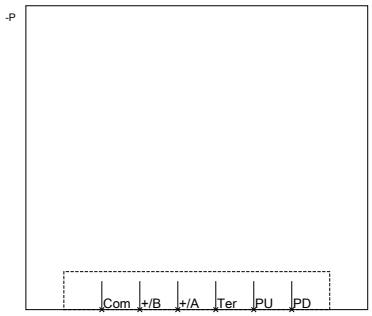

PROFIBUS KOMMUNIKATIONSMODUL

PROFIBUS COMMUNICATIONS MODULE

last modified: 05.05.2015

Changes preserved
© Copyright Siemens AG