
SIEMENS

Data sheet 3UF7932-0AA00-0

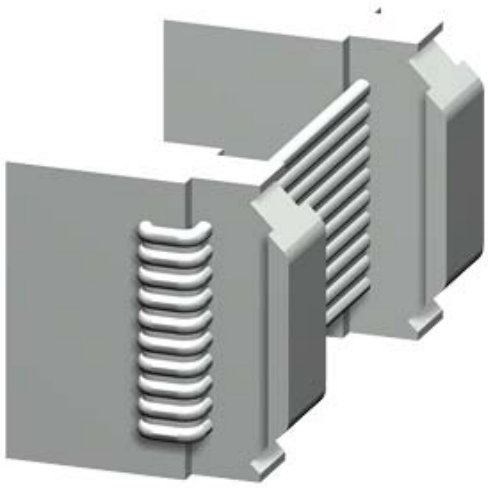

CONNECTION CABLE; LENGTH 0,5M; FLAT; CONNECTION OF BASIC UNIT TO CURRENT MEASURING MODULE, CURRENT/VOLTAGE MEASUR. MODULE, OPERATOR PANEL OR TO EXPANSION MODULES VIA SYSTEM INTERFACE

General technical data:	
product brand name	SIRIUS
Product designation	connecting cable
Design of the product	<kein Wert>
Protection class IP	<kein Wert>
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
• during transport	-40 ... +80 °C
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	<kein Wert>
Equipment marking acc. to DIN EN 61346-2	<kein Wert>

Certificates/ approvals:

Changes preserved
© Copyright Siemens AG

General Product Approval			EMC	Test Certificates	
CCC	EAC	UL	C-TICK	Special Test Certificate	Type Test Certificates/Test Report

Shipping Approval					
ABS	BUREAU VERITAS	DNV	GL	LRS	PRS

other			
Confirmation	Profibus	PROFINET-Certification	PROFISafe-Certification

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system)
http://www.siemens.com/industrymall

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF79320AA000

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3UF79320AA000

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF79320AA000&lang=en

Changes preserved
© Copyright Siemens AG

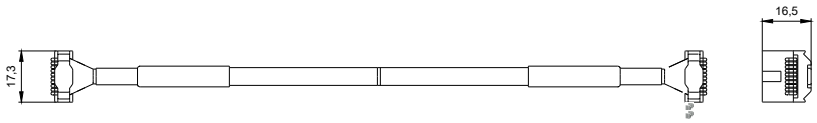

Changes preserved
© Copyright Siemens AG