Terminal Strips with Push-Buttons on Both Sides, Fixing Flanges or Snap-in Mounting Feet 2.5 mm² 261 Series

0.08 - 2.5 mm² | AWG 28 - 14 500 V/6 kV/3 ❶ I_N 24 A Pole width 6 mm / 0.236 in 8 - 9 mm / 0.33 in ❷	0.08 - 2.5 mm² | AWG 28 - 14 500 V/6 kV/3 ❶ I_N 24 A Pole width 10 mm / 0.394 in 8 - 9 mm / 0.33 in ❷


❸


❸

❶ 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Strip length, see packaging or instructions.

❸ Terminal blocks with blue insulation are suitable for Ex i applications
Item no. suffix **. . . /000-006**

❹ For longer strips and/or assemblies of different colors, please contact factory

Pole No.	Item No.	Pack. Unit
2-conductor terminal strip with push-buttons on both sides and with fixing flanges, gray		
2	**261-102/341-000**	100
3	**261-103/341-000**	100
4	**261-104/341-000**	50
5	**261-105/341-000**	100
6	**261-106/341-000**	25
7	**261-107/341-000**	50
8	**261-108/341-000**	50
9	**261-109/341-000**	100
10	**261-110/341-000**	25
11	**261-111/341-000**	25
12 ❹	**261-112/341-000**	25
2-conductor terminal strip with push-buttons on both sides and with snap-in mounting feet, gray		
2	**261-152/341-000**	100
3	**261-153/341-000**	100
4	**261-154/341-000**	50
5	**261-155/341-000**	100
6	**261-156/341-000**	100
7	**261-157/341-000**	50
8	**261-158/341-000**	50
9	**261-159/341-000**	50
10	**261-160/341-000**	25
11	**261-161/341-000**	25
12 ❹	**261-162/341-000**	100

Pole No.	Item No.	Pack. Unit
4-conductor terminal strip with push-buttons on both sides and with fixing flanges, gray		
2	**261-202/342-000**	100
3	**261-203/342-000**	100
4	**261-204/342-000**	100
5	**261-205/342-000**	100
6	**261-206/342-000**	50
7	**261-207/342-000**	50
8	**261-208/342-000**	100
9	**261-209/342-000**	50
10	**261-210/342-000**	25
11	**261-211/342-000**	25
12 ❹	**261-212/342-000**	50
4-conductor terminal strip with push-buttons on both sides and with snap-in mounting feet, gray		
2	**261-252/342-000**	100
3	**261-253/342-000**	100
4	**261-254/342-000**	100
5	**261-255/342-000**	100
6	**261-256/342-000**	50
7	**261-257/342-000**	50
8	**261-258/342-000**	50
9	**261-259/342-000**	50
10	**261-260/342-000**	25
11	**261-261/342-000**	100
12 ❹	**261-262/342-000**	25

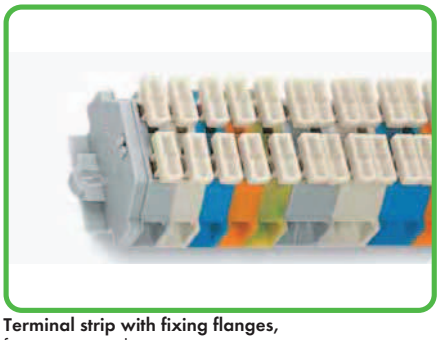

Terminal strip with fixing flanges,
for screw or similar mounting types,
fixing hole 3.2 mm Ø (with 209-123 mounting adapter also for DIN 35 rail)

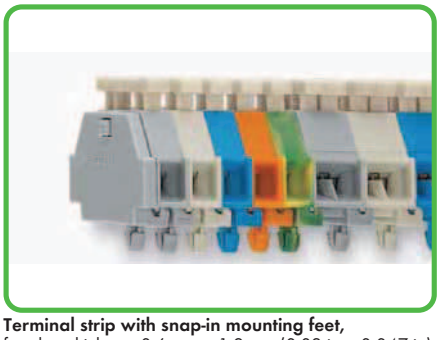

Terminal strip with snap-in mounting feet,
for plate thickness 0.6 mm – 1.2 mm (0.02 in – 0.047 in), fixing hole 3.5 mm Ø (fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail)

Modular terminal blocks and terminal strips with fixing flanges L = No. of poles x pole width L_1 = L + 8.1 mm L_2 = L + 14.5 mm

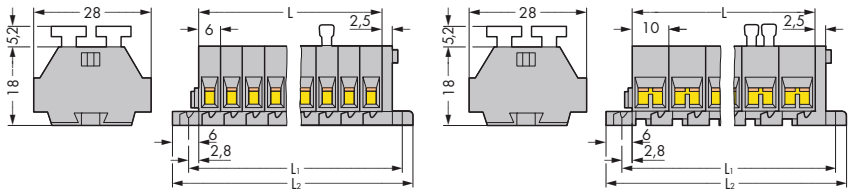

Modular terminal blocks and terminal strips with snap-in mounting feet L = (No. of poles x pole width) + 4.4 mm ● End terminal block

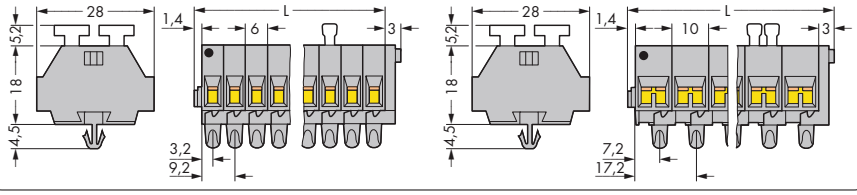

Dimensions in mm

For list of approvals and user guide, see pages 634 to 637.

Modular Terminal Blocks with Fixing Flange 2.5 mm², with Miniature WSB Quick Marker Slot
261 Series

CAGE CLAMP®

0.08 - 2.5 mm²	AWG 28 - 14
500 V/6 kV/3 ❶	300 V, 15 A
I_N 24 A	300 V, 20 A

Terminal block width 6 mm / 0.236 in
8 - 9 mm / 0.33 in ❷

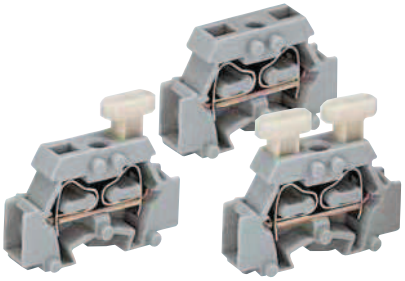

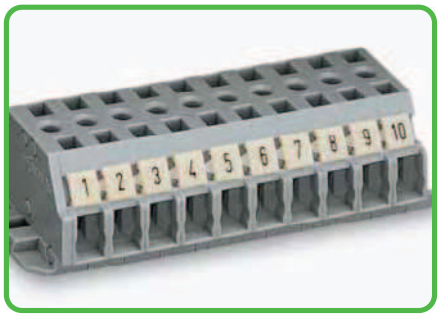

Marking with miniature WSB Quick marking system.

❶ 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Strip length, see packaging or instructions.

Color	Item No.	Pack. Unit
2-conductor terminal block with fixing flange		
gray	**261-411**	200 (4x50)
2-conductor terminal block with push-button on one side and with fixing flange		
gray	**261-411/331-000**	200 (4x50)
2-conductor terminal block with push-buttons on both sides and with fixing flange		
gray	**261-411/341-000**	200 (4x50)

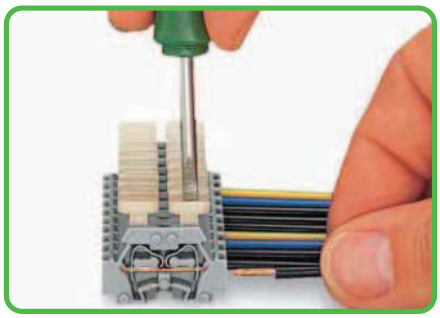
Conductor termination via push-button.

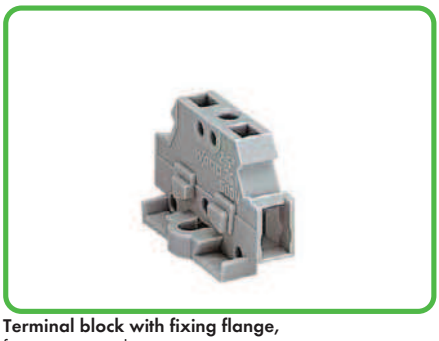

Terminal block with fixing flange,
for screw or similar mounting types,
fixing hole 3.2 mm Ø
(with 209-123 mounting adapter also for DIN 35 rail)
Lateral marking facility for miniature WSB Quick marking system, test slot.

261 Series Accessories

Appropriate marking system:
Miniature WSB (see Section 13)

End plate with fixing flange			
	gray	**261-410**	300 (6x50)
Comb-style jumper bar, insulated, I_N 16 A, gray, reduces maximum conductor size to 1.5 mm²/AWG 16			
	2-way	**261-402**	25
Operating tool, of insulating material, for inserting comb-style jumper bars			
	2-way	**209-132**	1
Mounting foot with screw, for DIN 35 rail, can be screwed on terminal blocks with fixing flange, 6.4 mm wide			
	gray	**209-123**	25
Mounting adapter, for DIN 35 rail, can be used as end plate, 6.5 mm wide			
	gray	**209-137**	25
Test plug, with 500 mm cable, 2 mm Ø			
	red	**210-136**	50
Miniature WSB Quick marking system, 10 strips with 10 markers per card, 5 mm wide markers			
	plain	**248-501**	5
Operating tool with partially insulated shaft, type 2, (3.5 x 0.5) mm blade			
		**210-720**	1

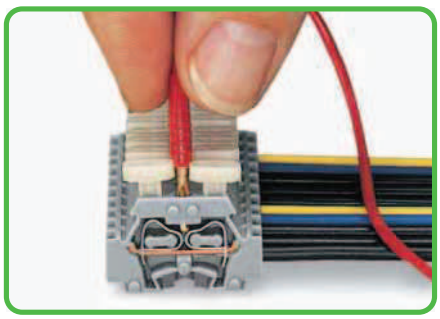
Touch contacting with test plug 2 mm Ø.

For list of approvals and user guide, see pages 634 to 637.

Terminal Strips with Fixing Flanges 2.5 mm², with Miniature WSB Quick Marker Slot
261 Series

0.08 - 2.5 mm²	AWG 28 - 14
500 V/6 kV/3 ❶	300 V, 15 A
I_N 24 A	300 V, 20 A
Pole width 6 mm / 0.236 in	
8 - 9 mm / 0.33 in ❷	

0.08 - 2.5 mm²	AWG 28 - 14
500 V/6 kV/3 ❶	300 V, 15 A
I_N 24 A	300 V, 20 A
Pole width 6 mm / 0.236 in	
8 - 9 mm / 0.33 in ❷	

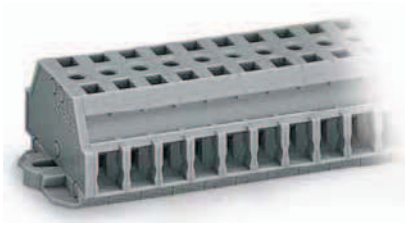

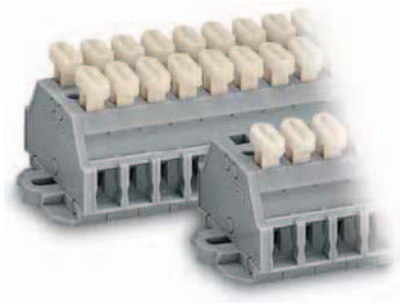

❶ 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Strip length, see packaging or instructions.

❸ For custom lengths, please contact factory

Pole No.	Item No.	Pack. Unit
2-conductor terminal strip with fixing flanges,		
gray		
2	**261-422**	100
3	**261-423**	100
4	**261-424**	100
5	**261-425**	100
6	**261-426**	50
7	**261-427**	50
8	**261-428**	50
9	**261-429**	50
10	**261-430**	25
11	**261-431**	25
12 ❸	**261-432**	25

Pole No.	Item No.	Pack. Unit
2-conductor terminal strip with push-buttons on one side and with fixing flanges,		
gray		
2	**261-422/331-000**	100
3	**261-423/331-000**	100
4	**261-424/331-000**	100
5	**261-425/331-000**	100
6	**261-426/331-000**	50
7	**261-427/331-000**	50
8	**261-428/331-000**	50
9	**261-429/331-000**	50
10	**261-430/331-000**	25
11	**261-431/331-000**	25
12 ❸	**261-432/331-000**	25
2-conductor terminal strip with push-buttons on both sides and with fixing flanges,		
gray		
2	**261-422/341-000**	100
3	**261-423/341-000**	100
4	**261-424/341-000**	100
5	**261-425/341-000**	100
6	**261-426/341-000**	50
7	**261-427/341-000**	50
8	**261-428/341-000**	50
9	**261-429/341-000**	50
10	**261-430/341-000**	25
11	**261-431/341-000**	25
12 ❸	**261-432/341-000**	25

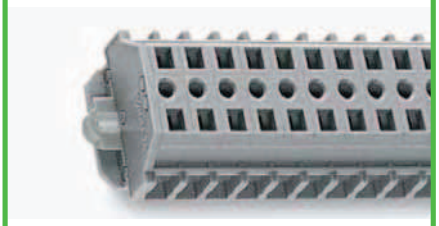

Terminal strip with fixing flanges,
for screw or similar mounting types,
fixing hole 3.2 mm Ø
(with 209-123 mounting adapter also for DIN 35 rail)

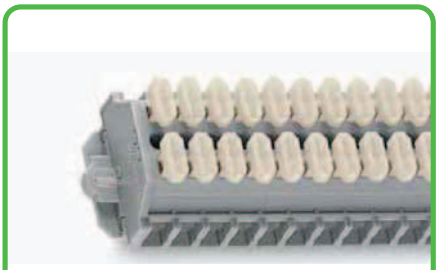

Terminal strip with fixing flanges, with push-buttons on one or both sides of the strip,
for screw or similar mounting types,
fixing hole 3.2 mm Ø (with 209-123 mounting adapter also for DIN 35 rail)

Modular terminal blocks and terminal strips with fixing flanges L = No. of poles x pole width L_1 = L + 7.2 mm L_2 = L + 13.6 mm

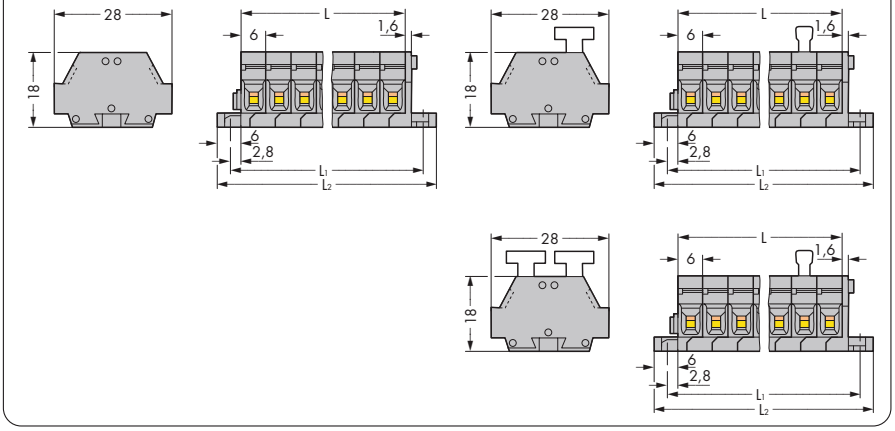

Dimensions in mm

For list of approvals and user guide, see pages 634 to 637.

Modular Terminal Blocks with Fixing Flange or Snap-In Mounting Foot 4 mm²
262 Series

CAGE CLAMP®

0.08 - 4 mm²	AWG 28 - 12
630 V/8 kV/3 ❶	300 V, 20 A
I_N 24 A	300 V, 20 A

Terminal block width 7 mm / 0.276 in
9 - 10 mm / 0.37 in ❷

0.08 - 4 mm²	AWG 28 - 12
630 V/8 kV/3 ❶	300 V, 20 A
I_N 32 A	300 V, 20 A

Terminal block width 12 mm / 0.472 in
9 - 10 mm / 0.37 in ❷





❶ 630 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Strip length, see packaging or instructions.

❸ Suitable for Ex i applications

❹ See application notes for:
Test plug module, page 456

Color	Item No.	Pack. Unit
2-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail		
gray	**262-301**	100 (2x50)
blue	**262-304** ❸	100 (2x50)
orange	**262-306**	100 (2x50)
green-yellow	**262-307**	100 (2x50)
2-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail		
gray	**262-311**	100 (2x50)
blue	**262-314** ❸	100 (2x50)
orange	**262-316**	100 (2x50)
green-yellow	**262-317**	100 (2x50)
2-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet		
gray	**262-321**	100 (2x50)
blue	**262-324** ❸	100 (2x50)
orange	**262-326**	100 (2x50)
green-yellow	**262-327**	100 (2x50)

Color	Item No.	Pack. Unit
4-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail		
gray	**262-331**	100 (2x50)
blue	**262-334** ❸	100 (2x50)
orange	**262-336**	100 (2x50)
green-yellow	**262-337**	100 (2x50)
4-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail		
gray	**262-341**	100 (2x50)
blue	**262-344** ❸	100 (2x50)
orange	**262-346**	100 (2x50)
green-yellow	**262-347**	100 (2x50)
4-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet		
gray	**262-351**	100 (2x50)
blue	**262-354** ❸	100 (2x50)
orange	**262-356**	100 (2x50)
green-yellow	**262-357**	100 (2x50)

Item-Specific Accessories

Test plug module, ❹
can be snapped together, 7 mm wide
gray **249-137** 100 (4x25)

Item-Specific Accessories

Test plug module, ❹
can be snapped together, 12 mm wide
gray **249-140** 100 (4x25)

262 Series Accessories

For marking accessories, see Section 13

End plate with fixing flange
gray **262-361** 50

End plate with snap-in mounting foot
gray **262-371** 50

Comb-style jumper bar, insulated, I_N 16 A, gray, reduces maximum conductor size to 2.5 mm²/AWG 14
2-way **262-402** 25

Operating tool, of insulating material, for inserting comb-style jumper bars
2-way **209-132** 1

Aluminum carrier rail,
1000 mm long, 18 mm wide, 7 mm high
210-154 1

End stop, for WSB Quick markers, for 210-154 aluminum rail, 6 mm wide
209-122 25

Mounting foot, for DIN 35 rail, can be snapped on terminal blocks with snap-in mounting foot, 6.4 mm wide
gray **209-120** 25

Mounting foot with screw, for DIN 35 rail, can be screwed on terminal blocks with fixing flange, 6.4 mm wide
gray **209-123** 25

262 Series Accessories

Marking accessories, see Section 13

Mounting adapter, for DIN 35 rail, can be used as end plate, 6.5 mm wide
gray **209-137** 25

Test plug, with 500 mm cable, 2 mm Ø
red **210-136** 50

Test plug, with 500 mm cable, 2.3 mm Ø
yellow **210-137** 50

Operating tool with partially insulated shaft, type 2, (3.5 x 0.5) mm blade
210-720 1

For list of approvals and user guide, see pages 634 to 637.