0.5 - 2.5 mm²	AWG 20 - 12 *
690 V ❷	300 V, 20 A
I_N 23 A	600 V, 20 A

Pole width 10 mm / 0.394 in
8 - 9 mm / 0.33 in ❸



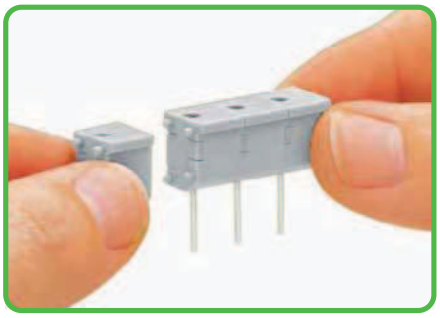

Snapping together individual modules to assemble a multi-pole test plug module.

* AWG 12: THHN, THWN

❶ 800 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Suitable for Ex e II applications
(also see Section 14)

❸ Strip length, see packaging or instructions.

❹ For longer strips and/or assemblies of different colors, please contact factory

Pole No.	Item No.	Pack. Unit
4-conductor Ex e II terminal strip with fixing flanges, for screw or similar mounting types, fixing hole 3.2 mm Ø, light gray		
2	**264-232**	100
3	**264-233**	100
4	**264-234**	100
5	**264-235**	100
6	**264-236**	100
7	**264-237**	100
8	**264-238**	100
9	**264-239**	50
10	**264-240**	50
11	**264-241**	100
12 ❹	**264-242**	25
4-conductor Ex e II terminal strip with snap-in mounting feet, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, light gray		
2	**264-282**	100
3	**264-283**	100
4	**264-284**	100
5	**264-285**	100
6	**264-286**	100
7	**264-287**	50
8	**264-288**	50
9	**264-289**	50
10	**264-290**	25
11	**264-291**	25
12 ❹	**264-292**	25



Item no. suffixes for gray terminal strips with fixing flanges:
264-102 to 264-112
264-202 to 264-212

blue . . . **/000-006**
Terminal blocks with blue insulation are suitable for Ex i applications.



Item no. suffixes for gray terminal strips with snap-in mounting feet:
264-152 to 264-162
264-252 to 264-262

blue . . . **/000-006**
Terminal blocks with blue insulation are suitable for Ex i applications.

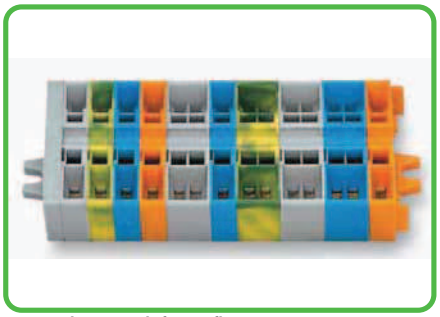

Terminal strip with fixing flanges,
for screw or similar mounting types,
fixing hole 3.2 mm Ø.

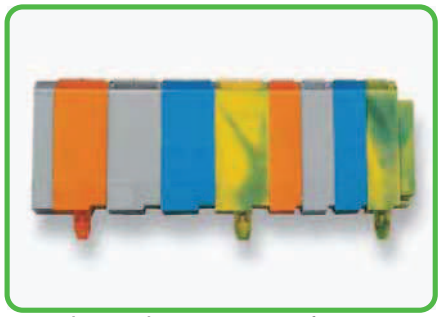

Terminal strip with snap-in mounting feet,
for plate thickness 0.6 mm – 1.2 mm (0.02 in – 0.047 in),
fixing hole 3.5 mm Ø.

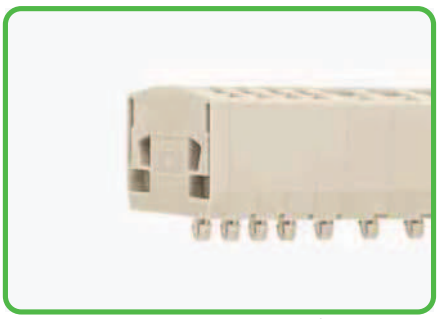

Ex e II terminal strip with snap-in mounting feet

Modular Terminal Blocks and Terminal Strips
260 to 262 Series

Assembly

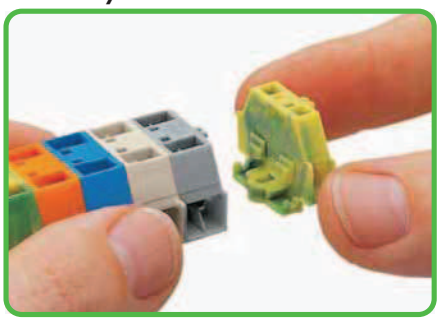

Assembling modular terminal blocks into terminal strips.

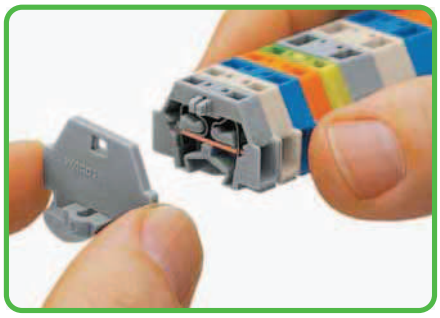

Mounting an end plate.

Fixing

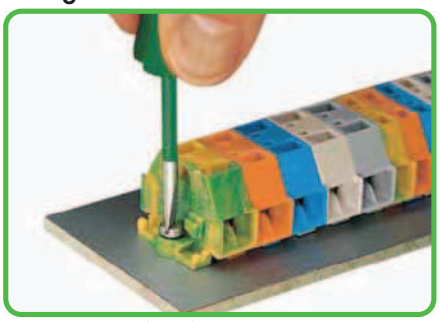

Terminal strip with fixing flanges, screw mount.

CAGE CLAMP® connection

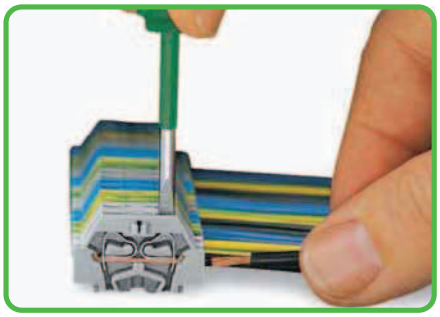

Conductor termination

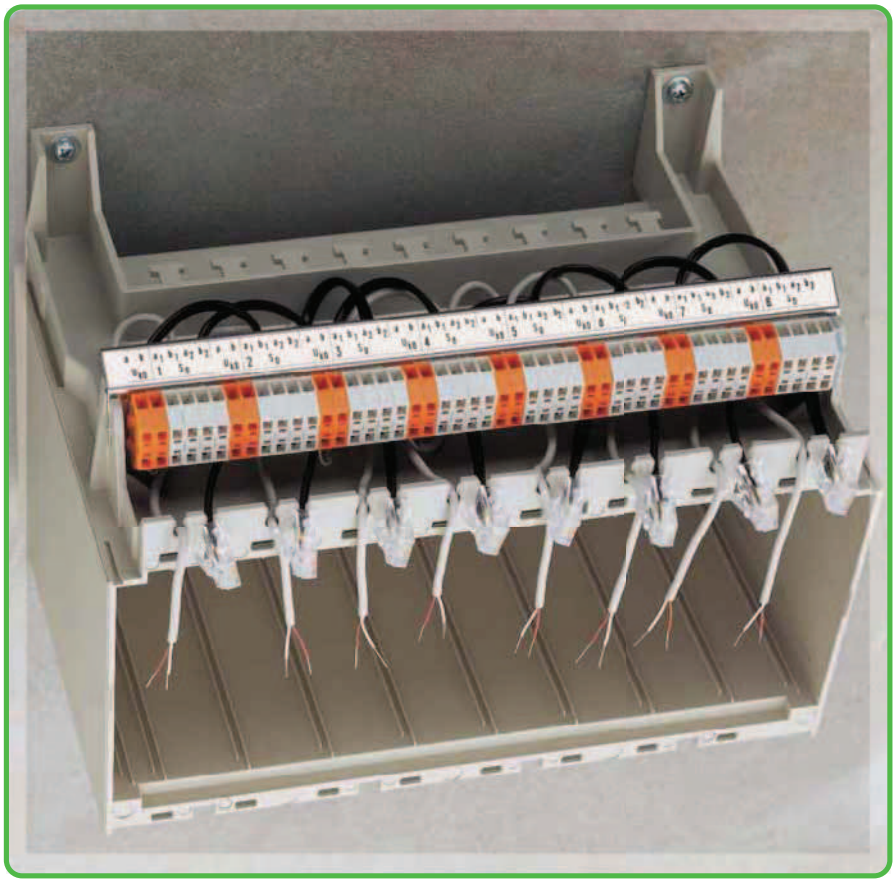

CAGE CLAMP® connection

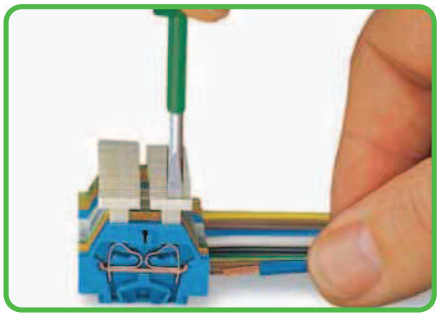

Conductor termination via push-button.

Types

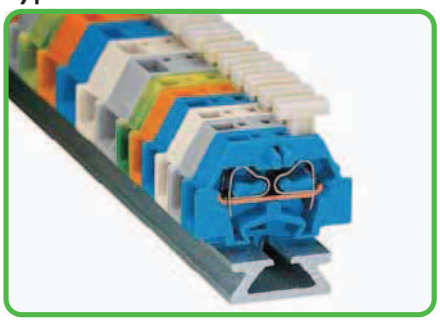

Terminal strip with push-buttons on one side.

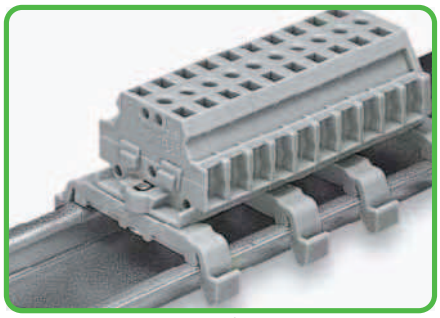

Terminal strip with marker slot for miniature WSB Quick marking system.

Commoning

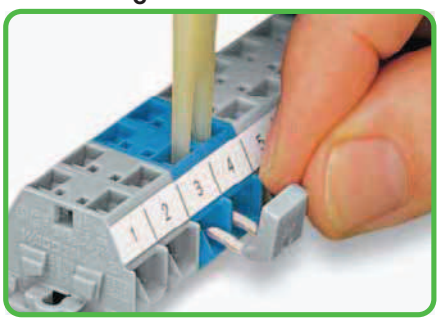

Commoning with comb-style jumper bar.



CAGE CLAMP® clamps the following copper conductors:*

solid



stranded



fine-stranded, also with tinned single strands

* For aluminum conductors, see notes in Section 14.

– Description and Handling –

Fixing

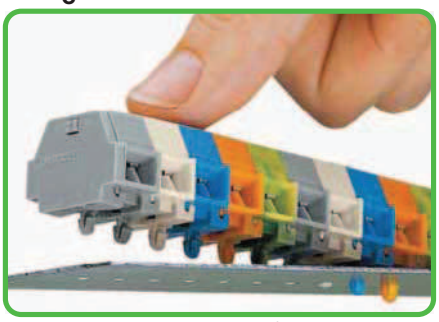

Terminal strip with snap-in mounting feet, mounting in holes.

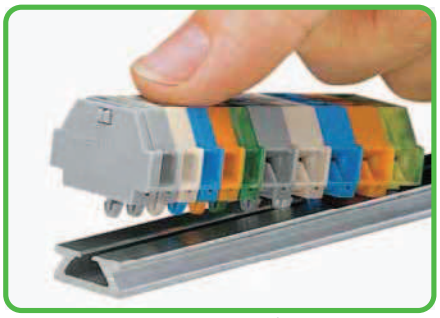

Terminal strip with snap-in mounting feet, mounting onto special aluminum rail.

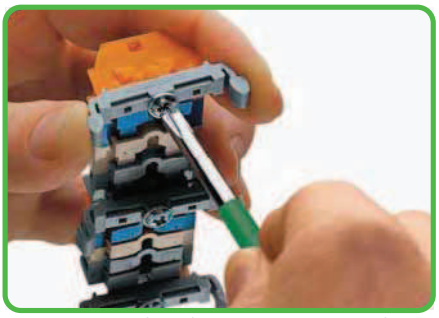

Terminal strip with fixing flanges, screw mounting of 209-123 mounting adapter
(The distance between mounting adapters should be 35 – 40 mm / 1.378 – 1.575 in max.).

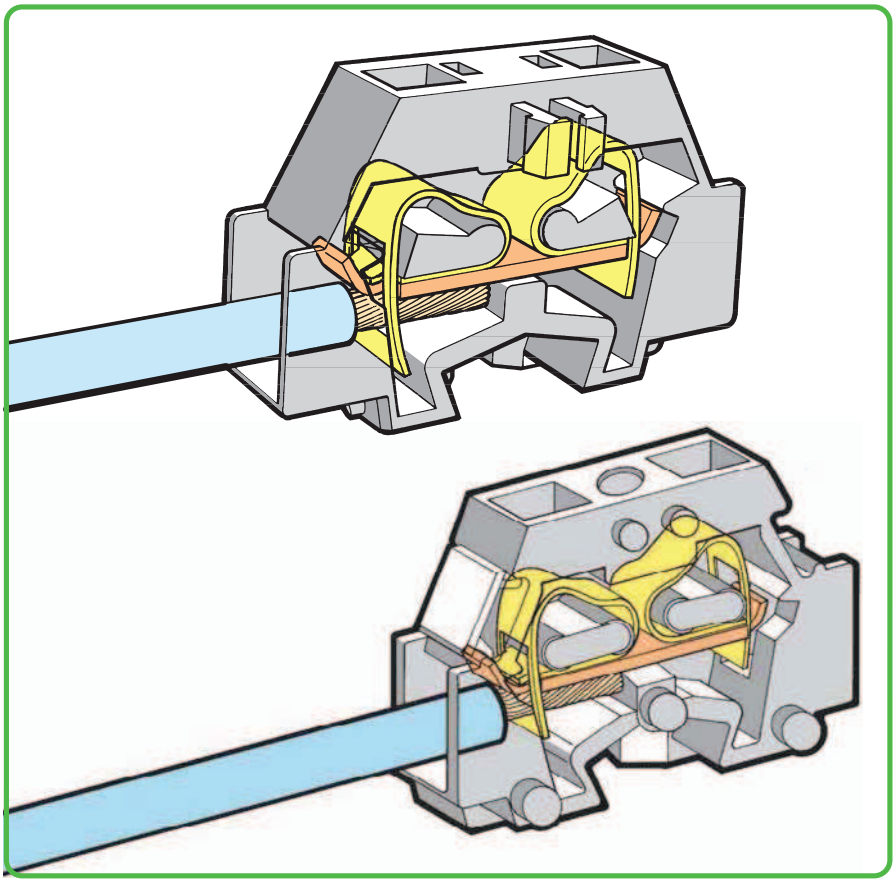

Fixing

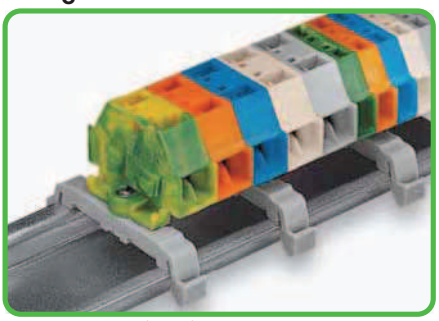

Terminal strip with fixing flanges, on DIN 35 rail.

Fixing



Terminal strip with snap-in mounting feet, connecting to 209-123 mounting adapter
(The distance between mounting adapters should be 35 – 40 mm / 1.378 – 1.575 in max.).

Marking

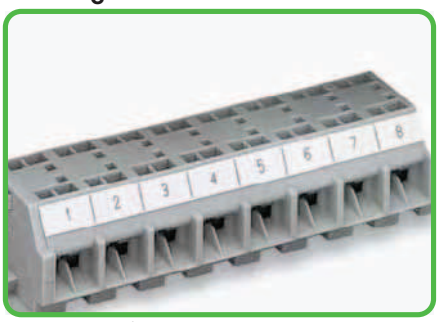

Marking with self-adhesive marker strips.

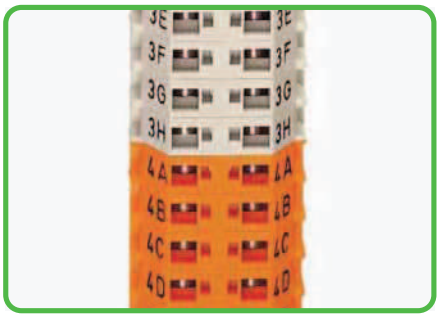

Marking by direct printing (on request).

Fixing

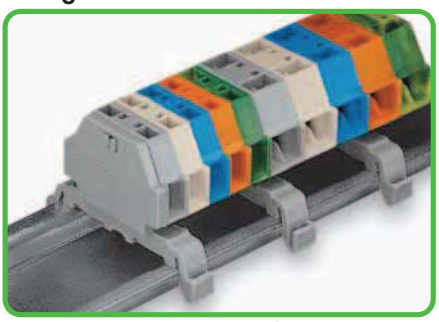

Terminal strip with snap-in mounting feet, on DIN 35 rail.



fine-stranded, tip-bonded



fine-stranded, with ferrule ❶ (gastight crimped)



fine-stranded, with pin terminal (gastight crimped)

❶ When using ferruled conductors, it is necessary to use a terminal block one size larger than the nominal cross section of the wire.

Modular Terminal Blocks with Fixing Flange or Snap-In Mounting Foot 1.5 mm²
260 Series

CAGE CLAMP®

0.08 - 1.5 mm²	AWG 28 - 16
400 V/6 kV/3 ❶	300 V, 10 A
I_N 18 A	300 V, 15 A

Terminal block width 5 mm / 0.197 in
8 - 9 mm / 0.33 in ❷

0.08 - 1.5 mm²	AWG 28 - 16
400 V/6 kV/3 ❶	300 V, 10 A
I_N 18 A	300 V, 15 A

Terminal block width 8 mm / 0.315 in
8 - 9 mm / 0.33 in ❷





❶ 400 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Strip length, see packaging or instructions.

❸ See application notes for:
Test plug module, page 456

Color	Item No.	Pack. Unit
2-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail		
gray	**260-301**	300 (6x50)
light gray	**260-303**	300 (6x50)
blue	**260-304**	300 (6x50)
orange	**260-306**	300 (6x50)
green-yellow	**260-307**	300 (6x50)
2-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail		
gray	**260-311**	300 (6x50)
light gray	**260-313**	300 (6x50)
blue	**260-314**	300 (6x50)
orange	**260-316**	300 (6x50)
green-yellow	**260-317**	300 (6x50)
2-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet		
gray	**260-321**	300 (6x50)
light gray	**260-323**	300 (6x50)
blue	**260-324**	300 (6x50)
orange	**260-326**	300 (6x50)
green-yellow	**260-327**	300 (6x50)

Color	Item No.	Pack. Unit
4-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail		
gray	**260-331**	300 (6x50)
light gray	**260-333**	300 (6x50)
blue	**260-334**	300 (6x50)
orange	**260-336**	300 (6x50)
green-yellow	**260-337**	300 (6x50)
4-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail		
gray	**260-341**	300 (6x50)
light gray	**260-343**	300 (6x50)
blue	**260-344**	300 (6x50)
orange	**260-346**	300 (6x50)
green-yellow	**260-347**	300 (6x50)
4-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet		
gray	**260-351**	300 (6x50)
light gray	**260-353**	300 (6x50)
blue	**260-354**	300 (6x50)
orange	**260-356**	300 (6x50)
green-yellow	**260-357**	300 (6x50)

Item-Specific Accessories

Test plug module, ❸	can be snapped together, 5 mm wide		
	gray	**249-135**	100 (4x25)
Test plug module with locking levers, ❸	can be snapped together, 5 mm wide		
	gray	**260-404**	100 (4x25)

Item-Specific Accessories

Test plug module, ❸	can be snapped together, 8 mm wide		
	gray	**249-138**	100 (4x25)
Test plug module with locking levers, ❸	can be snapped together, 8 mm wide		
	gray	**260-405**	100 (4x25)

260 Series Accessories

For marking accessories, see Section 13

End plate with fixing flange	gray	**260-361**	300 (6x50)
End plate with snap-in mounting foot	gray	**260-371**	300 (6x50)

Comb-style jumper bar, insulated, I_N 10 A, gray, reduces maximum conductor size to 1 mm²/AWG 16	2-way	**260-402**	25
Operating tool, of insulating material, for inserting comb-style jumper bars	2-way	**209-132**	1

260 Series Accessories

Marking accessories, see Section 13

Aluminum carrier rail,	1000 mm long, 18 mm wide, 7 mm high	**210-154**	1
End stop, for WSB Quick markers,	for 210-154 aluminum rail, 6 mm wide	**209-122**	25
Mounting foot, for DIN 35 rail, can be snapped on	terminal blocks with snap-in mounting foot, 6.4 mm wide, gray	**209-120**	25
Mounting foot with screw, for DIN 35 rail, can be	screwed on terminal blocks with fixing flange, 6.4 mm wide, gray	**209-123**	25
Mounting adapter, for DIN 35 rail,	can be used as end plate, 6.5 mm wide, gray	**209-137**	25
Test plug,	with 500 mm cable, 2 mm Ø, red	**210-136**	50
Test plug,	with 500 mm cable, 2.3 mm Ø, yellow	**210-137**	50
Operating tool with partially insulated shaft,	type 2, (3.5 x 0.5) mm blade	**210-720**	1

For list of approvals and user guide, see pages 634 to 637.

Terminal Strips with Fixing Flanges or Snap-in Mounting Feet 1.5 mm² 260 Series

0.08 - 1.5 mm²	AWG 28 - 16
400 V/6 kV/3 ❶	300 V, 10 A
I_N 18 A	300 V, 15 A
Pole width 5 mm / 0.197 in	
8 - 9 mm / 0.33 in ❷	

0.08 - 1.5 mm²	AWG 28 - 16
400 V/6 kV/3 ❶	300 V, 10 A
I_N 18 A	300 V, 15 A
Pole width 8 mm / 0.315 in	
8 - 9 mm / 0.33 in ❷	





❶ 400 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❷ Strip length, see packaging or instructions.

❸ For longer strips and/or assemblies of different colors, please contact factory

Pole No.	Item No.	Pack. Unit
2-conductor terminal strip with fixing flanges, gray		
2	**260-102**	100
3	**260-103**	100
4	**260-104**	100
5	**260-105**	100
6	**260-106**	50
7	**260-107**	50
8	**260-108**	50
9	**260-109**	50
10	**260-110**	25
11	**260-111**	25
12 ❸	**260-112**	25
2-conductor terminal strip with snap-in mounting feet, gray		
2	**260-152**	100
3	**260-153**	100
4	**260-154**	100
5	**260-155**	100
6	**260-156**	50
7	**260-157**	50
8	**260-158**	50
9	**260-159**	50
10	**260-160**	25
11	**260-161**	25
12 ❸	**260-162**	25

Pole No.	Item No.	Pack. Unit
4-conductor terminal strip with fixing flanges, gray		
2	**260-202**	100
3	**260-203**	100
4	**260-204**	100
5	**260-205**	100
6	**260-206**	50
7	**260-207**	50
8	**260-208**	50
9	**260-209**	50
10	**260-210**	25
11	**260-211**	25
12 ❸	**260-212**	25
4-conductor terminal strip with snap-in mounting feet, gray		
2	**260-252**	100
3	**260-253**	100
4	**260-254**	100
5	**260-255**	100
6	**260-256**	50
7	**260-257**	50
8	**260-258**	50
9	**260-259**	50
10	**260-260**	25
11	**260-261**	25
12 ❸	**260-262**	25

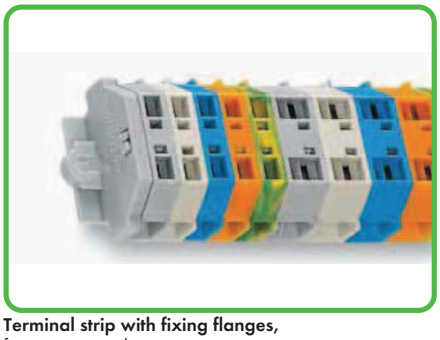

Terminal strip with fixing flanges,
for screw or similar mounting types,
fixing hole 3.2 mm Ø (with 209-123 mounting adapter also for DIN 35 rail)



Terminal strip with snap-in mounting feet,
for plate thickness 0.6 mm – 1.2 mm (0.02 in – 0.047 in), fixing hole 3.5 mm Ø (fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail)

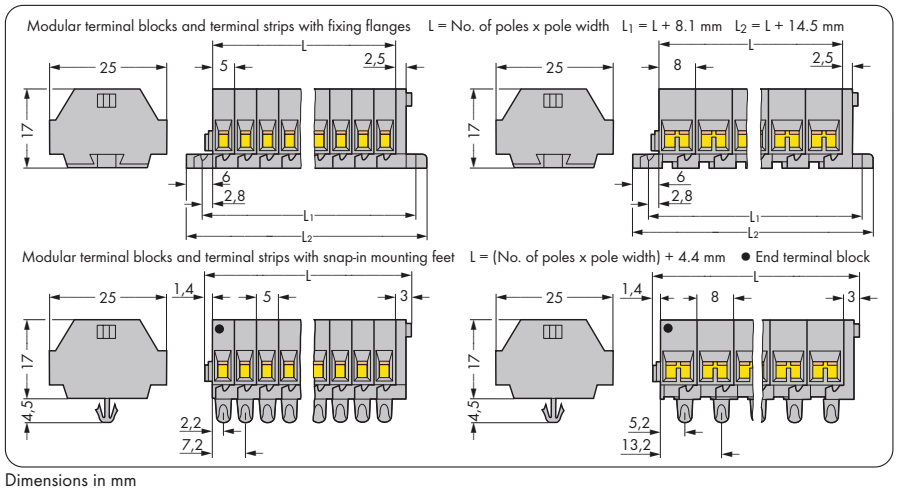

Dimensions in mm

For list of approvals and user guide, see pages 634 to 637.