Karta danych technicznych
Device installation trunking, trunking depth 90 mm

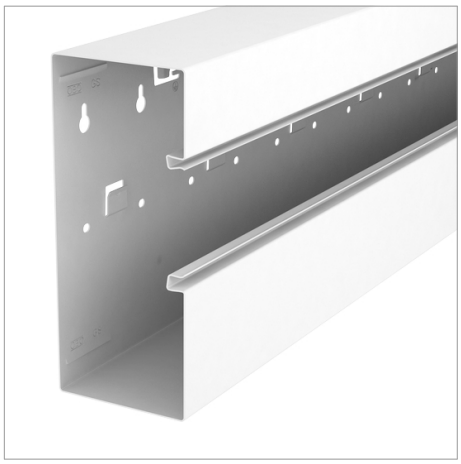

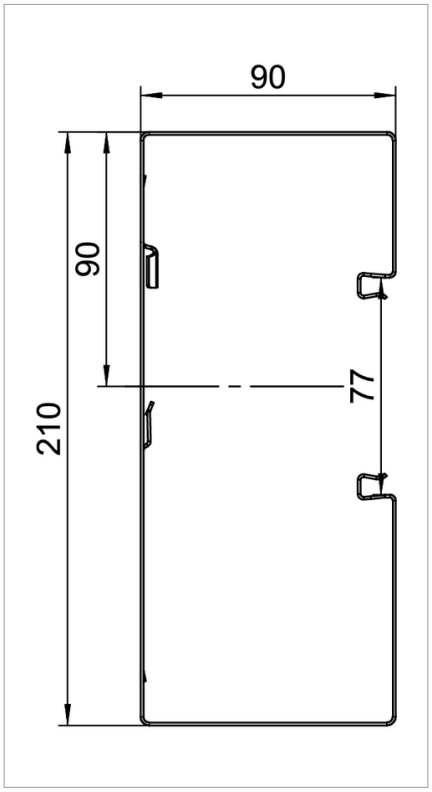

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Laminated painted surface.

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Nr kat.
GS-A90210RW	Pure white; RAL 9010	2000	6	447.000	6278100
GS-A90210CW	Cream; RAL 9001	2000	6	447.000	6278101
GS-A90210LGR	Light grey; RAL 7035	2000	6	447.000	6278102

St Steel /m

Legenda

Communautés Européennes, EC declaration of conformity according to EC directives

Verband der Elektrotechnik, Elektronik, Informationstechnik e.V., Germany