SIEMENS

Data sheet 3KD2830-0NE20-0



SWITCH-DISCONNECTOR 80A, FRAME SIZE 2, 3-POLE FRONT OPERATING CENTER BASIC UNIT WITHOUT HANDLE FLAT TERMINAL INCL. PHASE BARRIERS

Model		
product brand name		SENTRON
Product designation		Switching device
Design of the product		3KD switch disconnectors
Design of the operating mechanism		without
Design of handle		without
Type of the driving mechanism / motor drive		No

General technical data		
Number of poles		3
Type of device		fixed mounting
circuit-breaker / Design		3KD2
Mechanical service life (switching cycles) / typical		15 000
Overvoltage category		III

Voltage		
Insulation voltage / Rated value	V	1 000
Surge voltage resistance / Rated value	kV	8

Protection class		
Protection class IP		IP00
Protection class IP / on the front		IP00

Dissipation		
Active power loss		
• with conventional rated thermal current / per pole	W	2

Changes preserved
© Copyright Siemens AG

Electricity		
Continuous current		
• Rated value	A	80
• at 40 °C / Rated value	A	80
• at 45 °C / Rated value	A	80
• at 50 °C / Rated value	A	80
• at 55 °C / Rated value	A	80
• at 60 °C / Rated value	A	80
• at 65 °C / Rated value	A	80
• at 70 °C / Rated value	A	80
Short-time current resistance (Icw) / limited to 1 s / Rated value	kA	4

Main circuit		
Operating power		
• at AC-23 A / at 400 V / at 50/60 Hz / Rated value	kW	37
• at AC-23 A / at 500 V / at 50/60 Hz / Rated value	kW	55
• at AC-23 A / at 690 V / at 50/60 Hz / Rated value	kW	75
Operating voltage		
• with AC / at 50/60 Hz / Rated value	V	690

Auxiliary circuit		
Number of CO contacts / for auxiliary contacts		4
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0

Suitability		
Suitability for use		
• Main switch		Yes
• switch disconnector		Yes
• EMERGENCY OFF switch		No
• safety switch		Yes
• maintenance/repair switch		Yes

Product details		
Product feature / interlock		No
Product component		
• Trip indicator		No
• Voltage trigger		No
• undervoltage release		No
• undervoltage release with leading contact		No
Product expansion		

Changes preserved
© Copyright Siemens AG

• Auxiliary switch		Yes
• optional		
— motor drive		No
— Voltage trigger		No

Connections

Type of electrical connection		
• for main current circuit		flat connector

Mechanical Design

Height	mm	168
Width	mm	121
Depth	mm	68
mounting position		any
Mounting type		Floor mounting and snap-on mounting to 35 mm standard mounting rail
Mounting type		
• front mounting with 4-hole attachment		No
• front mounting with central attachment		No
• rail mounting		Yes
Net weight	g	830

Environmental conditions

Degree of pollution		3
Ambient temperature		
• during operation / minimum	°C	-25
• during operation / maximum	°C	70
• during storage / minimum	°C	-50
• during storage / maximum	°C	80

Certificates

Equipment marking / acc. to DIN EN 61346-2		Q

General Product Approval			Declaration of Conformity
GOST	VDE		EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3KD28300NE200


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/3KD28300NE200/all


Changes preserved
© Copyright Siemens AG

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD28300NE200

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

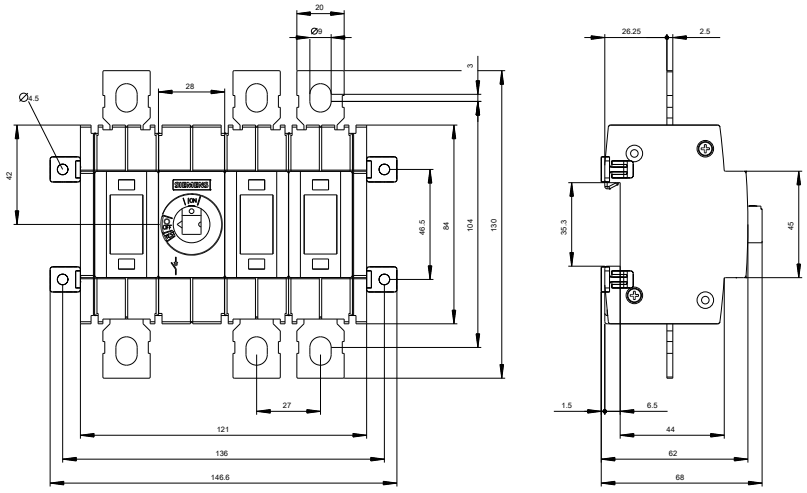

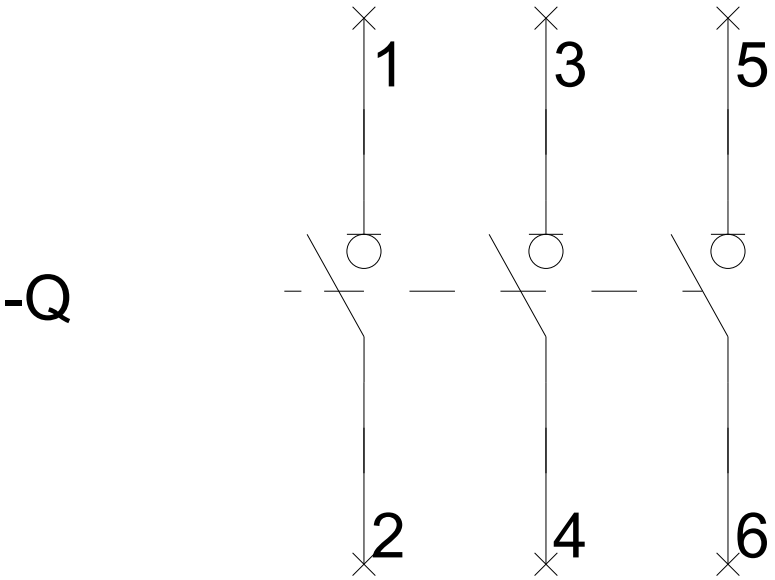

Changes preserved
© Copyright Siemens AG

last modified:	05.05.2015

Changes preserved
© Copyright Siemens AG