SIEMENS

Data sheet 3RK1901-1NN10

AS-INTERFACE DISTRIB. COMPACT FOR CREATING NETWORK STRUCTURES BRANCHES, DISCONNECTION, IP 67/68/69K, MAX. 8A



Figure similar

General technical data:		
Type of device		AS-Interface accessories
Design of the product		AS-i compact distribution boards
Function		distribution function for AS-i flat cables
operating voltage according to AS-Interface spezification	V	26.5 ... 31.6
Note		cable must not end in the distribution board
Note 1		cable must not end in the distribution board
Connections/ Terminals:		
connection		insulation piercing method for AS-Interface flat cable
Connection system		insulation piercing method for AS-Interface flat cable
Mechanical data:		
Type of mounting		screw fixing
Contacts Load rating max	A	8
Ambient conditions:		
ambient temperature	°C	-25 ... +75
ambient temperature when stored	°C	-25 ... +85
degree of protection		IP67/68/69K
Certificates/ approvals:		

Changes preserved
© Copyright Siemens AG

General Product Approval				Shipping Approval	
CSA	GOST	UL		ABS	DNV

Shipping Approval		other		
PRS	RMRS	Confirmation	Environmental Confirmations	Declaration of Conformity

Further information


Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrymall

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK19011NN10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RK19011NN10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK19011NN10&lang=en

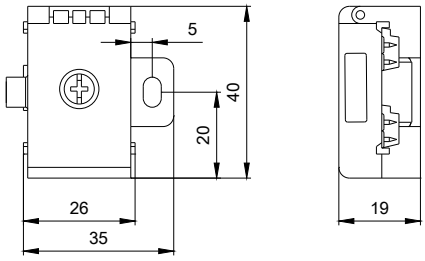

last modified: 05.05.2015

Changes preserved
© Copyright Siemens AG