SIEMENS

Data sheet 3RT1054-1AP36



Figure similar

CONTACTOR, 55KW/400V/AC-3 AC(40...60HZ)/DC OPERATION UC 220...240V AUXIL. CONTACTS 2NO+2NC 3-POLE, SIZE S6 WITH BOX TERMINALS CONVENTIONAL OPERATING MECHAN. SCREW TERMINAL

product brand name	SIRIUS
Product designation	power contactor

General technical data:	
Size of contactor	S6
Insulation voltage	
• Rated value	1 000 V
Surge voltage resistance Rated value	8 kV
Protection class IP	
• on the front	IP00
• of the terminal	IP00
Degree of pollution	3
Mechanical service life (switching cycles)	
• of the contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000

Ambient conditions:	
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Main circuit:	
Number of NO contacts for main contacts	3

Changes preserved
© Copyright Siemens AG

Number of NC contacts for main contacts	0
Operating current	
• at AC-1 at 400 V	
— at ambient temperature 40 °C Rated value	160 A
• at AC-1 up to 690 V	
— at ambient temperature 40 °C Rated value	160 A
— at ambient temperature 60 °C Rated value	140 A
• at AC-3	
— at 400 V Rated value	115 A
— at 690 V Rated value	115 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	50 mm²
• at 40 °C minimum permissible	70 mm²
Operating current for ≥ 200000 operating cycles at AC-4	
• at 400 V Rated value	54 A
• at 690 V Rated value	48 A
Operating current	
• with 1 current path at DC-1	
— at 24 V Rated value	160 A
— at 110 V Rated value	18 A
• with 2 current paths in series at DC-1	
— at 24 V Rated value	160 A
— at 110 V Rated value	160 A
• with 3 current paths in series at DC-1	
— at 24 V Rated value	160 A
— at 110 V Rated value	160 A
Operating current	
• with 1 current path at DC-3 at DC-5	
— at 24 V Rated value	160 A
— at 110 V Rated value	2.5 A
• with 2 current paths in series at DC-3 at DC-5	
— at 110 V Rated value	160 A
— at 24 V Rated value	160 A
• with 3 current paths in series at DC-3 at DC-5	
— at 110 V Rated value	160 A
— at 24 V Rated value	160 A
Operating power	
• at AC-1	
— at 230 V at 60 °C Rated value	53 kW
— at 400 V Rated value	92 kW

Changes preserved
© Copyright Siemens AG

— at 690 V Rated value	159 kW
— at 690 V at 60 °C Rated value	159 kW
• at AC-2 at 400 V Rated value	84 kW
• at AC-3	
— at 230 V Rated value	37 kW
— at 400 V Rated value	64 kW
— at 500 V Rated value	81 kW
— at 690 V Rated value	113 kW
Operating power for ≥ 200000 operating cycles at AC-4	
• at 400 V Rated value	29 kW
• at 690 V Rated value	48 kW
Thermal short-time current restricted to 10 s	1 100 A
Active power loss at AC-3 at 400 V for rated value of the operating current per conductor	7 W
No-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
Operating frequency	
• at AC-1 maximum	800 1/h
• at AC-2 maximum	400 1/h
• at AC-3 maximum	1 000 1/h
• at AC-4 maximum	130 1/h

Control circuit/ Control:	
Type of voltage of the control supply voltage	AC/DC
Control supply voltage at AC	
• at 50 Hz Rated value	220 ... 240 V
• at 60 Hz Rated value	220 ... 240 V
Control supply voltage at DC	
• Rated value	220 ... 240 V
• Rated value	40 Hz
Control supply voltage frequency 2 Rated value	60 Hz
Operating range factor control supply voltage rated value of the magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
Operating range factor control supply voltage rated value of the magnet coil at DC	0.8 ... 1.1
Design of the surge suppressor	with varistor
Apparent pick-up power of the magnet coil at AC	300 V·A
Inductive power factor with closing power of the coil	0.9
Apparent holding power of the magnet coil at AC	5.8 V·A

Changes preserved
© Copyright Siemens AG

Inductive power factor with the holding power of the coil	0.8
Closing power of the magnet coil at DC	360 W
Holding power of the magnet coil for DC	5.2 W
Closing delay	
• at AC	20 ... 95 ms
• at DC	20 ... 95 ms
Arcing time	10 ... 15 ms

Auxiliary circuit:	
Number of NC contacts	
• for auxiliary contacts	
— instantaneous contact	2
Number of NO contacts	
• for auxiliary contacts	
— instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V Rated value	6 A
• at 400 V Rated value	3 A
Operating current at DC-12	
• at 60 V Rated value	6 A
• at 110 V Rated value	3 A
• at 220 V Rated value	1 A
Operating current at DC-13	
• at 24 V Rated value	10 A
• at 60 V Rated value	2 A
• at 110 V Rated value	1 A
• at 220 V Rated value	0.3 A

UL/CSA ratings:	
Contact rating of the auxiliary contacts acc. to UL	A600 / Q600

Short-circuit:	
Design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of assignment 1 required	fuse gL/gG: 355 A
— with type of assignment 2 required	fuse gL/gG: 315 A
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

Installation/ mounting/ dimensions:	
Mounting type	screw fixing
• Side-by-side mounting	Yes
Height	172 mm

Changes preserved
© Copyright Siemens AG

Width	120 mm
Depth	170 mm
Required spacing	
• for grounded parts	
— at the side	10 mm

Connections/ Terminals:

Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-section	
• for main contacts	
— stranded	max. 2x 70 mm²
— finely stranded with core end processing	max. 1x 50, 1x 70 mm²
— finely stranded without core end processing	max. 1x 50, 1x 70 mm²
• for AWG conductors for main contacts	2x 1/0
Type of connectable conductor cross-section	
• for auxiliary contacts	
— solid	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
• for AWG conductors for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/ approvals:

Changes preserved
© Copyright Siemens AG

General Product Approval				Functional Safety/Safety of Machinery	Declaration of Conformity
CCC	CSA	UL	EAC	Baumusterbescheinigung	EG-Konf.

Test Certificates		Shipping Approval			
Typprüfbescheinigung/Werkszeugnis	spezielle Prüfbescheinigungen	ABS	DNV	GL	RMRS

other		
Bestätigungen	Umweltbestätigung	sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrymall

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT10541AP36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT10541AP36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT10541AP36&lang=en

Changes preserved
© Copyright Siemens AG

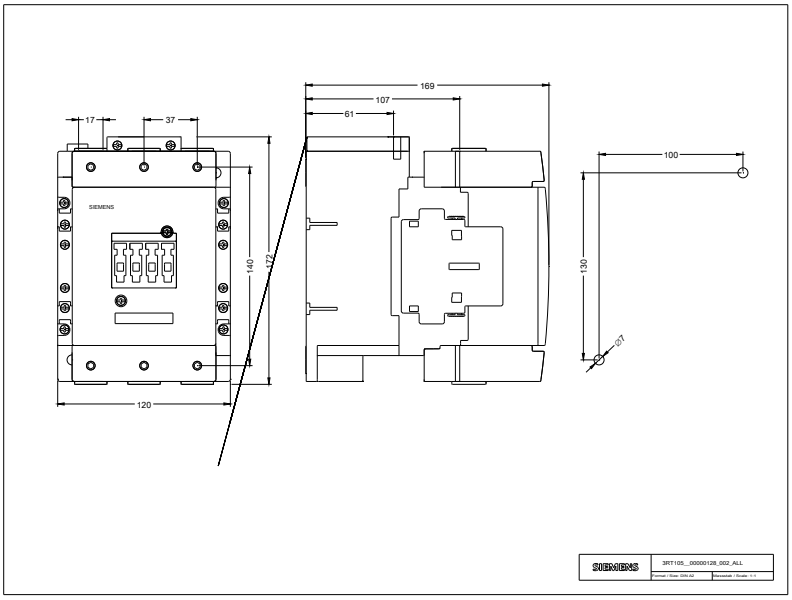

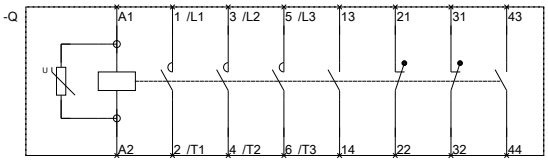

3RT106.-A..6_01_4_IEC.DXF
3RT107.-A..6_01_4_IEC.DXF

last modified: 29.06.2015

Changes preserved
© Copyright Siemens AG