TOPJOB®S
Disconnect and Ground Conductor Disconnect Terminal Blocks
6 (10) mm² / 30 A and Through Terminal Blocks of Same Profile, 2006 Series

0.5 - 6 (10) mm² ❶ | AWG 20 - 8 **800 V/8 kV/3 ❷** **I_N 30 A** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❸**	**0.5 - 6 (10) mm² ❶ | AWG 20 - 8** **800 V/8 kV/3 ❷** **I_N 30 A** **Terminal block width 7.5 mm / 0.295 in** **13 - 15 mm / 0.55 in ❸**	**0.5 - 6 (10) mm² ❶ | AWG 20 - 8** **Terminal block width 15 mm / 0.591 in** **13 - 15 mm / 0.55 in ❸**

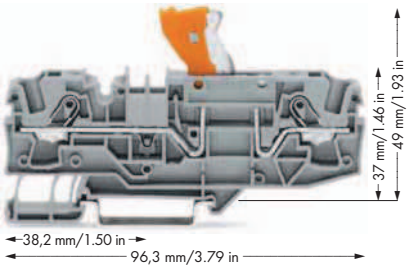

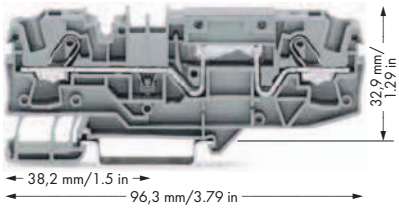

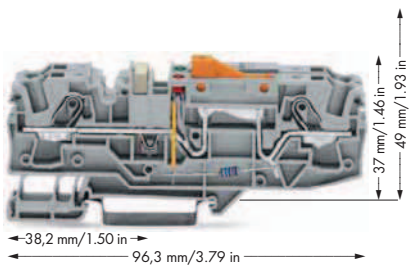

	Item No.	Pack. Unit
2-conductor disconnect terminal block,		
with test point,		
orange disconnect link		
gray	**2006-1671**	25
blue	**2006-1674**	25
Other terminal blocks with the same profile:		
Through	**2006-1601** Page 108	

	Item No.	Pack. Unit
2-conductor through terminal block,		
with test point,		
same profile as 2-conductor disconnect terminal block		
gray	**2006-1601**	25
blue	**2006-1604**	25
Other terminal blocks with the same profile:		
Carrier	**2006-1661** Page 116	
Fuse	**2006-1681** Page 111	

	Item No.	Pack. Unit
Ground conductor disconnect terminal block,		
with test point,		
orange disconnect link, gray		
24 V	**2006-1671/1000-848**	12
48 V	**2006-1671/1000-849**	12
120 V	**2006-1671/1000-850**	12
230 V	**2006-1671/1000-851**	12
Other terminal blocks with the same profile:		
Through	**2006-1601**	Page 108

Item-Specific Accessories

Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	2-way	**2006-402**	50 (2x25)
	3-way	**2006-403**	50 (2x25)
	4-way	**2006-404**	50 (2x25)
	5-way	**2006-405**	50 (2x25)
Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	from 1 to 3	**2006-433**	50 (2x25)
	from 1 to 4	**2006-434**	50 (2x25)
	from 1 to 5	**2006-435**	50 (2x25)
Star point jumper, insulated,			
	I_N = I_N terminal block, light gray		
	1-3-5	**2006-405/011-000**	50 (2x25)

Item-Specific Accessories

Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	2-way	**2006-402**	50 (2x25)
	3-way	**2006-403**	50 (2x25)
	4-way	**2006-404**	50 (2x25)
	5-way	**2006-405**	50 (2x25)
Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	from 1 to 3	**2006-433**	50 (2x25)
	from 1 to 4	**2006-434**	50 (2x25)
	from 1 to 5	**2006-435**	50 (2x25)
Star point jumper, insulated,			
	I_N = I_N terminal block, light gray		
	1-3-5	**2006-405/011-000**	50 (2x25)

Item-Specific Accessories

Push-in type jumper bar, insulated,			
	I_N 41 A,		
	light gray		
	2-way	**2006-402**	50 (2x25)

2006 Series Accessories

Appropriate marking systems: WMB/Marking strips
(see Section 13)

End and intermediate plate, 1 mm thick			
	orange	**2006-1692**	100 (4x25)
	gray	**2006-1691**	100 (4x25)
Protective warning marker,			
	with high-voltage symbol, black,		
	for 5 terminal blocks		
	yellow	**2006-115**	100 (4x25)

Double-deck marker carrier,			
	pivoting		
	gray	**2002-121**	50 (2x25)
WMB Multi marking system,			
	10 strips with 10 markers per card,		
	stretchable 5 - 5.2 mm		
	plain	**793-5501**	5
Marking strip, plain,			
	11 mm wide,		
	50 m roll		
	white	**2009-110**	1

Screwless end stop,			
	for DIN 35 rail,		
	6 mm wide		
	gray	**249-116**	100 (4x25)
Screwless end stop,			
	for DIN 35 rail,		
	10 mm wide		
	gray	**249-117**	50 (2x25)

For list of approvals and user guide, see pages 634 to 637.