SIEMENS

Data sheet 3RT2926-1MR00



SURGE SUPPRESSOR, DIODE COMBINATION WITH LED, DC 24 V, FOR MOTOR CONTACTORS SZ S0,

General technical data:		
product brand name		SIRIUS
Product designation		surge suppressor
Size of contactor		S0
Design of the surge suppressor		with diode assemblies
Ambient temperature		
• during storage	°C	-40 ... +80
• during operation	°C	-25 ... +60

Control circuit/ Control:		
Type of voltage of the control supply voltage		DC
Control supply voltage 1		
• for DC		
— Rated value	V	24

Installation/ mounting/ dimensions:		
mounting position		any
Mounting type		clip-on
Width	mm	30
Height	mm	19
Depth	mm	12

Certificates/ approvals:		
Certificate of suitability		CE / UL / CSA / CCC

Changes preserved
© Copyright Siemens AG

General Product Approval		Declaration of Conformity	Test Certificates	Shipping Approval	
EAC	UL	CE EG-Konf.	Special Test Certificate	ABS	BUREAU VERITAS

Shipping Approval					
DNV	GL	LRS	PRS	RINA	RMRS

other		
Confirmation	Environmental Confirmations	VDE

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrymall

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT29261MR00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT29261MR00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT29261MR00&lang=en

Changes preserved
© Copyright Siemens AG

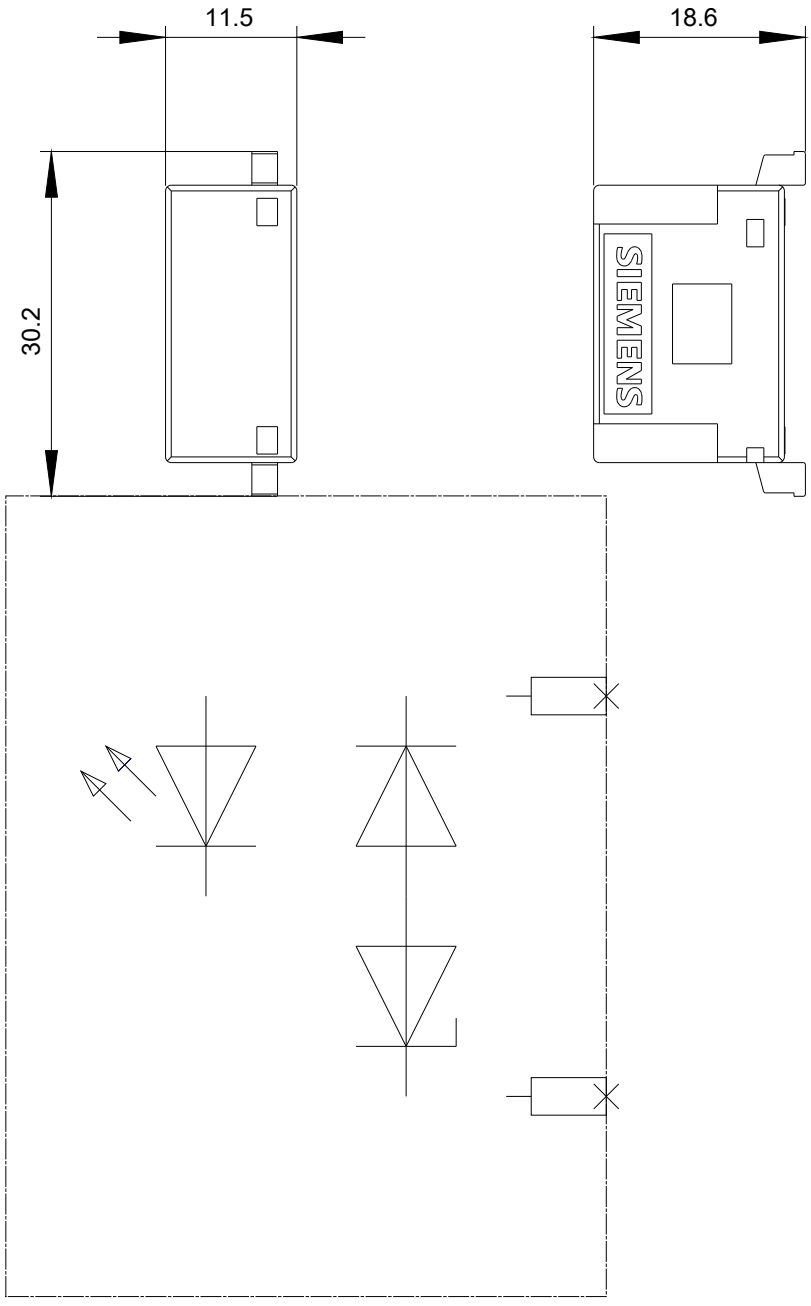

last modified: 27.04.2015

Changes preserved
© Copyright Siemens AG