Atlantic metal cabinets
IP 55/IP 66 - IK 10 - Nema 4x - Nema 12


0 355 23


0 355 37


Plain plates, Lina 12.5 and LIna 25 perforated plates **p. 276**

Cabinet and equipment selection chart **p. 262-263**
Technical characteristics **p. 266**

IP 66 according to standards IEC EN 60529 for 1 doors cabinets
IP 55 according to standards IEC EN 60529 for 2 doors cabinets
IK 10 according to standards IEC EN 62262
LCIE 17 07 90 10A
Nema 4x, 1 door, Nema 12, 2 doors - UL, CSA, Bureau Véritas, TÜV, GÖST agreements
EMC attenuation 20 dB (for an EMC attenuation from 40 to 50 dB at 1 GHz, please consult us)
Excellent resistance to corrosion and chemical agents
80 µm thick textured polyester coating. Anti-corrosion treatment for hinges and axis
Reversible door - One locking point. Locking with key 2433 A (2 keys supplied)
Up to 300 mm height, fitted with latch for height upper than 300 mm, fitted with lever
Low cable entries RAL 7035
Optional depth regulation for cabinets 400 mm depth Cat.No 0 367 45 (p. 265)

Metal cabinets vertical version

Pack	Cat.Nos	External dimensions (mm) Height x Width x Depth	Number of doors	Weight (kg)
1	0 355 09[1]	400 x 300 x 150	1	6.3
1	0 355 00[2]	300 x 200 x 160	1	4.2
1	0 355 02	400 x 300 x 200	1	6.5
1	0 355 03	500 x 400 x 200	1	9.7
1	0 355 04	600 x 400 x 200	1	10.7
1	0 355 07	500 x 400 x 250	1	10.7
1	0 355 08	600 x 400 x 250	1	12
1	0 355 12	700 x 500 x 250	1	16.5
1	0 355 14	800 x 600 x 250	1	18.8
1	0 355 17	1000 x 600 x 250	1	24
1	0 355 18	1000 x 800 x 250	1	36.4
1	0 355 22	700 x 500 x 300	1	23
1	0 355 23	800 x 600 x 300	1	28.8
1	0 355 26	1000 x 600 x 300	1	33.3
1	0 355 27	1000 x 800 x 300	1	42
1	0 355 92	1200 x 800 x 300	1	49.6
1	0 355 93	1200 x 1000 x 300	2	62.2
1	0 355 95	1400 x 1000 x 300	2	71
1	0 355 28	800 x 600 x 400	1	31
1	0 355 29	1000 x 800 x 400	1	45
1	0 355 96	1200 x 800 x 400	1	57
1	0 355 98	1400 x 800 x 400	1	64

Metal cabinets square version

Pack	Cat.Nos	External dimensions (mm) Height x Width x Depth	Number of doors	Weight (kg)
1	0 355 05[1]	300 x 300 x 160	1	4.1
1	0 355 30	300 x 300 x 200	1	4.2
1	0 355 31	400 x 400 x 200	1	7.7
1	0 355 32	500 x 500 x 250	1	11.5
1	0 355 10	600 x 600 x 250	1	16.3
1	0 355 15	800 x 800 x 250	1	21.6
1	0 355 20	600 x 600 x 300	1	21.1
1	0 355 24	800 x 800 x 300	1	34.2
1	0 355 91	1000 x 1000 x 300	2	53
1	0 355 94	1200 x 1200 x 300	2	70
1	0 355 36	600 x 600 x 400	1	28
1	0 355 97	1200 x 1200 x 400	2	77

Metal cabinets horizontal version

Pack	Cat.Nos	External dimensions (mm) Height x Width x Depth	Number of doors	Weight (kg)
1	0 355 01	300 x 400 x 200	1	6.5
1	0 355 06	400 x 600 x 250	1	11.7
1	0 355 33	800 x 1000 x 250	2	27
1	0 355 21	600 x 800 x 300	2	28.8
1	0 355 37	600 x 1000 x 300	2	32
1	0 355 34	800 x 1000 x 300	2	33.3
1	0 355 90	1000 x 1200 x 300	2	62.2

Roofs RAL 7035

Steel
Possible adjustment ± 20 mm (front or back)

Pack	Cat.Nos	For cabinets Width (mm)	Depth (mm)	Weight (kg)
1	0 365 51	300	200	1.2
1	0 365 52	400	200	1.4
1	0 365 53	400	250	1.8
1	0 365 64	500	250	2
1	0 365 54	600	250	2.5
1	0 365 56	600	300	3
1	0 365 57	800	300	3.6

Lighting kit

Pack	Cat.Nos
1	0 363 12

Supplied with 8 W fluorescent tube, Ø16 mm
230 V - 50 Hz
Class I - IP 20 - 600 lumens
Electromagnetic compatibility according to EN 55015
Equipped with a switch
Connection on terminal block
Dim.: 320 x 61 x 32 mm

Door contact (p. 278)

1: With no opening
2: With no opening supplied with plain pates

Red catalogue numbers: New products

equipment for Atlantic metal cabinets





0 355 93 with Cabstop plate Cat.No 0 364 96 and mounting kit Cat.No 0 364 98





0 367 35 with rail Cat.No 0 367 82 (p. 278)



0 329 46



0 329 47



0 347 95



Touch-up brush 0 365 91



0 364 01



0 364 04

Cabinet and equipment selection chart **p. 262-263**
Technical characteristics **p. 266**

Cabstop open-work plate IP 55

Cable entries consisting of a cable clamp providing the mechanical grip, and elastomer areas for weatherproofing
Can be pierced using the cable (no tool required)
Fits the cable perfectly
Replacement of a cable possible
Fire retardant polypropylene RAL 7035
2 possibilities of mounting:
- direct on cable entry of Atlantic, Atlantic-E or Marina cabinets
- on flat surface with kit Cat.No 0 364 98

Supplied with:
- locking caps for sealing a pierced entry providing IP 55 protection
- cable release tool

Pack	Cat.Nos	Number of entries Ø5 to 14	Number of entries Ø14 to 24	Number of spare entries	Direct mounting on cable entry of cabinet width (mm)
1	0 364 94	13	1	-	300
1	0 364 95	13	1	1	400
1	0 364 96	28	2	1	500-1000
1	0 364 97	28	2	2	600-800-1200

Pack	Cat.Nos	
1	0 364 98	Kit for mounting Cabstop plate on plain plate Enables mounting of 2 Cabstop plates: Cat.Nos 0 364 94 or 95 and 0 364 96 or 97 IP 55 maintained

Cable entries for Atlantic cabinets 600 or 800 mm width

Pack	Cat.Nos	
1	0 329 46	IP 43 cable entry plate with brush (cable feed-through 385 x 30 mm)
1	0 329 47	IP 55 multi-entry cable entry plate with cable glands Supplied with 12 ISO 32 cable glands The cable glands take 4 UTP/FTP/SFTP cables (Ø6.5 to 9.5 mm) per cable gland Cords with connectors can be fed through without having to dismantle the cable gland Usable interior Ø25.5 mm Supplied with blanking plates for unused entries

Protective conductor

Earth braid

Pack	Cat.Nos	Capacity (mm²)	Fixing spacing (mm)	Ø of holes (mm)
20	0 347 95	6	200	8.5
20	0 347 96	16	200	8.5
10	0 347 97	30	200	8.5

Green/yellow wire

Pack	Cat.Nos			
20	0 363 95	6	200	6.5

Paint touch-up

Pack	Cat.Nos	
		Aerosol paint spray
1	0 365 97	RAL 7035
		Touch-up brush For protecting the sheet metal after cutting Anti-corrosion paint
10	0 365 91	RAL 7035 Other colours on request

Temporary marking

Pack	Cat.Nos	
10	0 395 99	Water-soluble marker pen


Accessories

Pack	Cat.Nos	
		Set of 4 slides for depth adjustment
1	0 367 45	For 400 mm depth cabinets
		Wall-mounting lugs (set of 4)
1	0 364 01	For load up to 300 kg Horizontal or vertical installation With a roof, horizontal installation only Zamak RAL 7035 Supplied with cover finish
1	0 364 04	For load up to 300 kg Horizontal or vertical installation Anti-corrosion steel treatment
		Attachment lugs for rail ⌙
5	0 367 35	Supplied with M6 screws Set of 2 Used to attach the 15 mm depth symmetric rail ⌙ on door profile strand-holder


■ Usable dimensions

Doors

2 doors

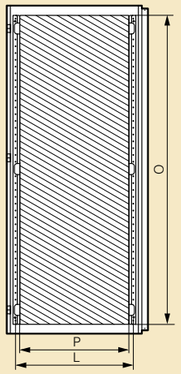


1 door




Cat.Nos	Cabinets		Door usable dimensions		Lock positions	Strand-holder fixing centres
	Height (mm)	Width (mm)	Height O (mm)	Width P (mm)	Q (mm)	L (mm)
0 355 00	300	200	251	148	(1)	(3)
0 355 05/30	300	300	251	248	(1)	(3)
0 355 01	300	400	251	348	(1)	(3)
0 355 02/09	400	300	351	248	(1)	(3)
0 355 31	400	400	351	348	(1)	(3)
0 355 06	400	600	325	500	(1)	530
0 355 03/07	500	400	425	300	(1)	330
0 355 32	500	500	425	400	(1)	430
0 355 04/08	600	400	525	300	350(2)	330
0 355 10/20/36	600	600	525	500	350(1)	530
0 355 21	600	800	525	300 x 2	(1)	330
0 355 37	600	1000	525	400 x 2	(1)	430
0 355 12/22	700	500	625	400	400(2)	430
0 355 14/23/28	800	600	725	500	500(2)	530
0 355 15/24	800	800	725	700	500(2)	730
0 355 33/34	800	1000	725	400 x 2	(1)	430
0 355 17/26	1000	600	925	500	(1)	530
0 355 18/27/29	1000	800	925	700	(1)	730
0 355 91	1000	1000	925	400 x 2	(1)	430
0 355 90	1000	1200	925	500 x 2	(1)	530
0 355 92/96	1200	800	1125	700	(1)	730
0 355 93	1200	1000	1125	400 x 2	(1)	430
0 355 94/97	1200	1200	1125	500 x 2	(1)	530
0 355 98	1400	800	1325	700	(1)	730
0 355 95	1400	1000	1325	400 x 2	(1)	430

1: Central lock
2: Top and bottom lock
3: Without strand-holder

Fixing on door of a symmetrical rail ⌙ depth 15 mm with Cat.No 0 367 35

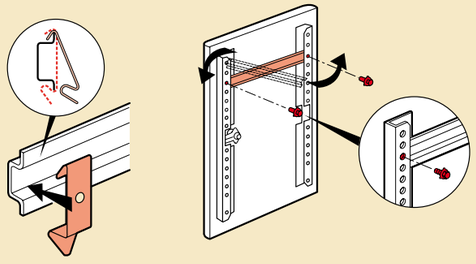


Usable depth



Cabinets	Back of cabinet	
Depth (mm)	W (mm)	X (mm)
160	140	125
200	180	165
250	230	215
300	280	265
400	380	365


Adjustment of equipment (optional) with slides

Cat.No 367 45
For 400 mm depth cabinets




Cable entries

Cabinets width ≤ 800 mm




Cabinets width ≥ 1000 mm




Cabinets (mm)		Dimensions of cable entries (mm)		
Width	Depth	C	M	N
200	160	170	-	-
300	200	210	169	115
400	200	210	269	115
400	250	260	269	115
500	250	260	369	150
500	300	310	369	150
600	250	260	469	150
600	300	310	469	150
600	400	410	469	150
800	250	260	469	150
800	300	310	469	150
800	400	410	469	150
1000	250	260	369	150
1000	300	310	369	150
1200	300	310	469	150
1200	400	410	469	150

■ Usable dimensions


Fixing



Cat.No 0 364 01




Cat.No 0 364 04



Cabinets		Vertical lugs		Mounting centres	Horizontal lugs		Mounting centres	Overall 0 364 01		Overall 0 364 04	
H (mm)	W (mm)	R (mm)	S(1) (mm)	E (mm)	T(1) (mm)	U (mm)	F (mm)	V (mm)	Y (mm)	V (mm)	Y (mm)
300	200	375	150	225	250	275	169	430	330	402	302
300	300	375	250	225	250	375	269	430	430	402	402
300	400	375	350	225	250	475	369	430	530	402	502
400	300	475	250	325	350	375	269	530	430	502	402
400	400	475	350	325	350	475	369	530	530	502	502
400	600	475	550	325	350	675	569	530	730	502	702
500	400	575	350	425	450	475	369	630	530	602	502
500	500	575	450	425	450	575	469	630	630	602	602
600	400	675	350	525	550	475	369	730	530	702	502
600	600	675	550	525	550	675	569	730	730	702	702
600	800	675	750	525	550	875	769	730	930	702	902
600	1000	675	950	525	550	1075	969	730	1130	702	1102
700	500	775	450	625	650	575	469	830	630	802	602
800	600	875	550	725	750	675	569	930	730	902	702
800	800	875	750	725	750	875	769	930	930	902	902
800	1000	875	950	725	750	1075	969	930	1130	902	1102
1000	600	1075	550	925	950	675	569	1130	730	1102	702
1000	800	1075	750	925	950	875	769	1130	930	1102	902
1000	1000	1075	950	925	950	1075	969	1130	1130	1102	1102
1000	1200	1075	1150	925	950	1275	1169	1130	1330	1102	1302
1200	800	1275	750	1125	1150	875	769	1330	930	1302	902
1200	1000	1275	950	1125	1150	1075	969	1330	1130	1302	1102
1200	1200	1275	1150	1125	1150	1275	1169	1330	1330	1302	1302
1400	800	1475	750	1325	1350	875	769	1530	930	1502	902
1400	1000	1475	950	1325	1350	1075	969	1530	1130	1502	1102


1: Same mounting centres for Cat.Nos 0 364 01 and 0 364 04

■ Assembly kit on plane surface for Cabstop plate

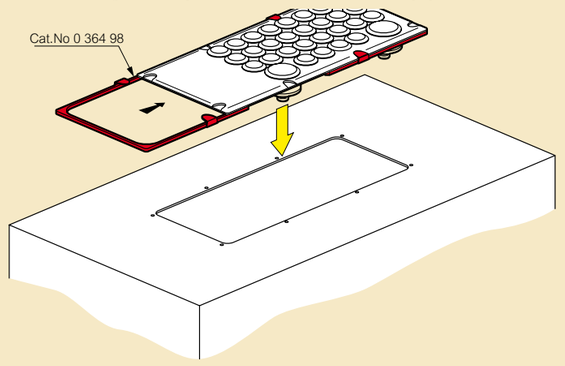


■ Cabstop plate

- Tensile resistance: 15 kg minimum
- Operating temperature: – 20 °C to + 65 °C
- ASTM No 3 resistance to cutting oil
- Resistance to incandescent wire: 750 °C according to IEC EN 60695-2-11

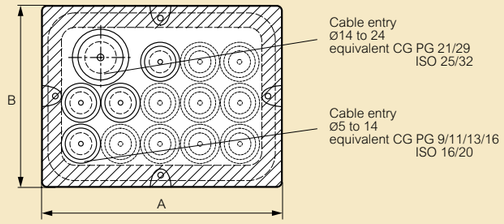


Dimensions


Cat.No 0 364 94




Side view
0 364 94/95




Cat.No 0 364 95




Cat.No 0 364 96

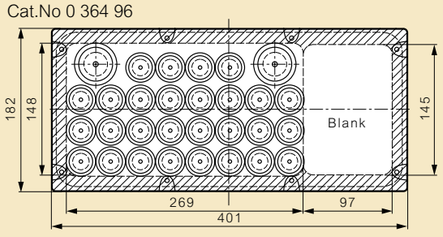

Side view
0 364 96/97




Cat.No 0 364 97

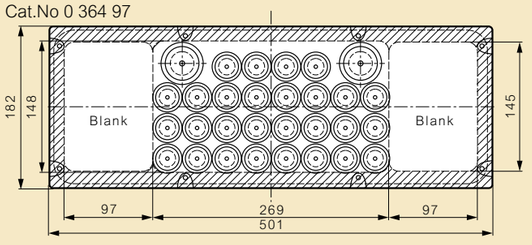

Atlantic, Atlantic-E and Marina cabinets: plain plates and perforated plates



0 360 58



0 360 31



0 360 18



0 355 08 with Lina 12.5 plate
Cat.No 0 360 22
vertical mounting



0 355 06 with Lina 12.5 plate
Cat.No 0 360 22
horizontal mounting

Cabinet and equipement selection chart **p. 262-263**
Technical characteristics **p. 277**

Plain plates

Galvanized steel
Not compatible with Atlantic-E cabinets

Pack	Cat.Nos	Vertical mounting for cabinets Height (mm)	Vertical mounting for cabinets Width (mm)	Weight (kg)	Horizontal mounting for cabinets Height (mm)	Horizontal mounting for cabinets Width (mm)
1	0 360 49[1]	300	220	0.9		
1	0 360 69	300	300	1		
1	0 360 52	300	400	1.3	400	300
1	0 360 70	400	400	1.7		
1	0 360 56	400	600	3.3	600	400
1	0 360 55	500	400	2.7		
1	0 360 71	500	500	3.5		
1	0 360 57	600	600	6.2		
1	0 360 59	600	800	8.4	800	600
1	0 360 54	600	1000	10.6	1000	600
1	0 360 58	700	500	6		
1	0 360 60	800	800	11.4		
1	0 360 61	800	1000	14.4	1000	800
1	0 360 63	1000	1000	20.5		
1	0 360 65	1000	1200	23	1200	1000
1	0 360 64	1200	800	18.5		
1	0 360 66	1200	1200	34.4		
1	0 360 67[2]	1400	800	26.4		
1	0 360 68	1400	1000	32.2		

Lina 12.5 plates

Galvanized steel.
With drilling for fixing equipment without marking.
Automatic bracket:
- Ø6.5 mm for plastic rivet Cat.No 0 366 44 (trunking)
- Ø3.3 mm for equipment with screw Cat.No 0 347 45

Pack	Cat.Nos	Vertical mounting for cabinets Height (mm)	Vertical mounting for cabinets Width (mm)	Weight (kg)	Horizontal mounting for cabinets Height (mm)	Horizontal mounting for cabinets Width (mm)
1	0 360 00[2]	300	200	0.4		
1	0 360 01[1]	300	220	0.47		
1	0 360 02	300	300	0.6		
1	0 360 04	300	400	0.8	400	300
1	0 360 05	400	400	1.1		
1	0 360 22	400	600	2.2	600	400
1	0 360 09	500	400	1.5		
1	0 360 14	500	500	1.85		
1	0 360 24	600	600	3.7		
1	0 360 33	600	800	5.2	800	600
1	0 360 40	600	1000	6.8	1000	600
1	0 360 31	700	500	3.7		
1	0 360 34	800	800	7		
1	0 360 42	800	1000	9.2	1000	800
1	0 360 43	1000	1000	11.5		
1	0 360 47	1000	1200	13.9	1200	1000
1	0 360 46	1200	800	11.1		
1	0 360 48	1200	1200	16.7		
1	0 360 75[2]	1400	800	13		
1	0 360 79	1400	1000	16.2		

Lina 25 perforated plates

Galvanized steel

Common for all types of cabinets

Pack	Cat.Nos	For cabinets Height x Width (mm)	Weight (kg)
1	0 360 07[2]	300 x 200	0.4
1	0 360 99[1]	300 x 220	0.4
1	0 360 91	300 x 300	0.5
1	0 360 11	300 x 400	0.6
1	0 360 12	400 x 300	0.6
1	0 360 92	400 x 400	0.8
1	0 360 13	400 x 600	1.1
1	0 360 15	500 x 400	0.9
1	0 360 93	500 x 500	1.1
1	0 360 16	600 x 400	1.3
1	0 360 17	600 x 600	2.1
1	0 360 06	600 x 800	3.1
1	0 360 08	600 x 1000	3.7
1	0 360 18	700 x 500	2
1	0 360 19	800 x 600	3.1
1	0 360 20	800 x 800	4
1	0 360 94	800 x 1000	5
1	0 360 23	1000 x 600	3.7
1	0 360 21	1000 x 800	4.9
1	0 360 25	1000 x 1000	6.8
1	0 360 10	1000 x 1200	8.5
1	0 360 87	1200 x 800	7.1
1	0 360 88	1200 x 1000	8.5
1	0 360 89	1200 x 1200	10.1
1	0 360 90[2]	1400 x 800	7.8
1	0 360 98	1400 x 1000	10

Clip-nuts for perforated plates
Supplied without screw

100	0 364 40	For M4 screws
100	0 364 41	For M5 screws
100	0 364 42	For M6 screws


Accessories


500	0 366 44	Rivet reinforced plastic Ø6 mm for drilling Ø6.5 mm
100	0 347 45	Screw head 4.8 x 16 mm self-drilling, self-tapping for Ø3.3 mm
200	0 347 50	Screw cover for isolation of screw head Cat.No 0 347 45 inside the trunking

1: For Marina cabinets
2: For Atlantic and Atlantic-E cabinets

Atlantic, Atlantic-E and Marina cabinets: plain plates and perforated plates

■ Mounting principle

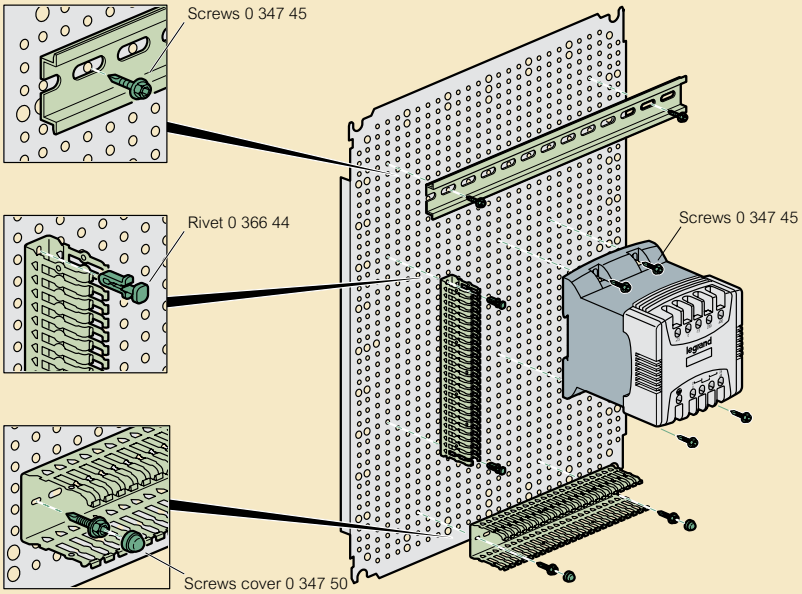


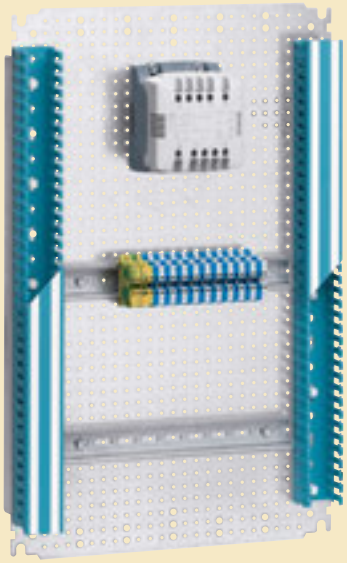

Fixing exemple on Lina 12.5 plate:
- of a transformer with screws Cat.No 0 347 45
- of a rail
- of Lina 25 cable ducting (p. 328)


■ Dimensions

Assembled chassis with rails and Lina 25 uprights




Lina 12.5 plain plates and Lina 25 perforated plates


Plain plate



Details Lina 12.5



Details Lina 25 perforated plate




Dimensions of cabinets Height x Width (mm)	Uprights height	Rail length	Chassis fixing	
	A (mm)	D (mm)	B (mm)	C (mm)
300 x 300	237	243	225	225
300 x 400	237	343	225	325
400 x 300	337	243	325	225
400 x 400	337	343	325	325
400 x 600	337	543	325	525
500 x 400	437	343	425	325
500 x 500	437	443	425	425
600 x 400	537	343	525	325
600 x 600	537	543	525	525
600 x 800	537	743	525	725
600 x 1000	537	943	525	925
700 x 500	637	443	625	425
800 x 600	737	543	725	525
800 x 800	737	743	725	725
800 x 1000	737	943	725	925
1000 x 600	937	543	925	525
1000 x 800	937	743	925	725
1000 x 1000	937	943	925	925
1000 x 1200	937	1143	925	1125
1200 x 800	1137	743	1125	725
1200 x 1000	1137	943	1125	925
1200 x 1200	1137	1143	1125	1125
1400 x 800	1337	743	1325	725
1400 x 1000	1337	943	1325	925

Cabinets dimensions Height x Width (mm)	Dimensions of plates Plain / Lina 12.5 / 25 plates		Usable space for equipment (dm²)	Mounting of plates	
	G (mm)	H (mm)		F (mm)	E (mm)
300 x 200	256	156	4.2	225	125
300 x 220	275	192	5.3	263	163
300 x 300	256	256	6.2	225	225
300 x 400(1)	256	356	8.2	225	325
400 x 300(1)	356	256	8.2	325	225
400 x 400	356	356	11.7	325	325
400 x 600(1)	356	556	18.7	325	525
500 x 400	456	356	15.2	425	325
500 x 500	456	456	19.2	425	425
600 x 400(1)	556	356	18.7	525	325
600 x 600	556	556	29.7	525	525
600 x 800(1)	556	756	40.7	525	725
600 x 1000(1)	556	956	51.7	525	925
700 x 500	656	456	28.7	625	425
800 x 600(1)	756	556	40.7	725	525
800 x 800	756	756	55.7	725	725
800 x 1000(1)	756	956	71.7	725	925
1000 x 600(1)	956	556	51.7	925	525
1000 x 800(1)	956	756	70.7	925	725
1000 x 1000	956	956	89.7	925	925
1000 x 1200(1)	956	1156	108.7	925	1125
1200 x 800	1156	756	85.7	1125	725
1200 x 1000(1)	1156	956	108.7	1125	925
1200 x 1200	1156	1156	131.7	1125	1125
1400 x 800	1356	756	100.7	1325	725
1400 x 1000	1356	956	127.7	1325	925

1: For horizontal or vertical mounting

Atlantic, Atlantic-E and Marina cabinets equipment

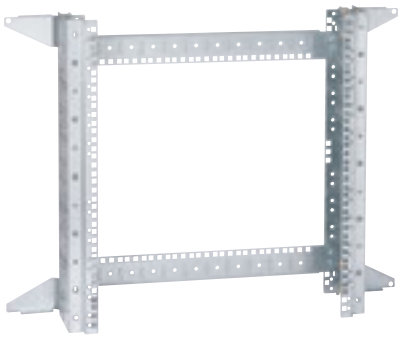

0 462 28 supplied not assembled



0 475 45



0 367 36



0 363 13



Metal Atlantic cabinet equiped with document holder Cat.No 0 365 82

Cabinet and equipement selection chart **p. 262-263**
Technical characteristics **p. 280**

Lina 25 sectioned uprights

Set of 2 uprights

Pack	Cat.Nos	For cabinets height (mm)	Length (mm)	Section
5	0 361 50	300	237	L
5	0 361 51	400	337	L
5	0 361 52	500	437	L
5	0 361 53	600	537	L
5	0 361 54	700	637	L
5	0 361 55	800	737	L
5	0 361 56	1000	937	L
1	0 361 58	1200	1137	L
1	0 361 59	1400	1337	L

Upright to be cut

10	0 361 92	Length 3 m - Section L

Lina 25 rail

Rail

For fixing onto uprights with clip nut Cat.No 0 364 42 and screw-washer Cat.No 0 367 75 (p. 281)
⌙⌜ depth 15 mm

Pack	Cat.Nos	For cabinets width (mm)	Crosspiece length (mm)	Section
10	0 367 80	300	243	
10	0 367 81	400	343	
10	0 367 82	500	443	
10	0 367 83	600	543	⌙⌜
10	0 367 84	800	743	
10	0 367 85	1000	943	
10	0 367 86	1200	1143	

Rail to be cut, length 2 m

10	0 374 02	⌙⌜ EN 60715
10	0 374 07	Symmetrical ⌙⌜ depth 15 mm
10	0 374 04	Symmetrical ⌙⌜ EN 60175 depth 7.5 mm
10	0 477 22	⌙⌜ depth 7.5 mm with oblongs
10	0 477 23	⌙⌜ depth 15 mm with oblongs

Protective conductor lug

5	0 367 36	Support lug for protection copper bar For Atlantic enclosures only

Wall-mounting VDI chassis for Atlantic, and Marina cabinets

For integrating 19" VDI equipment in Atlantic, and Marina cabinets, width 600 or 800 mm and depth 250 mm min.
In 400 mm wide cabinets, the chassis can to integrate 10'' VDI equipment
Can be fixed directly to the wall to create a wall-mounting chassis (without cabinet)
Self-locking cable ties and cable ties with tightenning indicator (p. 762) can be fitted

1	0 462 27	6 U chassis
1	0 462 28	12 U chassis
1	0 462 29	16 U chassis


Copper bars

Copper bars with tapped holes

Pack	Cat.Nos	Cross-section (mm)	Permis I (A)	Tapped holes Ø mm	Tapped holes Pitch	Length (mm)
10	0 373 88	12 x 2	110	M5	18	990
10	0 373 89	12 x 4	160	M5	18	990

Connectors for bars with tapped holes

100	0 373 65[1]	1 or 2 conductor from 1.5 to 10 mm² (supplied with Ø5 mm screws)



Non perforated copper bar

Pack	Cat.Nos	Cross-section (mm)	Permis I (A)	Length (mm)
10	0 373 49	12 x 4	180	991.5

Connectors for bar Cat.No 0 373 49



100	0 373 60	1.5 to 4 mm²
10	0 373 61	6 to 16 mm²
10	0 373 62	10 to 35 mm² (supplied with M6 CHC Ø5 mm)

Door contact

1	0 363 13	For example, to cut off the air conditioning and the lighting supply as soon as the enclosure or cabinet door is opened 3 A - 240 V 1 NC contact + 1 NO contact For Atlantic, Atlantic-E and Marina cabinets Supplied with fixing lug

Hinged glass doors

IP 54
Anodised aluminium frame
Polycarbonate transparent window, 3 mm stick
Neoprene seal
455 key lock. 120° opening
Supplied complete with drilling template
For devices on front panels. Protect the devices and prevent accidental operation

Pack	Cat.Nos	Width (mm)	Height (mm)	External dim. Width (mm)	Window Height (mm)	Window Depth (mm)	Usable Depth (mm)
1	0 475 45	300	400	50	230	330	42
1	0 475 46	400	400	50	330	330	42
1	0 475 47	500	500	50	430	430	42


Self adhesive document holder (for plans)

Open - RAL 7035

Pack	Cat.Nos	External dimensions Width (mm)	External dimensions Height (mm)	Internal dimensions Width (mm)	Internal dimensions Height (mm)	Internal dimensions Depth (mm)
20	0 365 80	340	235	310	200	18
20	0 365 81	260	165	230	130	18

Closed - RAL 7035

1	0 365 82	Rigid plastic - IP 50 Internal dimensions: 324 x 120 x 18 mm



Transparent

10	0 097 99	Flexible plastic - A4 - 320 x 220 mm


1: Protective conductor per connector (art. 12 of French decree of 14/11/89)

Red catalogue numbers: New products

Atlantic, Atlantic-E and Marina cabinets chassis and internal doors








0 361 03 mounted in cabinet
Cat.No 0 354 94

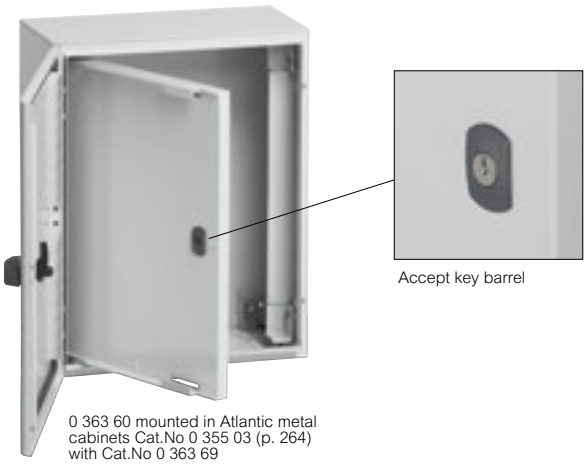


Accept key barrel

0 363 60 mounted in Atlantic metal cabinets Cat.No 0 355 03 (p. 264) with Cat.No 0 363 69

Cabinet and equipement selection chart **p. 262-263**
Technical characteristics **p. 280**

Pack	Cat.Nos	Chassis with insulating faceplates RAL 7035	
		Symmetrical rails 15 mm depth Supplied complete with uprights and faceplates Space between door and faceplate for Atlantic, Atlantic-E and Marina cabinets : - 70 mm for cabinets depth 200 mm - 80 mm for cabinets depth 250 mm - 90 mm for cabinets depth 300 mm Self extinguishing 750 °C acc. to IEC EN 60695-2-11	
1	0 361 01	**For cabinets 400 x 300 x 200** 30 modules (3 rows of 10) Supplied with 1 blanking plate	
1	0 361 02	**For cabinets 500 x 400 x 200** 48 modules (3 rows of 16) Supplied with 1 blanking plate	
1	0 361 03	**For cabinets 600 x 400 x 250** 48 modules (3 rows of 16) Supplied with 1 blanking plate	
1	0 361 05	**For cabinets 700 x 500 x 250** 84 modules (4 rows of 21) Supplied with 1 blanking plate	
1	0 361 06	**For cabinets 800 x 600 x 300** 108 modules (4 rows of 27) Supplied with 2 blanking plates Can take in 1st row a mounting plate Cat.No 0 360 44	
1	0 361 09	**For cabinets 1000 x 800 x 300** 190 modules (5 rows of 38) Supplied with 2 blanking plates Can take in 1st row a mounting plate Cat.No 0 360 45	
1	0 361 10	**For cabinets 1200 x 800 x 300** 228 modules (6 rows of 38) Supplied with 2 blanking plates Can take in 1st row a mounting plate Cat.No 0 360 45	
		Blanking plate	
10	0 361 00	38 modules, length 684 mm	

Pack	Cat.Nos	Mounting plates
1	0 360 44	For 800 x 600 mm cabinets for DPX 125, 160 MCCBS or Vistop 160 A For DPX-IS 250, 63 to 250 A, please consult us
1	0 360 45	For 1000 x 800 mm or 1200 x 800 mm cabinets For 1, 2 or 3 DPX 125,160, 250ER MCCBS or Vistop 160 A For DPX-IS 250, 63 to 250 A, please consult us



Internal doors RAL 7035


For direct mouting in Marina cabinets, with Cat.No 0 363 69 in Atlantic metal cabinets
IP XXB
Polyester fiber glass reinforced, height 4 mm
Self-extinguishing 960°C acc. to IEC EN 60695-2-11
Grid lines integrated on back
Centre marking on front
Adjustable distance between cabinet door and internal door: 42 to 50 mm for Atlantic cabinets, more than 100 mm for Marina cabinets
Right or left opening, captive hinge pins
Double bar key: 1 key for 400 to 600 mm height, 2 keys for height from 700 mm
Take key barrels and other barrels

Pack	Cat.Nos	For cabinets Height x Width (mm)	Dim. (mm) Height x Width	Usable dim. (mm) Height x Width
1	0 363 59	400 x 300	341 x 236	305 x 185
1	0 363 60	500 x 400	441 x 336	405 x 250
1	0 363 61	600 x 400	541 x 336	505 x 250
1	0 363 62	700 x 500	642 x 436	500 x 340
1	0 363 63	800 x 600	742 x 536	600 x 440
1	0 363 64	1000 x 800	942 x 736	800 x 640
1	0 363 65	1200 x 800	942 x 736	800 x 640

Pack	Cat.Nos	Accessory
1	0 363 69	Accessory for mounting internal doors in Atlantic metal cabinets

Atlantic, Atlantic-E and Marina cabinets
rails and uprights


Assembled chassis with rails and Lina 25 uprights

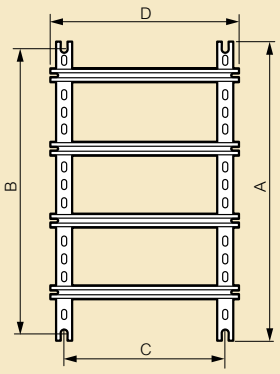


Dimensions of cabinets Height x Width (mm)	Uprights height	Rail length	Chassis fixing	
	A (mm)	D (mm)	B (mm)	C (mm)
300 x 300	237	243	225	225
300 x 400	237	343	225	325
400 x 300	337	243	325	225
400 x 400	337	343	325	325
400 x 600	337	543	325	525
500 x 400	437	343	425	325
500 x 500	437	443	425	425
600 x 400	537	343	525	325
600 x 600	537	543	525	525
600 x 800	537	743	525	725
600 x 1000	537	943	525	925
700 x 500	637	443	625	425
800 x 600	737	543	725	525
800 x 800	737	743	725	725
800 x 1000	737	943	725	925
1000 x 600	937	543	925	525
1000 x 800	937	743	925	725
1000 x 1000	937	943	925	925
1000 x 1200	937	1143	925	1125
1200 x 800	1137	743	1125	725
1200 x 1000	1137	943	1125	925
1200 x 1200	1137	1143	1125	1125
1400 x 800	1337	743	1325	725
1400 x 1000	1337	943	1325	925

Lina 25 sectioned uprights and uprights to be cut


Cat.No 0 361 92



Cat.Nos 0 361 50/51/52/ 53/54/55/56




Cat.No 0 361 58/59




1: Saw notch for upright length x pitch 25, the 2 others for uprights Cat.Nos 0 361 50/51/52/53/54/55/56

Rails


Cat.No 0 374 02




Cat.Nos 0 367 80/81/82/83/84/85/86 and 0 374 07



Cat.No 0 477 22



Cat.No 0 477 23



locking accessories

Pack	Cat.Nos	
		Lock housings for rebate locks or key barrets
		For Atlantic and Marina cabinets
10	0 368 04	Lock
10	0 368 05	Knob (with blanking plate)
10	0 368 06	Knob fitted with key barrel 2433 A
		Padlocking
		Takes 3 safety padlocks Cat.No 0 227 97 (p. 66) Shackle Ø6 mm max.
1	0 365 11	For fitting on Atlantic and Marina knob or lock RAL 7021 painted steel
1	0 365 13	Padlock adaptor stainless steel for Marina cabinets height ≥ 400 mm additional to latches Takes 3 padlocks Ø6 max.
		Locking latches
10	0 365 30	For Marina cabinets
10	0 368 43	For Atlantic 1-door cabinet
		Metal rebate locks
		For Atlantic and Marina cabinets
10	0 368 17[1]	Triangle male 6.5 mm
10	0 368 18[1]	Triangle male 8 mm
10	0 368 19[1]	Triangle male 9 mm (EDF)
10	0 368 20[1]	Double bar
		Key barrels
		For Atlantic and Marina cabinets Supplied with set of 2 key
10	0 368 22[1]	For key No 405
10	0 368 23[1]	For key No 421
10	0 368 24[1]	For key No 455
10	0 368 25[1]	For key No 1242 E
10	0 368 26[1]	For key No 2433 A
10	0 368 27[1]	For key No 3113 A
10	0 365 45[1]	Set of two 2433 A keys Other key code: please consult us
		Metal keys for rebate locks
10	0 365 35	Square female 6 mm
10	0 365 39	Triangle male 6.5 mm
10	0 365 40	Triangle male 8 mm
10	0 365 41	Triangle male 9 mm (EDF)
10	0 365 42	Double bar
1	0 368 42	Multi-size key for rebate locks: square male 8 mm, square male 6 mm, Triangle male 8 mm and double bar

1: Except Marina enclosures: please consult us

Red catalogue numbers: New products