

RC-suppressor

Part no. **RCDILE48**

Article no. **044264**

Powering Business Worldwide™

Program

Accessories			Suppressor circuit
Description			RC suppressor
Actuating voltage	U_s	V	24 - 48 AC
Contact sequence			
For use with			DILE...

InstructionsFor AC operation contactors 50 - 60 Hz.
The suppressor is fitted as standard in DC operated contactor relays.
Note drop-out delay

Approbationen

UL approval	Yes
CSA approval	No
Product Standards	IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.	E29184
UL CCN	NKCR2
CSA File No.	-
NA Certification	UL recognized
Specially designed for NA	No

Technical data according to ETIM 4.0

Function			RC suppressor
Rated control voltage Us at AC 50 Hz		V	48
Rated control voltage Us at AC 60 Hz		V	48
Rated control voltage Us at DC		V	0
With LED display			No
Voltage type for actuation			AC

CAD-Data

Product standards CAD data: http://eaton-moeller.partcommunity.com

Dimensions

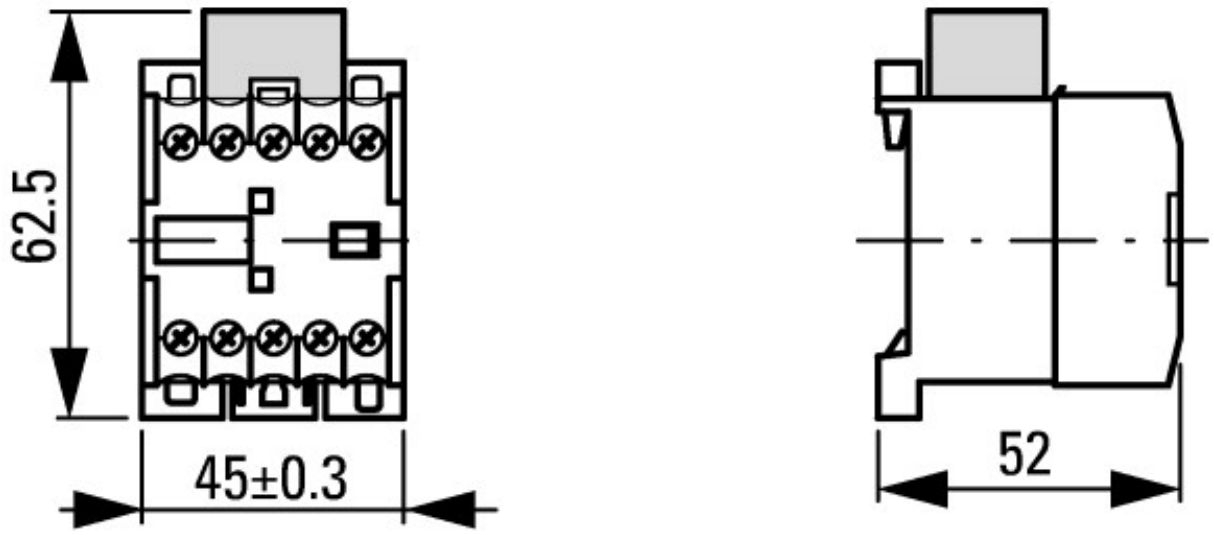

DILE + RCDILE

Additional product information (links)

Engineering	
Technical overview	ftp://ftp.moeller.net/DOCUMENTATION/PDF/GB/OVT_DIL_de.pdf
Contact travel diagram for contactors	ftp://ftp.moeller.net/DOCUMENTATION/PDF/GB/CHA_DIL_DIAG.PDF

© 07/2011 by Eaton Industries GmbH