SIEMENS

Data sheet 5ST3043

UNDER-VOLTAGE RELEASE F.MOUNT., F. LS-SWITCH T=70MM AC 230V, WITH 2TERMINALS



Figure similar

General technical data		
Switching function / ON-delay/instantaneous contact		No
Type of voltage / for actuation		AC
Control current		
Control supply voltage		
• at AC / at 50 Hz / Rated value / minimum	V	230
• at AC / at 50 Hz / Rated value / maximum	V	230
• at AC / at 60 Hz / Rated value / minimum	V	230
• at AC / at 60 Hz / Rated value / maximum	V	230
Suitability		
Suitability for integration		
• motor starter protector		No
• overload relay		No
Suitability for use		
• load switch		No
• circuit breaker		No
Number		

Changes preserved
© Copyright Siemens AG

Number of NC contacts		0
Number of NO contacts		0
Number of CO contacts		0

Connections

Type of electrical connection		screw-type terminals

General Product Approval	Declaration of Conformity	other	
		Umweltbestätigung	sonstig

EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs


Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST3043


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5ST3043/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3043


CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv



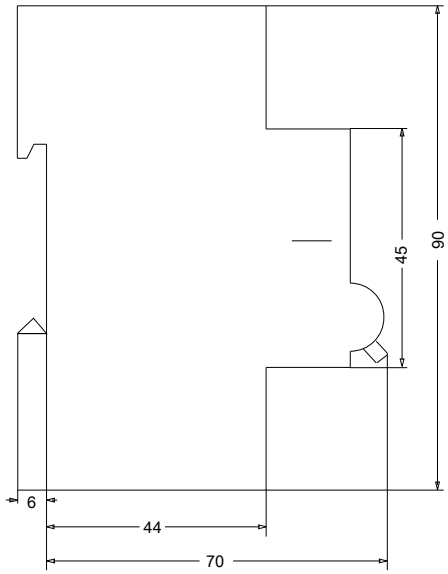

Changes preserved
© Copyright Siemens AG

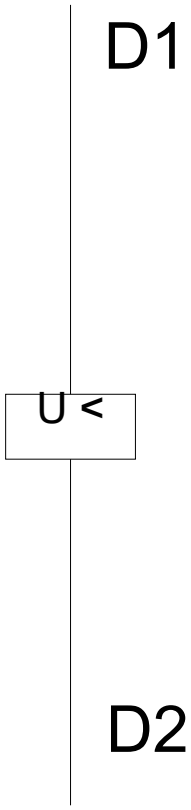

last modified: 12.10.2015

Changes preserved
© Copyright Siemens AG