
SIEMENS

Data sheet BVP:034282

BD01-AK2M1/CEE325A323 TAP-OFF UNIT

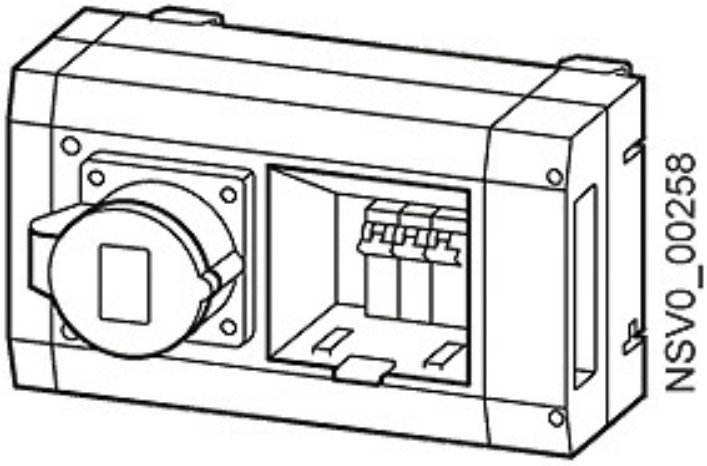

Model		
Product designation		tap-off unit for BD01 busbar trunking system
Protection class		
Protection class IP		IP54
Main circuit		
Operating frequency / Rated value		
• minimum	Hz	50
• maximum	Hz	60
Operating voltage / at AC		
• at 50 Hz / Rated value / maximum	V	400
• at 60 Hz / Rated value / maximum	V	400
Operating current		
• for circuit 1 / at AC / at 50 Hz / Rated value / maximum	A	32
• for circuit 1 / at AC / at 60 Hz / Rated value / maximum	A	32
Tap-off points		
Outgoing unit version		socket

Changes preserved
© Copyright Siemens AG

Design of short-circuit and overloading protection / in the outgoing unit		3-pole 32 A miniature circuit-breaker
Size of the outgoing feeder		2
Number of poles / of the outgoing feeder		5

Mechanical Design

Height	mm	176
Width	mm	160
Length	mm	265
Number of width units		8
Product component / Locking mechanism		Yes

General Product Approval	Declaration of Conformity
EAC	CE EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/BVP:034282

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/BVP:034282/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:034282

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

last modified: 27.10.2015

Changes preserved
© Copyright Siemens AG