
MOELLER

Type: **NZM2–XSTS**
Article No.: **260156**
Sales text **Control circuit terminal**



Ordering information			
For use with			
Motor rating AC–3 at 400 V 50/60 Hz			NZM2(–4), PN2(–4), N(S)2(–4)
Motor rating AC–3 at 400 V 50/60 Hz			Three– and four–pole
Terminal capacities			
Type of conductor			Screw connection
Terminal capacities		mm^2	1 × 0.75 – 2.5 2 × 0.75 – 1.5
AWG/kcmil		mm^2	1 × 18 – 14 2 × 18 – 16

Notes concerning the product group

Type contains parts for two terminal locations located at top or bottom for 3 or 4–pole circuit–breakers.

Included as standard with tunnel terminal

Degree of protection IP1X


NZM–XSTK cannot be combined with NZM2(–4)–XIPK IP2X protection against contact with a finger.

Height or thickness of the control circuit terminals:

NZM–XSTK = 2 mm

NZM–XSTS = 2 mm

Dimensions

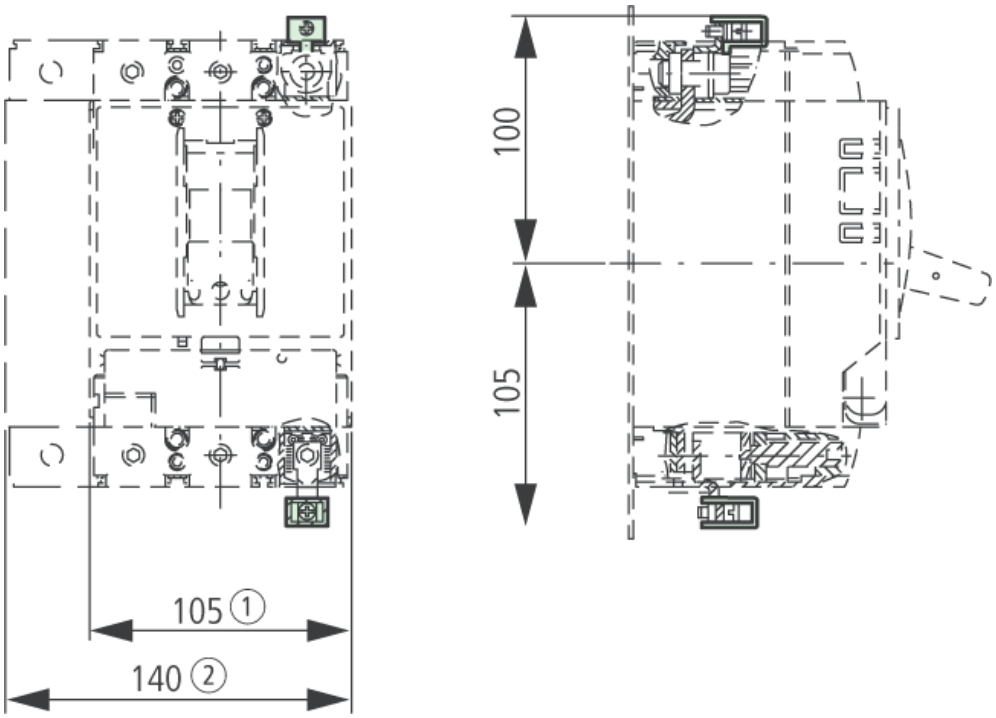

3 pole
4 pole

Moeller GmbH, Hein–Moeller–Str. 7–11, D–53115 Bonn
E–Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net
HPL–C2007G V2.1 © 2007 by Moeller GmbH