

Spacers

Part no. NZM1/2-XAB
Article no. 260203

Powering Business Worldwide™

Enables fast and low-priced adjustment of differing frame sizes with/without rotary handle to the same front depth

Delivery programme

			Spacers
For use with			NZM1(-4), PN1(-4), N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)

Notes

Grid depth 17.5 mm, M4 thread

Type contains 4 off spacer

Maximum component capacity:

NZM1: 4 units per fixing screw,

NZM2: 2 units per fixing screw

2 (NZM1) or 4 (NZM2) fixing screws contained per circuit-breaker


Approvals

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL listed, CSA certified


Technical data ETIM 4.0

Surface			-
Inner diameter		mm	0
Material			Insulated material
Length		mm	0

Dimensions

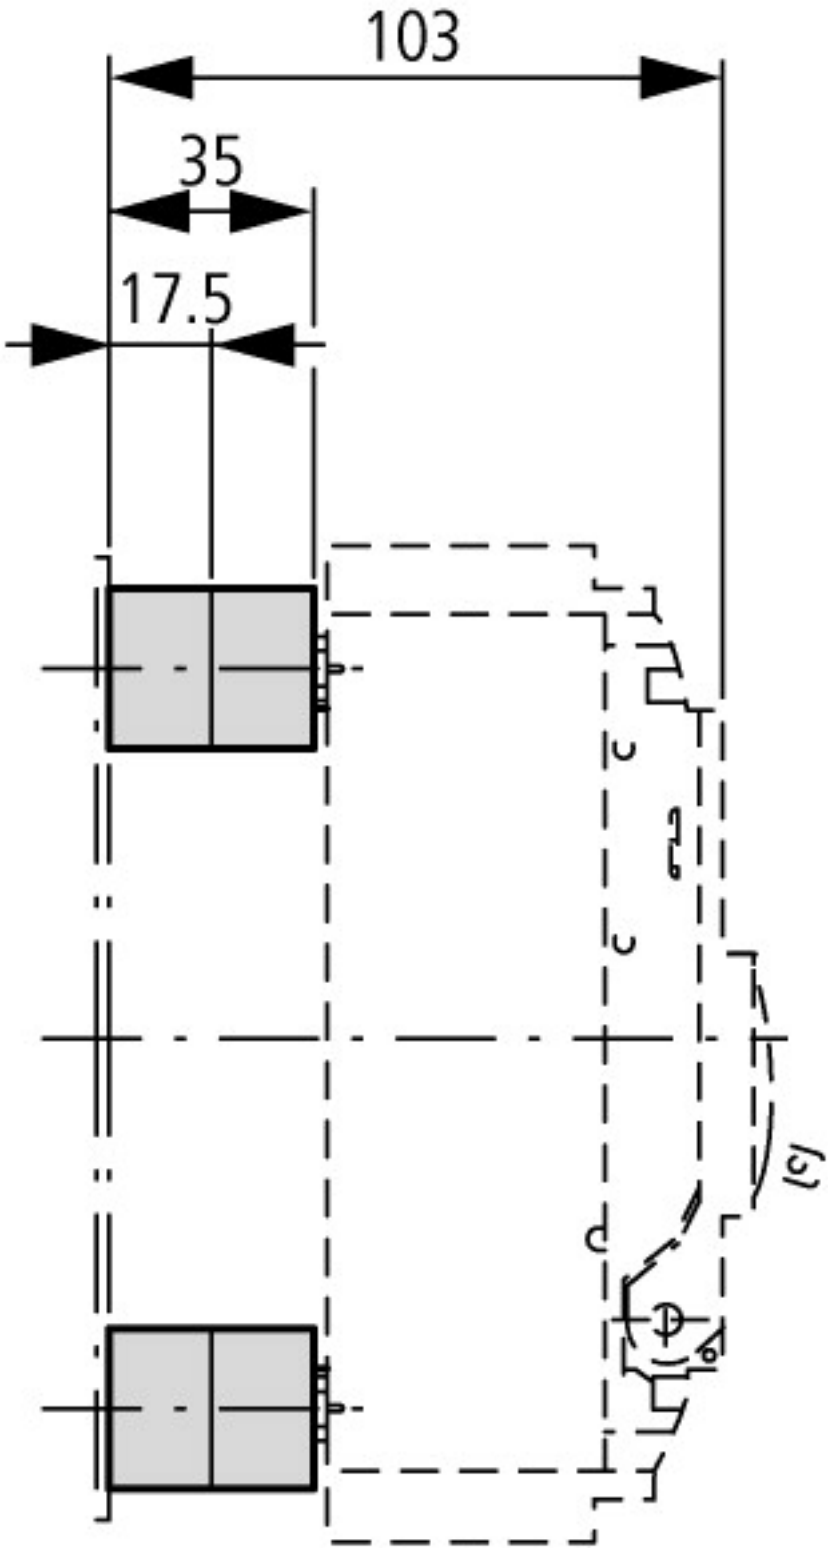

with NZM1, PN1, N1

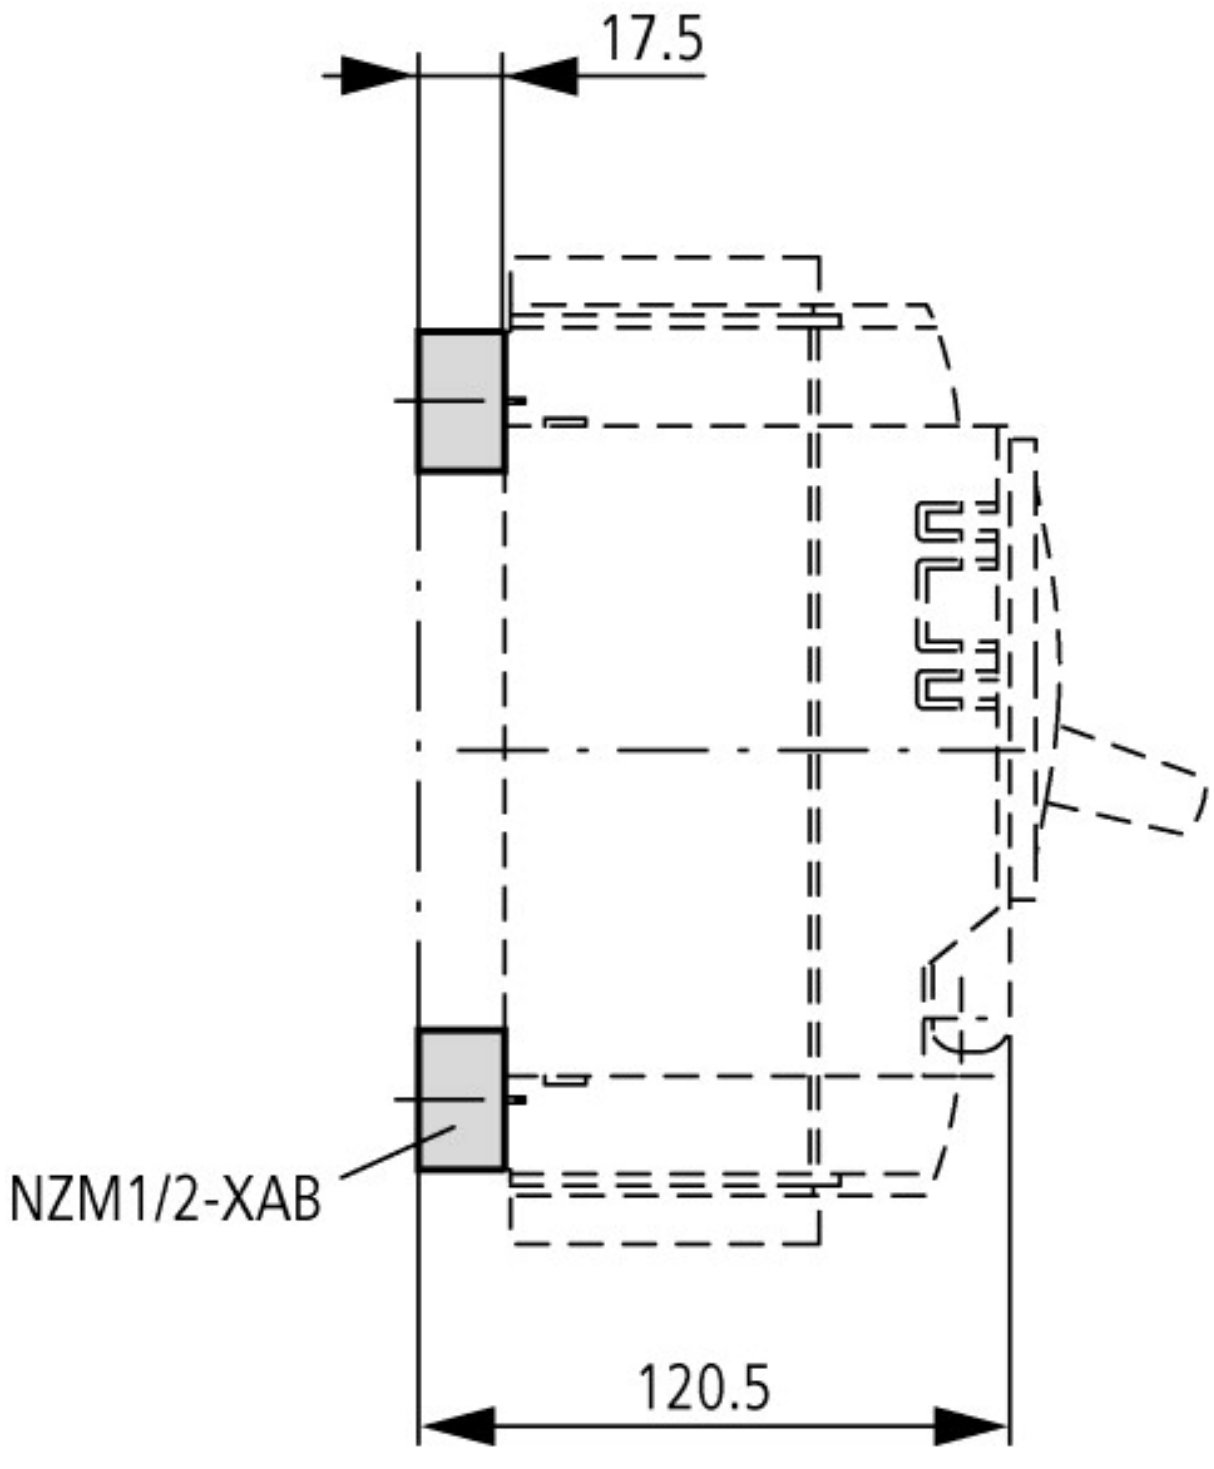

with NZM2, PN2, N2

Additional product information (links)

IL01203002Z (AWA1230-1914) Shunt release, Undervoltage release, Early-make auxiliary contact	
IL01203002Z (AWA1230-1914) Shunt release, Undervoltage release, Early-make auxiliary contact	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01203002Z2010_11.pdf

© 11/2012 by Eaton Industries GmbH