# OBUDOWY Z TWORZYWA **"UNIbox"**
PLASTIC HERMETIC BOXES

PN-EN 62208:2011
- Stopień ochrony • Protection class: IP 65
- Klasa ochronności • Class of protection: II
- Unr 230/400V Uni 500V • RAL 7035

**IP 65**

Obudowy produkowane są z tworzywa sztucznego ABS w kolorze szarym RAL 7035, wyposażone w uszczelkę pozwalająca uzyskać wysokie parametry szczelności, płytę montażową perforowaną, drzwi w kolorze szarym lub transparentnym wykonane z PC (poliwęglan) na zawiasach zamykanych za pomocą zamka z metalowym kluczem. Istnieje możliwość zamontowania zamka z tworzywa. Uniwersalność zastosowania oraz dokładnie wykonane elementy w efekcie końcowym dają solidną i estetycznie wyglądającą obudowę.

The plastic boxes are made of plastic in grey color RAL 7035, equipped with rubber seal allowing to get high parameters of sealing, assembly plate, door in grey or transparent color made of PC (polycarbonate) with hinges, that might be closed with one or two locks with a key. Universal application and precisely made elements as a result gives solidly made and aesthetically looking plastic box.

Obudowa wyposażona jest w uchwyty do montażu naściennego.

The plastic boxes are equipped with plastic wall hooks.













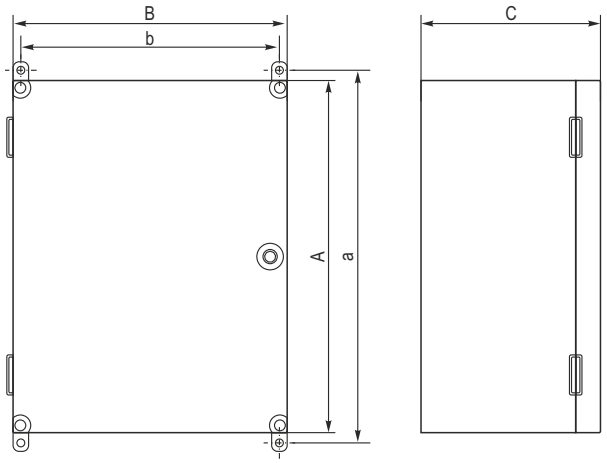

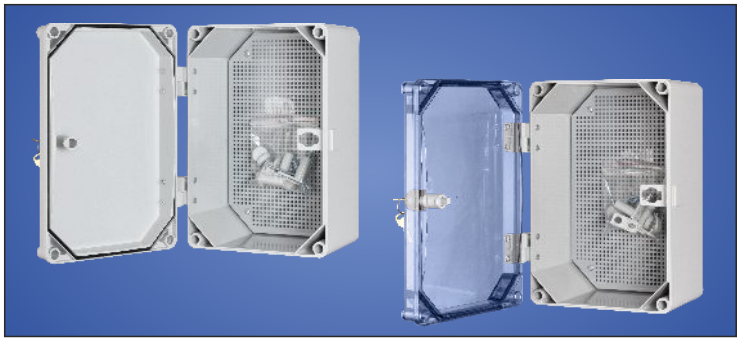














| Nr kat. Cat No. | Nazwa Name | Wymiary / Dimensions | | | | | Płyta montażowa Assembly plate [mm] |
|---|---|---|---|---|---|---|---|
| | | A [mm] | B [mm] | a[mm] | b[mm] | C [mm] | |
| 43.01 | UNI - mini | 300 | 200 | 320 | 180 | 160 | 185 x 285 x 9 |
| 43.0 | UNI - 0 | 300 | 300 | 320 | 275 | 160 | 285 x 285 x 9 |
| 43.1 | UNI - 1 | 400 | 300 | 420 | 275 | 160 | 385 x 285 x 9 |
| 43.2 | UNI - 2 | 500 | 400 | 520 | 375 | 179 | 485 x 385 x 9 |
| 43.02 | UNI - mini/T | 300 | 200 | 320 | 180 | 160 | 185 x 285 x 9 |
| 43.00 | UNI - 0/T | 300 | 300 | 320 | 275 | 160 | 285 x 285 x 9 |
| 43.11 | UNI - 1/T | 400 | 300 | 420 | 275 | 160 | 385 x 285 x 9 |
| 43.22 | UNI - 2/T | 500 | 400 | 520 | 375 | 179 | 485 x 385 x 9 |