

Switched neutral

Part no.	**N-P3Z**
Article no.	**064805**
Catalog No.	**SPX-N-P3ZQ**

Delivery programme

Product range			Accessories
			Neutral conductor contacts
			Early-make switching-on behavior, late-break switching-off behavior The N contact always behaves as an early-make contact when switching on and as a late-break contact when switching off. N-P1(P3)… switching capacity same as for contacts P1(P3)-… For P1-…/I2: optionally, N-P1Z or HI11-P1/P3Z, can only be retrofitted on the left
For use with			P3-…/Z, …/V, …/IVS P3-63…/Z, …/I4 P3-100…/Z, …/I5

Approvals


Product Standards	UL 508; CSA-C22.2 No. 14-05; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified

Technical data ETIM 5.0

Low-voltage industrial components (EG000017) / Accessories for low-voltage switch technology (EC002498)
Electric engineering, automation, process control engineering / Low-voltage switch technology / Low-voltage switch technology (accessories) / Component for low-voltage switch technology (accessories) (ecl@ss8-27-37-92-01 [AKN570009])

Type of accessory			4th pole

Dimensions

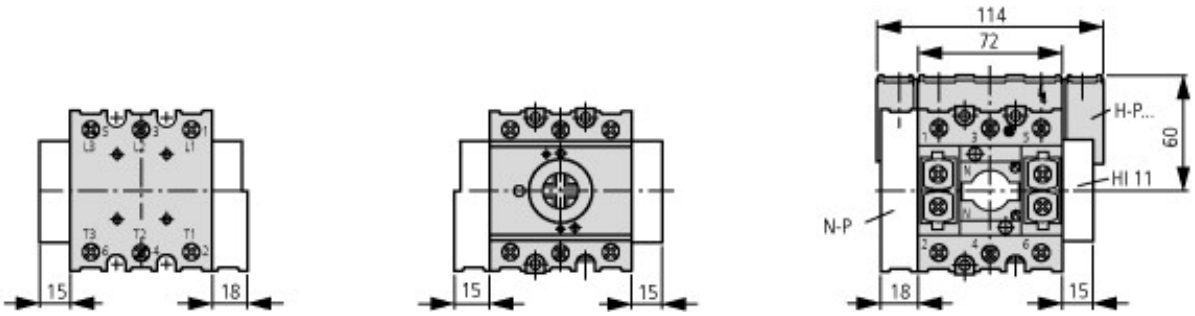

© 10/2013 by Eaton Industries GmbH