DIGITUS® Professional

DN-91325-1
4016032269007



Najwyższa wydajność i jakość łącza w sieci

Panel krosowy kat. 3 ISDN, 25 portów 1 U

- Możliwość montażu w szafie 483 mm (19")
- Materiał: SECC, 1.5mm elektrogalwanizowana, tłoczona na zimno stal zgodnie z JIS G3141-1996
- Moduł RJ45 nieekranowany
- Materiał styków: fosforobrąz
- Pokrycie kontaktów: nikiel, złoto 0,3µ
- Instalacja w listwach LSA, kodowanie kolorami zgodne z EIA/TIA 568 A & B
- Materiał terminala IDC: fosforobrąz z 60µ warstwą niklu pokrytą 50µ warstwą cyny
- Materiał PCB: FR4, UL 94V-0, wielowarstwowy o grubości 1,45 mm
- Siła wtyku: ≤ 30N
- Ilość cykli: ≥ 750 (ISO/IEC 11801, IEC 60603-7-5)
- Temperatura pracy: -20°C do +70°C
- Obciążalność prądowa: 1A przy 50°C
- Rezystancja izolacji > 500MOhm
- Kategoria: Kat. 3
- Porty: 25
- Kolor: jasnoszary RAL 7035
- U: 1


DIGITUS
Professional
• Cable installation via LSA strips
• For 22 - 26 AWG wires
DIGITUS COMPUTER NETWORK PERIPHERALS
100% tested High Quality for IT-Professionals
Designed and verified in Germany
19" CAT 3 ISDN
PATCH PANEL



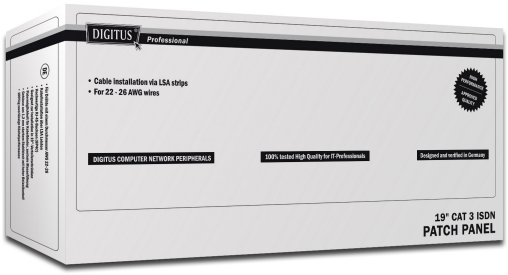
DIGITUS
Professional
• Cable installation via LSA strips
• For 22 - 26 AWG wires
DIGITUS COMPUTER NETWORK PERIPHERALS
100% tested High Quality for IT-Professionals
Designed and verified in Germany
19" CAT 3 ISDN
PATCH PANEL