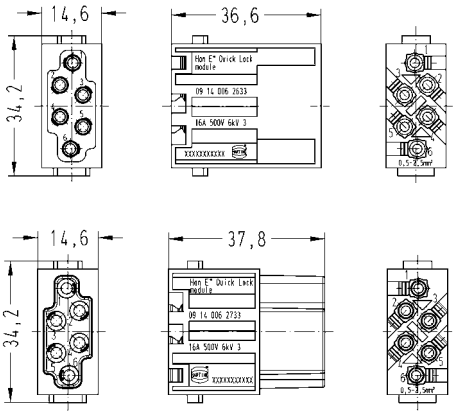
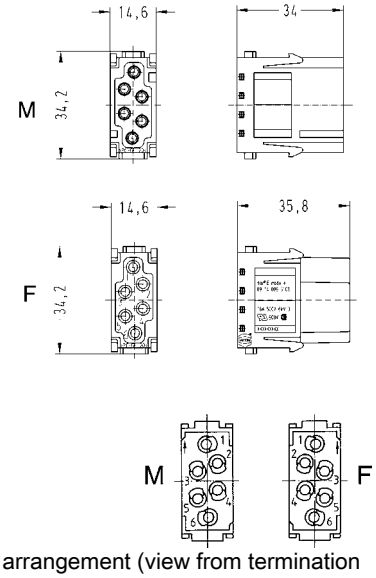
Han E® module

Number of contacts

6

500 V
16 A

Identification	Wire cross section (mm²)	Part number male	Part number female	Drawing Dimensions in mm
Han-Quick Lock® Han-Modular®, Han E® module, Han-Quick Lock® termination, silver plated contacts, contact resistance ≤1 mOhm 	0.5 – 2.5	09 14 006 2633	09 14 006 2733	 Contact arrangement (view from termination side)
Han-Modular®, Han E® module, Crimp terminal  Please order crimp contacts separately.		09 14 006 3001	09 14 006 3101	 Contact arrangement (view from termination side)