SIEMENS

Product data sheet 3RV1913-1DA00



MOULDED-PLASTIC ENCLOSURE FOR WALL MOUNTING,
DEGREE OF PROTECTION IP55,
WITH N AND PE TERMINAL, 72MM

Certificates/ approvals:

General Product Approval		Declaration of Conformity	Test Certificates
EAC	GOST	EG-Konf.	Special Test Certificate

Shipping Approval

ABS	BUREAU VERITAS	RMRS

other

Confirmation	Declaration of Conformity	other	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system)
http://www.siemens.com/industrial-controls/mall

Cax online generator
http://www.siemens.com/cax

subject to modifications
© Copyright Siemens AG 2014

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/3RV1913-1DA00/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV1913-1DA00

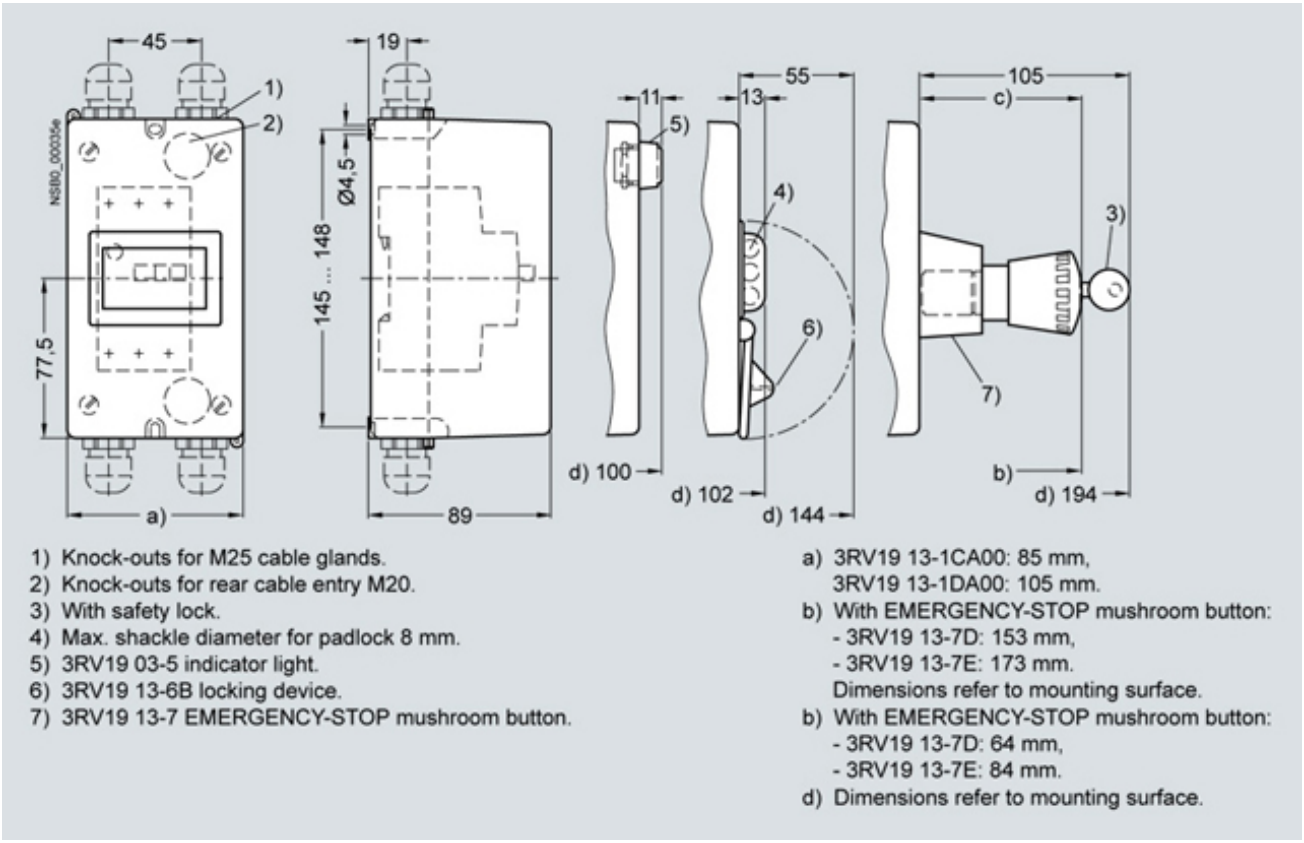

1) Knock-outs for M25 cable glands.
2) Knock-outs for rear cable entry M20.
3) With safety lock.
4) Max. shackle diameter for padlock 8 mm.
5) 3RV19 03-5 indicator light.
6) 3RV19 13-6B locking device.
7) 3RV19 13-7 EMERGENCY-STOP mushroom button.

a) 3RV19 13-1CA00: 85 mm,
3RV19 13-1DA00: 105 mm.
b) With EMERGENCY-STOP mushroom button:
- 3RV19 13-7D: 153 mm,
- 3RV19 13-7E: 173 mm.
Dimensions refer to mounting surface.
b) With EMERGENCY-STOP mushroom button:
- 3RV19 13-7D: 64 mm,
- 3RV19 13-7E: 84 mm.
d) Dimensions refer to mounting surface.

last change:

© Copyright Siemens AG 2014