SIEMENS

Data sheet 5TT5832-0

INSTA CONTACTOR WITH 2 MAKE A. 2 BREAK CONTACTS CONTACT FOR 230, 400 V AC, 25 A TRIGGERING 230 V AC

Model		
product brand name		SENTRON
Product designation		Insta contactors
Type of voltage / of the operating voltage		AC
Type of voltage / for actuation		AC
Protection class		
Protection class IP		IP20
Switching capacity		
Switching capacity active power / with filament lamp load	W	2 000
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	2.2
• maximum	W	2.2
Main circuit		
Operating voltage / rated value		
• minimum	V	440
• maximum	V	440
Operating current / rated value	A	25
Control current		
Control supply voltage		
• rated value	V	230
• rated value / maximum	V	230
Product details		
Product component / Slide for manual operation		No
Product extension / can be installed / supplementary devices		Yes
Number		
Number of NC contacts		2
Number of NO contacts		2
Mechanical Design		

Changes preserved
© Copyright Siemens AG

Height	mm	90
Width	mm	36
Depth	mm	71
Installation depth	mm	64
Number of width units		2
Net weight	g	260

Certificates

Equipment marking / acc. to DIN EN 61346-2		Q

General Product Approval			Declaration of Conformity	other
CCC	EAC	sonstig	CE EG-Konf.	Umweltbestätigung

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT58320

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5TT58320/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT58320

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

Changes preserved
© Copyright Siemens AG

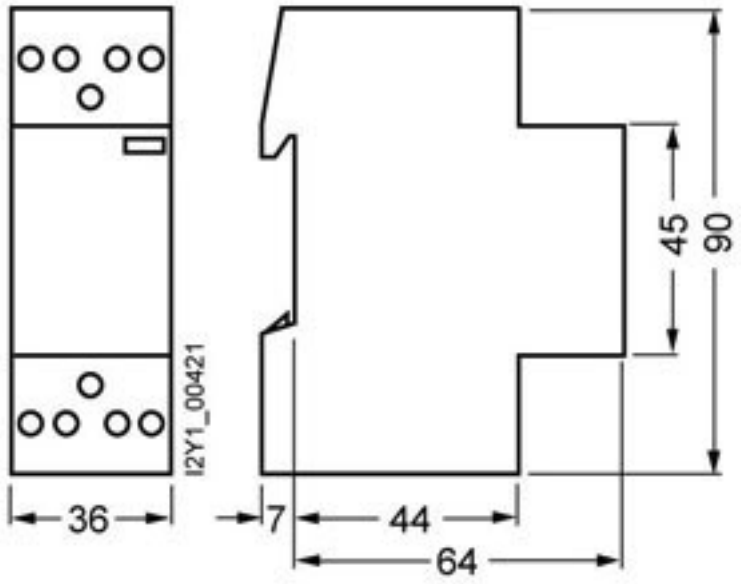

last modified: 22.03.2016

Changes preserved
© Copyright Siemens AG