PORTAL LED HV 6W 4000K

BULKHEADS

CHARACTERISTIC

Index :	199660/HV
Supply voltage :	230V
Frequency :	50Hz
Ingress protection IP :	IP54
Impact resistance IK :	IK08
Rated power :	6W
Energy efficiency class :	A
Colour temperature :	4000K
Luminous flux * :	440lm

* Initial, tolerance +/- 10%

LUMINOUS INTENSITY DISTRIB. CURVE

PORTAL LED HV 6W 4000K

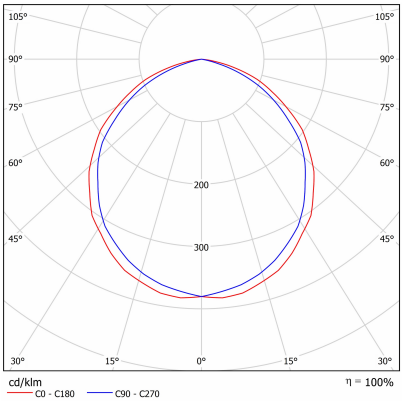

SPECIFICATION

- Surface mounted, rectangle LED light fitting, ingress protection class IP54 and an integrated energy-saving light source LED GO!.
- White ABS base; diffuser made of impact resistant PC provides even light distribution and ensures a high impact resistance class (IK08).
- Fitting available in power versions: 6W;
- Optional equipment: radio motion sensor (RCR) or a dusk sensor.
- Colour temperature 4000K, CRI>80, lifespan of LED 50.000h (L70@25°C).

APPLICATION

- Surface mounted luminaire suitable for installing on ceilings or walls.
- Dedicated for indoor use (rooms with high humidity, passageways, staircases) as well as outdoor use (facade lighting).
- Well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).

PORTAL LED HV 6W 4000K

BULKHEADS

TECHNICAL DATA

Index:	199660/HV
Supply voltage:	230V
Frequency:	50Hz
Ingress protection IP:	IP54
Impact resistance IK:	IK08
Rated power:	6W
Luminous efficacy:	73lm/W
Energy efficiency class:	A
Electrical protection class:	I
Dimensions:	280/185/55mm
Net weight of 1 unit:	0,52kg
Material of the body:	PP
Colour temperature:	4000K
Colour of the body:	White
Luminous flux* :	440lm
(EAN) European Article Number:	5905963199660
Material of the diffuser:	PC
Type of the diffuser:	Opal
Light source:	LED GO!

* Initial, tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product.
Product data sheet does not constitute an offer.

Revision date: 2015-12-07

The luminaire complies with the EU ROHS Directive 2011/65/UE.

This product is a subject to electric and electronic waste equipment regulations (WEEE).

Lena Lighting S.A.
ul. Kornicka 52
63-000 Sroda Wielkopolska

tel. +48 (61) 28 60 300
fax.+48 (61) 28 54 059
e-mail: office@lenalighting.pl
www.lenalighting.pl