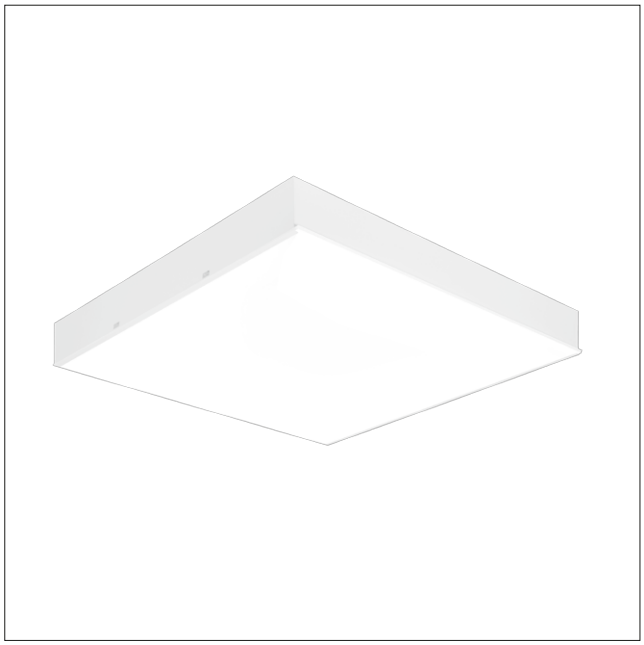

Roma LED

ROMA LED is a luminaire characterized by good luminous parameters, quick installation and a uniform luminance on the surface of the diffuser. It is designed for installation in modular ceilings with a visible supporting structure in public facilities.

Materials: powder painted steel sheet body (standard colour: white). OPAL, prismatic (PRM) and microprismatic (MPRM) diffusers. Version OPAL PLUS - convex diffuser

Installation: suspended 600x600 ceilings with visible supporting frame

Power: 230V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	5630

MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Steel sheet

INFORMATION

Colour	White

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	I
Light source protection	Yes
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminarie	I
Lifetime	> 50000 h

AVAILABE VARIANTS

Product code	Light source power [W]	Louver/ shutter	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Colour temperature [K]	Energy class	Weight [kg]
PX3718029	1×32	MPRM	3530	110	3000	A++	3.5
PX3718036	1×32	MPRM	3600	113	4000	A++	3.5
PX3718001	1×32	OPAL	3140	98	3000	A+	3.5
PX3718008	1×32	OPAL	3200	100	4000	A+	3.5
PX37181110	1×32	OPAL	3230	101	3000	A+	3.5
PX37181111	1×32	OPAL	3290	103	4000	A+	3.5
PX3718015	1×32	PRM	3480	109	3000	A+	3.5
PX3718022	1×32	PRM	3550	111	4000	A+	3.5
PX3718139	1×47	MPRM	5300	113	3000	A+	3.5
PX3718146	1×47	MPRM	5400	115	4000	A+	3.5
PX3718111	1×47	OPAL	4700	100	3000	A+	3.5
PX3718118	1×47	OPAL	4800	102	4000	A+	3.5
PX37181120	1×47	OPAL	4840	103	3000	A+	3.5
PX37181121	1×47	OPAL	4940	105	4000	A+	3.5

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

AVAILABE VARIANTS

Product code	Light source power [W]	Louver/ shutter	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Colour temperature [K]	Energy class	Weight [kg]
PX3718125	1×47	PRM	5240	111	3000	A+	3.5
PX3718132	1×47	PRM	5350	114	4000	A+	3.5
PX3718153	1×36	OPAL	3230	90	3000	A+	5.3
PX3718160	1×36	OPAL	3290	91	4000	A+	5.3
PX3718167	1×36	PRM	3580	99	3000	A+	5.3
PX3718174	1×36	PRM	3650	101	4000	A+	5.3
PX3718181	1×36	MPRM	3630	101	3000	A+	5.3
PX3718188	1×36	MPRM	3700	103	4000	A+	5.3
PX3718195	1×53	OPAL	4830	91	3000	A+	5.3
PX3718202	1×53	OPAL	4940	93	4000	A+	5.3
PX3718209	1×53	PRM	5390	102	3000	A+	5.3
PX3718216	1×53	PRM	5500	104	4000	A+	5.3
PX3718223	1×53	MPRM	5450	103	3000	A+	5.3
PX3718230	1×53	MPRM	5550	105	4000	A+	5.3
PX3718237	1×61	OPAL	5900	97	3000	A+	9.2
PX3718244	1×61	OPAL	6020	99	4000	A+	9.2
PX3718251	1×61	PRM	6540	107	3000	A+	9.2
PX3718258	1×61	PRM	6670	109	4000	A+	9.2
PX3718265	1×61	MPRM	6640	109	3000	A+	9.2
PX3718272	1×61	MPRM	6770	111	4000	A+	9.2
PX3718279	1×91	OPAL	8840	97	3000	A+	9.2
PX3718286	1×91	OPAL	9030	99	4000	A+	9.2
PX3718293	1×91	PRM	9850	108	3000	A+	9.2
PX3718300	1×91	PRM	10060	111	4000	A+	9.2
PX3718307	1×91	MPRM	9960	109	3000	A+	9.2
PX3718314	1×91	MPRM	10150	112	4000	A+	9.2

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

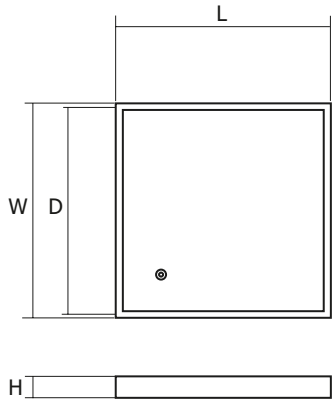

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]	E [mm]
PX3718029	596	596	80	90
PX3718036	596	596	80	90
PX3718001	596	596	80	90
PX3718008	596	596	80	90
PX37181110	596	596	80	90
PX37181111	596	596	80	90
PX3718015	596	596	80	90
PX3718022	596	596	80	90
PX3718139	596	596	80	90
PX3718146	596	596	80	90
PX3718111	596	596	80	90
PX3718118	596	596	80	90
PX37181120	596	596	80	90
PX37181121	596	596	80	90
PX3718125	596	596	80	90
PX3718132	596	596	80	90
PX3718153	295	1195	80	90
PX3718160	295	1195	80	90
PX3718167	295	1195	80	90
PX3718174	295	1195	80	90
PX3718181	295	1195	80	90
PX3718188	295	1195	80	90
PX3718195	295	1195	80	90
PX3718202	295	1195	80	90
PX3718209	295	1195	80	90
PX3718216	295	1195	80	90
PX3718223	295	1195	80	90
PX3718230	295	1195	80	90
PX3718237	595	1195	80	90
PX3718244	595	1195	80	90
PX3718251	595	1195	80	90
PX3718258	595	1195	80	90
PX3718265	595	1195	80	90
PX3718272	595	1195	80	90
PX3718279	595	1195	80	90
PX3718286	595	1195	80	90
PX3718293	595	1195	80	90
PX3718300	595	1195	80	90
PX3718307	595	1195	80	90
PX3718314	595	1195	80	90

L = Length | W = Width | H = Height / Depth | E = Installation depth

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033