MULTI CONNECTION SYSTEM **MIDI Classic**
Male Connectors
Pin Spacing 5 mm; 5.08 mm; 7.5 mm and 7.62 mm


CAGE CLAMP®

Pin spacing 5 mm/0.197 in, gray
0.08 - 2.5 mm² | AWG 28 - 12*
320 V/4 kV/3, 12 A | 300 V, 15 A
Pin spacing 7.5 mm/0.295 in, gray
630 V/6 kV/3 | 300 V, 15 A
8 - 9 mm / 0.33 in
❶ Approvals

Pin spacing 5.08 mm/0.2 in, orange
0.08 - 2.5 mm² | AWG 28 - 12*
320 V/4 kV/3, 12 A | 300 V, 15 A
Pin spacing 7.62 mm/0.3 in, orange
630 V/6 kV/3 | 300 V, 15 A
8 - 9 mm / 0.33 in
❶ Approvals

Accessories



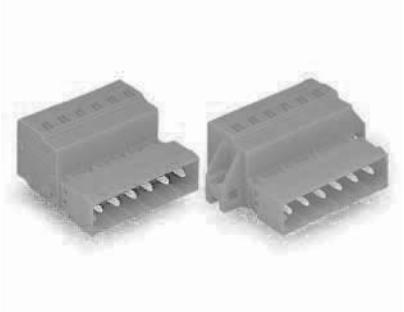



Pole No.	Item No.	Pack. Unit	Item No.	Pack. Unit
Male connector with CAGE CLAMP® and fixing flanges, for screw or similar mounting types, for vertical or horizontal mounting, gray				
Pin spacing 5 mm			with fixing flanges	
2	**231-602**	100	**231-602/019-000**	100
3	**231-603**	100	**231-603/019-000**	50
4	**231-604**	100	**231-604/019-000**	50
5	**231-605**	50	**231-605/019-000**	50
:	:		:	
12	**231-612**	25	**231-612/019-000**	25
:	:		:	
21	**231-621**	10	**231-621/019-000**	10
22	**231-622**	10	**231-622/019-000**	10
23	**231-623**	10	**231-623/019-000**	10
24	**231-624**	10	**231-624/019-000**	10
Pin spacing 7.5 mm (pole no. – 1) + 5 mm			with fixing flanges	
2	**731-602**	100	**731-602/019-000**	50
3	**731-603**	100	**731-603/019-000**	50
4	**731-604**	50	**731-604/019-000**	50
5	**731-605**	50	**731-605/019-000**	50
6	**731-606**	50	**731-606/019-000**	25
7	**731-607**	50	**731-607/019-000**	25
8	**731-608**	25	**731-608/019-000**	25
9	**731-609**	25	**731-609/019-000**	25
10	**731-610**	25	**731-610/019-000**	25
11	**731-611**	25	**731-611/019-000**	10
12	**731-612**	25	**731-612/019-000**	10
13	**731-613**	10	**731-613/019-000**	10
16	**731-616**	10	**731-616/019-000**	10

Pole No.	Item No.	Pack. Unit	Item No.	Pack. Unit
Male connector with CAGE CLAMP® and fixing flanges, for screw or similar mounting types, for vertical or horizontal mounting, orange				
Pin spacing 5.08 mm			with fixing flanges	
2	**231-632**	100	**231-632/019-000**	100
3	**231-633**	100	**231-633/019-000**	50
4	**231-634**	100	**231-634/019-000**	50
5	**231-635**	50	**231-635/019-000**	50
:	:		:	
12	**231-642**	25	**231-642/019-000**	25
:	:		:	
21	**231-651**	10	**231-651/019-000**	10
22	**231-652**	10	**231-652/019-000**	10
23	**231-653**	10	**231-653/019-000**	10
24	**231-654**	10	**231-654/019-000**	10
Pin spacing 7.62 mm (pole no. – 1) + 5.08 mm			with fixing flanges	
2	**731-632**	100	**731-632/019-000**	50
3	**731-633**	100	**731-633/019-000**	50
4	**731-634**	50	**731-634/019-000**	50
5	**731-635**	50	**731-635/019-000**	50
6	**731-636**	50	**731-636/019-000**	25
7	**731-637**	50	**731-637/019-000**	25
8	**731-638**	25	**731-638/019-000**	25
9	**731-639**	25	**731-639/019-000**	25
10	**731-640**	25	**731-640/019-000**	25
11	**731-641**	25	**731-641/019-000**	10
12	**731-642**	25	**731-642/019-000**	10

Dimensions

L = (pole no. x pin spacing) + 3.2 mm L_1 = L – 1.7 mm L_2 = L – 1.2 mm
L_3 = L – 0.2 mm L_4 = L_3 + 5.8 mm L_5 = L_3 + 11.8 mm

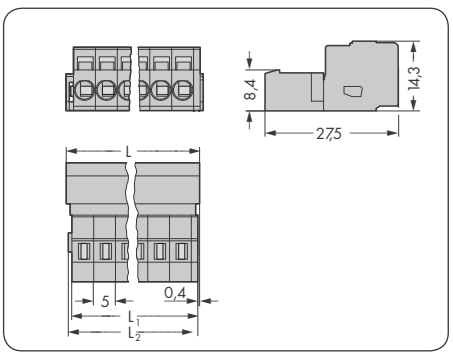

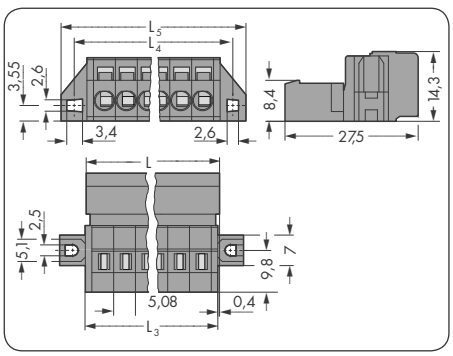

Accessories, Series 231 and 731 — Item No.

Marking strips, 100 self-adhesive strips



Pin spacing 5 mm		
1–12 (300x)	**210-331/500-103**	
13–24 (300x)	**210-331/500-104**	
Pin spacing 5.08 mm		
1–12 (200x)	**210-331/508-103**	
13–24 (200x)	**210-331/508-104**	
Pin spacing 7.5 mm		
1–16 (100x)	**210-331/750-202**	
Pin Spacing 7.62 mm		
1–16 (100x)	**210-331/762-202**	

Operating tool with partially insulated shaft,



type 2, (3.5x0.5) mm blade **210-720** 1

Coding key, snap-on type,



5 mm and 5.08 mm pin spacing		
light gray	**231-129**	100
7.5 mm and 7.62 mm pin spacing		
light gray	**231-130**	100

Insulation stop, 5 pcs/strip



5 mm and 5.08 mm pin spacing		
0.08–0.2mm² ❷		
white	**231-670**	200
0.25–0.5 mm²		
light gray	**231-671**	200
0.75–1mm²		
dark gray	**231-672**	200
7.5 mm and 7.62 mm pin spacing		
0.08–0.2mm² ❷		
white	**231-673**	200
0.25–0.5 mm²		
light gray	**231-674**	200
0.75–1mm²		
dark gray	**231-675**	200

❷ 0.2 mm² "sol." (0.14 mm² "f-st")

Tapping screw,



for 1.8 mm Ø mounting hole
B 2.2 x 9.5 mm **209-147** 100

Separator, for formation of groups



light gray **231-500** 100

❶ Approvals are available online at: www.wago.com. * AWG 14: THHN, THWN
For technical explanations and abbreviations, see technical section.