DIGITUS Professional VGA Splitter 350MHz, 4-Port

DS-42100
EAN 4016032323785



Video Splitter 1 PC, 4 Monitors 350 MHz,HDSUB 15/M - 4 X HDSUB 15/F Max. Res. 2048x1536p

With a video splitter you can use one video source to display identical images on 2, 4, 8, or 16 monitors - or on even more screens by means of cascading. Thus, a video splitter can be used in various application fields, e.g. test bench facilities, data centers, help desks, video broadcasting, presentations and educational facilities.

Provides simultaneous display on four different monitors - Perfect for classrooms, tradeshows, or in-store displays!

- Video bandwidth: 350MHz
- Max. resolution: 2048x1536p @60Hz
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)
- Metal housing for better EMI shielding
- Max. transmission distance: 75m
- Video IN/OUT: HD DSUB, 15-pin, jacks

Package contents

- VGA Splitter 350 MHz, 4-Port
- Power supply
- Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	27.00	49.00	55.00	49.00	132,055.00
Packaging Unit Inside	1	2.70	14.80	25.00	6.00	2,220.00
Packaging Unit Single	1	2.70	14.80	25.00	6.00	2,220.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:







Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

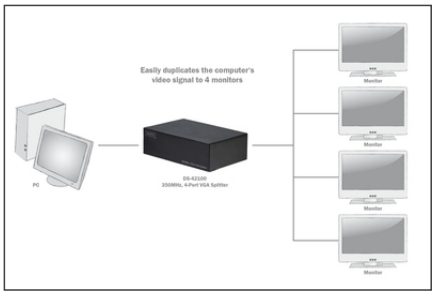



Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.