Cablofil®
key to finishes and symbols

■ Key to finishes

Symbol	Description
GS	Pre-galvanised
EZ	Electrogalvanising after manufacture
EZ+	Organically coated electrogalvanised after manufacture
GC	Hot dip galvanised after manufacture
DC	Geomet®
304L	Stainless steel 304 L
316L	Stainless steel 316 L
Z+	Continuous galvanisation before manufacture


For detailed information related to finishes, refer to **p. 116-117**

■ Recommended finishes for different enviroments

❍ Recommended ◆ Possible	GS	EZ	EZ+	GC	DC	304L	316L
Internal installation, normal environment	❍	❍					
External installation, urban environment	◆	◆	◆	❍	❍		
Temporary external installation during construction phase	◆	◆	❍				
Chemical industries, nitrate explosives, photography, decoration				◆	◆		❍
Marine, harsh, sulphurous (weak concentration) environments				◆	◆		❍
Acid or alkaline environments		◆		◆	◆	❍	◆
Food production environment					❍	❍	
Halogen environment						◆	❍

Typical atmospheric environments in relation to suitability of finishes

■ Colour code identification

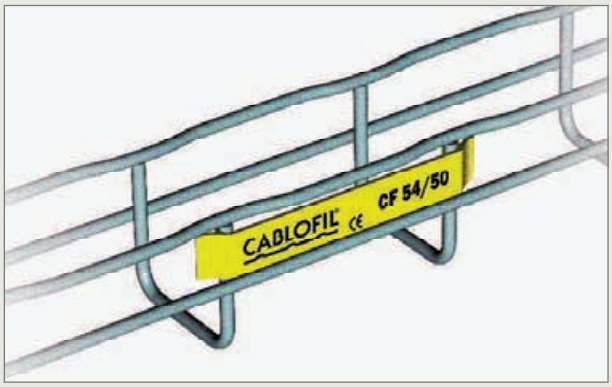


The surface treatment can be indentified by a colour coded clip
Each colour corresponds with a particular finish, i.e. yellow clip = EZ

■ Key to symbols

Symbol	Description
	Fixing without nuts and bolts
	Fixing with nuts and bolts
	Fast assembling
	Patented fast assembling system (FAS)
	Patented
	Patented safety edge
P1500	Supports at 1·5 m span
P2000	Supports at 2·0 m span
W	Width
L	Length
H	Height
F CEI 61.537 NORM	Practical safety load in daN
	Coupling

straight lengths – CF30

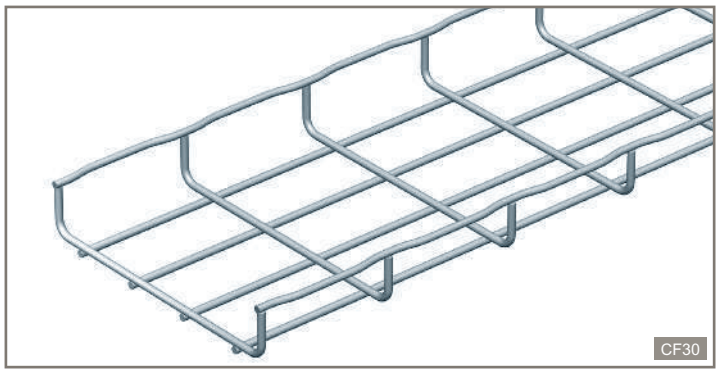


Loading graphs **p. 38**
Dimensions and technical information **p. 38**

NOTE : please use Cat. No. when placing your order

CF30 – straight lengths (3 m)

30 mm 50 mm → 600 mm 3 m

Pack	Cat. Nos. EZ	Cat. Nos. GC		Width (mm)
1	CM000011	CM000013	CF30/50[1]	50
1	CM000021	CM000023	CF30/100	100
1	CM000031	CM000033	CF30/150	150
1	CM000041	CM000043	CF30/200	200
1	CM000051	CM000053	CF30/300	300
1	CM000801	–	CF30/400	400
1	CM000831	–	CF30/450	450
1	CM000811	–	CF30/500	500
1	CM000851	–	CF30/600	600



CF 30 stainless steel – straight lengths (3 m)

30 mm 50 mm → 300 mm 3 m

Pack	Cat. Nos. 304L	Cat. Nos. 316L		Width (mm)
1	CM000018	CM000014	CF30/50[1]	50
1	CM000028	CM000024	CF30/100	100
1	CM000038	CM000034	CF30/150	150
1	CM000048	CM000044	CF30/200	200
1	CM000058	CM000054	CF30/300	300

1 : = No safety edge


Key :

- EZ – Electrogalvanising after manufacture
- EZ+ – Organically coated electrogalvanised after manufacture
- GC – Hot dip galvanised after manufacture
- 304L – Stainless steel 304L
- 316L – Stainless steel 316L

For detailed information related to finishes, refer to **p. 116-117**

All dimensions (mm) are nominal

straight lengths – CF54

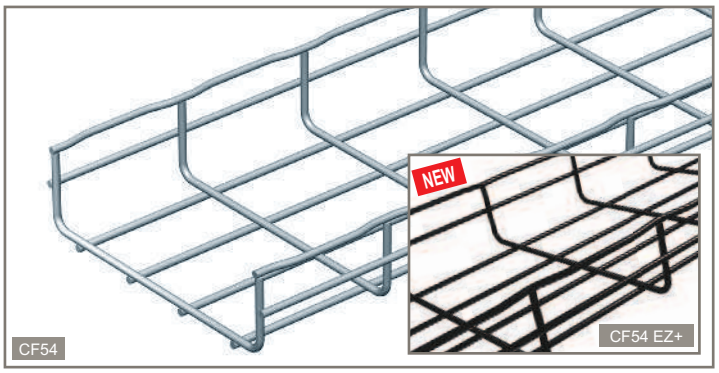


Loading graphs **p. 39**
Dimensions and technical information **p. 39**

NOTE : please use Cat. No. when placing your order

CF54 – straight lengths (3 m)

54 mm 50 mm → 600 mm 3 m

Pack	Cat. Nos. EZ	Cat. Nos. GC		Width (mm)
1	CM000061	CM000063	CF54/50	50
1	CM000071	CM000073	CF54/100	100
1	CM000081	CM000083	CF54/150	150
1	CM000091	CM000093	CF54/200	200
1	CM000101	CM000103	CF54/300	300
1	CM000201	CM000203	CF54/400	400
1	CM000251	CM000253	CF54/450	450
1	CM000301	CM000303	CF54/500	500
1	CM000401	CM000403	CF54/600	600



CF54 stainless steel – straight lengths (3 m)

54 mm 50 mm → 600 mm 3 m

Pack	Cat. Nos. 304L	Cat. Nos. 316L		Width (mm)
1	CM000068	CM000064	CF54/50	50
1	CM000078	CM000074	CF54/100	100
1	CM000088	CM000084	CF54/150	150
1	CM000098	CM000094	CF54/200	200
1	CM000108	CM000104	CF54/300	300
1	CM000208	CM000204	CF54/400	400
1	CM000258	CM000254	CF54/450	450
1	CM000308	CM000304	CF54/500	500
1	CM000408	CM000404	CF54/600	600

CF54 EZ+ – straight lengths (3 m)

NEW

54 mm 50 mm → 600 mm 3 m

Colour : black

Pack	Cat. Nos. EZ+		Width (mm)
1	CM000062	CF54/50	50
1	CM000072	CF54/100	100
1	CM000082	CF54/150	150
1	CM000092	CF54/200	200
1	CM000102	CF54/300	300
1	CM000202	CF54/400	400
1	CM000252	CF54/450	450
1	CM000302	CF54/500	500
1	CM000402	CF54/600	600