Product Data Sheet

GW42208

Seria 42 RV




Watertight enclosure for emergency use and special applications with rail DIN. It is available in red RAL 3000 or grey RAL7035 colours. Thanks to the emergency hammer, available as an acessory, sealable mask and halogen free materials are ideally suited for applications in areas open to public.

Prąd znamionowy (A)	125	Klasa Izolacji	II
Kolor	Szary RAL 7035	Śred. zewn. LxHxD (mm)	180x180x100
Ochrona IP	IP55	Montaż	Montaż naścienny
Materiał	Technopolimerowy	Odporność na wstrząsy	IK08
Prąd cewki (V)	400	Próba rozżarzonym drutem	650 °C
Temperatura robocza	-25 +60 °C	Rodzaj materiału	Bezhalogenowe zgodnie z normą EN 50267-2-2
Electrocod	0321	Twardość kulkowa	70 °C
Norma	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Izolacja wyjściowe	750 V
Moc rozpraszalna (W)	18	Liczba modułów EN 50022	8

DIMENSIONAL

TECHNICAL SYMBOLOGY

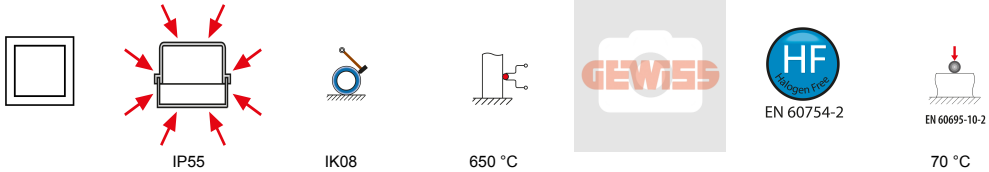

STANDARDS/APPROVALS