SIEMENS

Product data sheet 5TE5802



Similar to image

PHASE SIGNALL.,
D=70MM 3LAMPS 230V 3 X GREEN

Technical data:		
Design type		5TE5 light indicators
Type, explanations		Light indicators for max. cable length up to 5 m
Type, explanations / additionally		with 3 green lamps
Nature of fluorescent material		glow lamp
type of voltage		AC
Mounting depth	mm	64
Number of pitch units for width		1
Operating voltage / rated value		
• minimum	V	230
• maximum	V	230
Active power / for filament lamp load / maximum	W	0.4
Protection class IP		IP20
Holder design / for fluorescent material		others
Color / of the lens		others
Connection terminals		
• ± screw (Pozidriv)		1
• max torque	N·m	1.2
Climatic resistance / at 95 % relative humidity acc. to DIN 50015	°C	45

subject to modifications
© Copyright Siemens AG 2013

Permissible ambient temperature		-5 till +40°C
Rated operational voltage Ue / AC / maximum		230V (for different voltages see 5TG8 lamps)
Rated power loss Pv / contact per pole		see 5TG8 lamps
Conductor cross sections		
• flexible, with end sleeve		1 till 6 mm²
• rigid		1.5 to 6mm²

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
GOST VDE	EG-Konf.	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs


Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5TE5802/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE5802

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

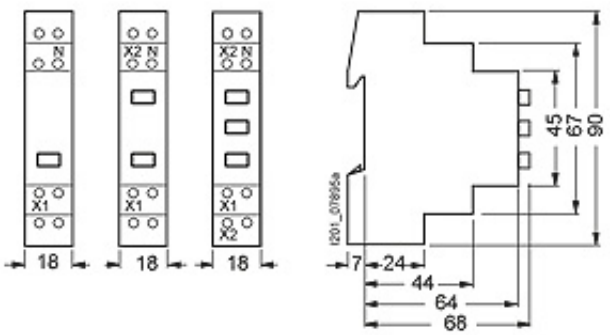

last change: Oct 2, 2012

© Copyright Siemens AG 2013