
Cable tray MKS

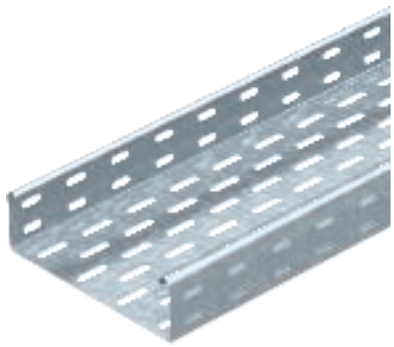

Type	Width mm	Plate thickness mm	Pack. m	Weight kg/100 m	Item No.
MKS 605 FS	50	1	3	149,000	**6055052**
MKS 610 FS	100	1	3	173,000	**6055109**
MKS 615 FS	150	1	3	210,000	**6055141**
MKS 620 FS	200	1	3	238,600	**6055206**
MKS 630 FS	300	1	3	304,600	**6055303**
MKS 640 FS	400	1	3	368,000	**6055400**
MKS 650 FS	500	1	3	433,500	**6055508**
MKS 660 FS	600	1	3	498,000	**6055524**
MKS 605 FT	50	1	3	151,670	**6055516**
MKS 610 FT	100	1	3	190,100	**6055532**
MKS 615 FT	150	1	3	225,000	**6055559**
MKS 620 FT	200	1	3	261,000	**6055575**
MKS 630 FT	300	1	3	331,000	**6055613**
MKS 640 FT	400	1	3	402,000	**6055664**
MKS 650 FT	500	1	3	510,000	**6055699**
MKS 660 FT	600	1	3	545,670	**6055710**

St Steel /m


FS Strip-galvanised FT Hot-dip galvanised

MKS 60 = medium-duty cable tray system with a side height of 60 mm. FS version includes RV 60 straight connector set.

Magnetic shield insulation without cover 20 dB, with cover 50 dB.


Dimensions

Type	Length mm	Width mm	Useful cross-section cm²
MKS 605 FS	3000	50	28
MKS 610 FS	3000	100	58
MKS 615 FS	3000	150	88
MKS 620 FS	3000	200	118
MKS 630 FS	3000	300	178
MKS 640 FS	3000	400	238
MKS 650 FS	3000	500	298
MKS 660 FS	3000	600	358

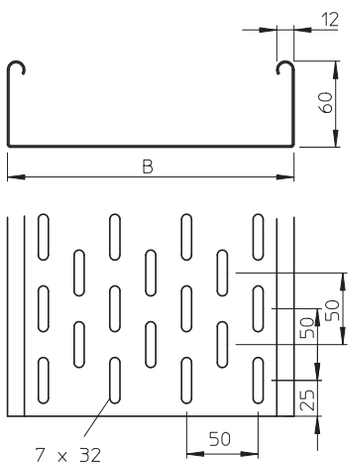

Load

Type	1.5 m kN/m	2.0 m kN/m	2.5 m kN/m
MKS 605 FS	1.5	1	0.5
MKS 610 FS	1.5	1	0.5
MKS 615 FS	1.5	1	0.5
MKS 620 FS	1.5	1	0.5
MKS 630 FS	1.5	1	0.5
MKS 640 FS	1.5	1	0.5
MKS 650 FS	1.5	1	0.5
MKS 660 FS	1.5	1	0.5

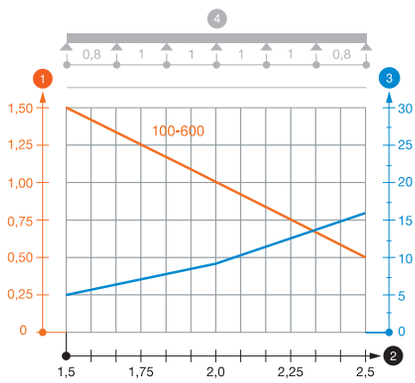

Load diagram, cable tray, type MKS 60

1 Permitted cable tray/ladder load in kN/m without man load

2 Support width in m

3 Rail bend in mm at permitted kN/m

4 Load scheme during testing

— Load curve with cable tray/ladder width in mm

— Strut bend curve according to support width

Always indicate the item number when ordering.