Simply plugged in.

Never leave without them.

Universal screwless terminal

The easiest way to connect or disconnect cables and wires: OBO‘s new screwless connection terminals for flexible and rigid cables.

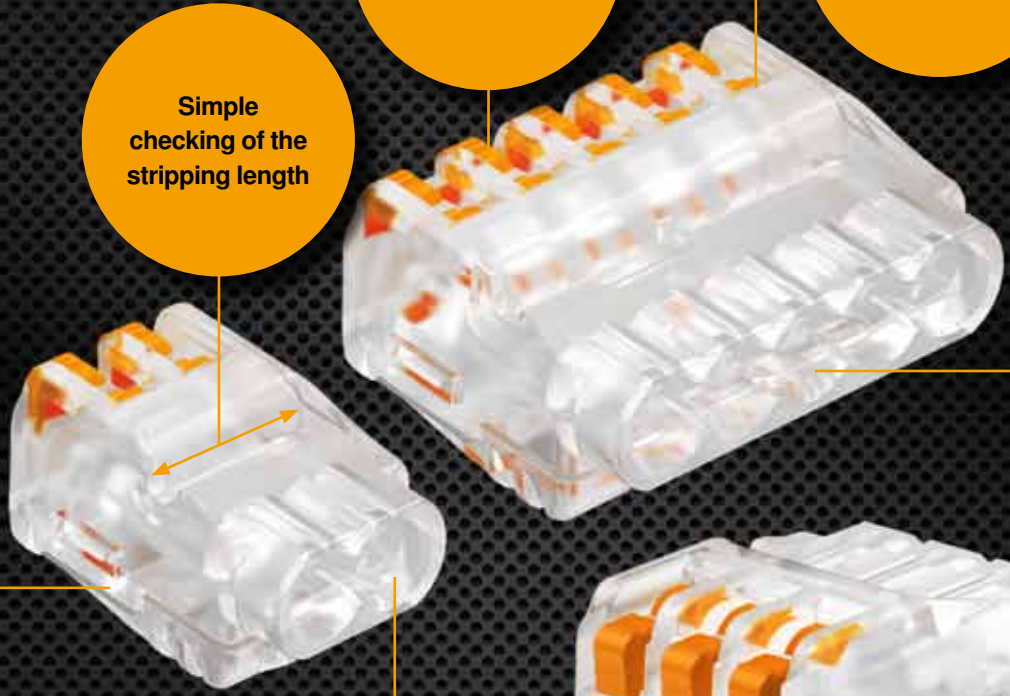

Simple connection and releasing

Test opening

Simple checking of the stripping length

For flexible and rigid conductors

Tested according to EN 60998

Connection cross-sections of 0.2 up to 2.5 mm²

Insert rigid conductors without opening the release lever

OBO BETTERMANN Customer Service
Tel.: +49 (0) 23 73-89-1500 · e-Mail: export@obo.de
www.obo-bettermann.com

OBO BETTERMANN

THINK CONNECTED.

The new universal screwless terminals



Technical data

Nominal cross-section	0.2 mm² - 2.5 mm² multi-wire conductors or single-wire conductors
Nominal voltage	450 V
Nominal current	24 A
Stripping length	9 mm (+1 mm)
Test opening	Phase tester and testing pin (max. Ø 2 mm) easily accessible on the top side of the terminal
Max. approved ambient temperature according to EN 60998	85°C

Technical data UL (USA)

Nominal voltage	600 V
Nominal current	20 A
Clamping range	AWG 14-24
Max. approved ambient temperature	120°C



Universal screwless terminal, 2-pin

Type	Colour	Shipping box pcs		Pack. pcs	Weight kg/100 pcs.	Item No.
61 225 FL	Transparent	2000		100	0,200	**2054 45 0**

PC Polycarbonate /100 pc.



Universal screwless terminal, 3-pin

Type	Colour	Shipping box pcs		Pack. pcs	Weight kg/100 pcs.	Item No.
61 325 FL	Transparent	1500		75	0,270	**2054 45 4**

PC Polycarbonate /100 pc.



Universal screwless terminal, 5-pin

Type	Colour	Shipping box pcs		Pack. pcs	Weight kg/100 pcs.	Item No.
61 525 FL	Transparent	1000		50	0,410	**2054 45 8**

PC Polycarbonate /100 pc.

© OBO BETTERMANN Item no. 9151933 04/2014 EN

OBO BETTERMANN Customer Service
Tel.: +49 (0)23 73-89-1500 · e-Mail: export@obo.de
www.obo-bettermann.com