

En vogue. The radiant accessory for your home.
XLED slim

Both floodlight and luminaire: the elegant cross-over solution for the outwardly presented sides of a building. The economical sensor-switched XLED slim floodlight puts the focus on lighting. This stylish lighting solution captivates with its elegant design and automatically provides attractive illumination for building entrances and pathways. The XLED slim makes attractive lighting statements on building facades that not only look good but also ensure that you get home safely thanks to the integrated sensor. An elegant statement of modern, timeless taste.

LED	10.5w					
30 years (Ø 4,5 h/day)	660 lm 62,9 lm/W	4000 K neutral-white	160°	max. 8 m	2 - 1000 Lux	2 sec - 70 min

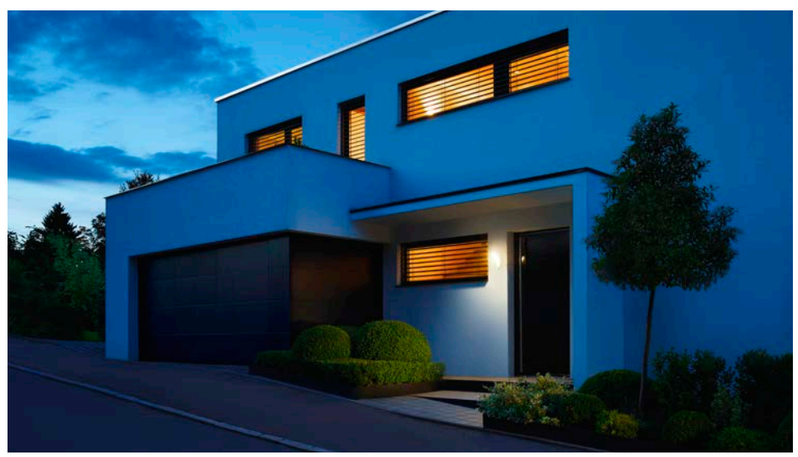

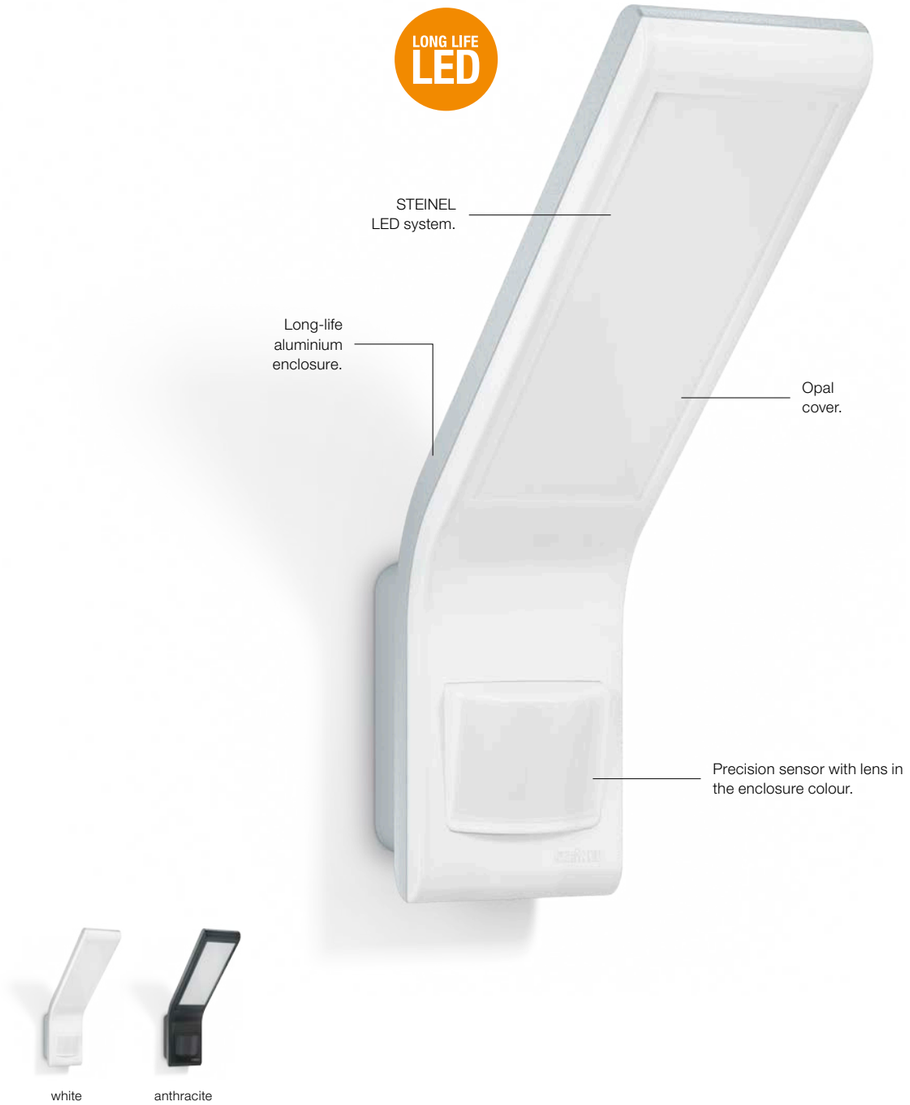

white anthracite

Technical specifications
Dimensions: (H x W x D) 241 x 66 x 201 mm
Power supply: 230–240 V, 50 / 60 Hz
Sensor type: Passive infrared
Output: 10.5 W
Brightness: 660 lm
Efficiency: 62.9 lm/W
Colour temperature: 4000 K / SDCM 3
Colour rendering: Ra ≥ 85
LED life expectancy: 50,000 h (L70B10 to LM80)
LED cooling system: Active and Passive Thermo Control
Angle of coverage: 160°
Reach: max. 8 m
Floodlight adjustment range: +/- 30° swivelling with adapter
Twilight setting: 2 - 1000 lux
Time setting: 2 sec - 70 min
IP rating: IP 44
Protection class: I
Material: UV-resistant plastic with aluminium heat sink
Temperature range: - 20 to + 40°C

XLED slim
EAN white 4007841 012083
EAN anthracite 4007841 012076