# Heat-shrink caps TZK type

## FEATURES & BENEFITS

- -
- -

Stosowane do uszczelniania i ochrony końców kabli. Pokryte wewnątrz klejem termotopliwym. Obkurczanie należy rozpocząć od ślepego końca.



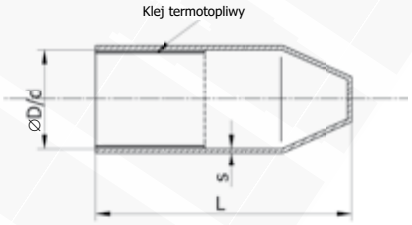


## MECHANICAL DATA

| | |
|---|---|
| **Material** | cross linked polyolefin with hot melt adhesive |
| **Recommended shrinking temperature [°C]** | 120 ÷ 200 |
| **Working temperature [°C]** | -40 ÷ +100 |
| **Shrinkage factor** | 3:1 |
| **Colour** | black |

## ELECTRICAL DATA

| | |
|---|---|
| **Breakdown strength, above [kV/mm]** | 12 |

| Type | Index Ergom | Length in delivery L [mm] | Inside diameter in delivery state - D [mm] | Internal diameter full shrinkage - d [mm] | Wall thickness on full shrinkage - s [mm] | Available packages [szt.] |
|---|---|---|---|---|---|---|
| **TZK 10/4** | E05ME-01050100101 | 58 | 12 | 4 | 2,3 | 1 |
| **TZK 10/4 (10 SZT./PCS)** | E05ME-01050100103 | 58 | 12 | 4 | 2,3 | 10 |
| **TZK 14/4** | E05ME-01050100201 | 58 | 14 | 4 | 2,3 | 1 |
| **TZK 14/4 (10 SZT./PCS)** | E05ME-01050100203 | 58 | 14 | 4 | 2,3 | 10 |
| **TZK 16/8** | E05ME-01050100301 | 85 | 16 | 7,9 | 2,9 | 1 |
| **TZK 16/8 (10 SZT./PCS)** | E05ME-01050100303 | 85 | 16 | 7,9 | 2,9 | 10 |
| **TZK 18/6** | E05ME-01050100401 | 20 | 18 | 6 | 2,1 | 1 |
| **TZK 18/6 (10 SZT./PCS)** | E05ME-01050100403 | 20 | 18 | 6 | 2,1 | 10 |
| **TZK 21/6** | E05ME-01050100501 | 20 | 21 | 6 | 2,1 | 1 |
| **TZK 21/6 (10 SZT./PCS)** | E05ME-01050100503 | 20 | 21 | 6 | 2,1 | 10 |
| **TZK 23/8** | E05ME-01050100601 | 75 | 25 | 8 | 2,5 | 1 |
| **TZK 23/8 (10 SZT./PCS)** | E05ME-01050100603 | 75 | 25 | 8 | 2,5 | 10 |
| **TZK 33/15** | E05ME-01050100701 | 75 | 35 | 11 | 2,5 | 1 |
| **TZK 33/15 (10 SZT./PCS)** | E05ME-01050100703 | 75 | 35 | 11 | 2,5 | 10 |
| **TZK 40/15** | E05ME-01050100801 | 106 | 40 | 14,6 | 3,5 | 1 |
| **TZK 40/15 (10 SZT./PCS)** | E05ME-01050100803 | 106 | 40 | 14,6 | 3,5 | 10 |
| **TZK 52/25** | E05ME-01050100901 | 125 | 55 | 25 | 3,8 | 1 |
| **TZK 52/25 (10 SZT./PCS)** | E05ME-01050100903 | 125 | 55 | 25 | 3,8 | 10 |
| **TZK 63/25** | E05ME-01050100951 | 125 | 63 | 25 | 3,8 | 1 |
| **TZK 63/25 (10 SZT./PCS)** | E05ME-01050100953 | 125 | 63 | 25 | 3,8 | 10 |
| **TZK 70/25** | E05ME-01050101001 | 115 | 70 | 24,2 | 3,5 | 1 |
| **TZK 70/25 (10 SZT./PCS)** | E05ME-01050101003 | 115 | 70 | 24,2 | 3,5 | 10 |
| **TZK 75/35** | E05ME-01050101021 | 140 | 75 | 35 | 4,0 | 1 |
| **TZK 75/35 (10 SZT./PCS)** | E05ME-01050101023 | 140 | 75 | 35 | 4,0 | 10 |
| **TZK 90/45** | E05ME-01050101101 | 160 | 100 | 45 | 4,0 | 1 |
| **TZK 90/45 (10 SZT./PCS)** | E05ME-01050101103 | 160 | 100 | 45 | 4,0 | 10 |
| **TZK 120/45** | E05ME-01050101201 | 200 | 120 | 45 | 4,0 | 1 |
| **TZK 120/45 (10 SZT./PCS)** | E05ME-01050101203 | 200 | 120 | 45 | 4,0 | 10 |
| **TZK 120/60** | E05ME-01050101221 | 155 | 130 | 60 | 4,6 | 1 |
| **TZK 120/60 (10 SZT./PCS)** | E05ME-01050101223 | 155 | 130 | 60 | 4,6 | 10 |

Date of publication: 15/2/2018

Graphic project, pictures and all technical data and descriptions in this catalogue are protected by Polish and international copyright laws. Names and logos used in the content of this catalogue may be trademarks, for which ZAE Ergom Sp. z o.o. has exclusive protection rights. ZAE ERGOM reserves the right for changes in the assortment and parameters of its products.