

Clicktronic Casual

DisplayPort cable

audio/video connection for HD- and 3D content

- mechanical locking of the DisplayPort plug prevents loose connections
- pure copper conductor and 2-way shielding for clear signal quality
- supports a maximum resolution of up to 2560 x 1600 p
- 24 carat gold-plated contacts for minimum transmission resistance

1.00 m	70710	Retail Box
2.00 m	70711	Retail Box
3.00 m	70712	Retail Box
5.00 m	70713	Retail Box
7.50 m	70714	Retail Box
10.00 m	70715	Retail Box
15.00 m	70716	Retail Box
20.00 m	70717	Retail Box





Goobay

DisplayPort adapter cable 1.3

DisplayPort male > DisplayPort male

- for connecting monitors, laptops, projectors or graphic cards
- plug with lock for secure connections
- gold contacts for enhanced signal transmission
- supports 4K (3840×2160) at 120Hz and 24 bit colour depth
- supports 5K (5120x2880) at 60Hz and 30 bit colour depth
- supports 8K (7680x4320) at 30Hz and 24 bit colour depth
- supports HDCP 2.2

0.50 m	76790	Bulk
1.00 m	76791	Bulk
1.50 m	76792	Bulk
2.00 m	76793	Bulk

4K HDTV Resolution



Goobay

DisplayPort connector cable 1.2

DisplayPort male > DisplayPort male

- for connecting monitors, laptops, projectors or graphic cards
- plug with lock for secure connections
- gold contacts for enhanced signal transmission
- supports 3D, 4K*2K@24 Hz

1.00 m	68798	Bulk
2.00 m	65923	Bulk
3.00 m	65924	Bulk
5.00 m	65925	Bulk




Goobay

DisplayPort connector cable 1.1

DisplayPort male > DisplayPort male

- for connecting monitors, laptops, projectors or graphic cards
- plug with lock for secure connections
- gold contacts for enhanced signal transmission
- max. resolution: 3840 × 2160

1.00 m	51952	Bulk
2.00 m	51953	Bulk
3.00 m	51954	Bulk
5.00 m	51955	Bulk

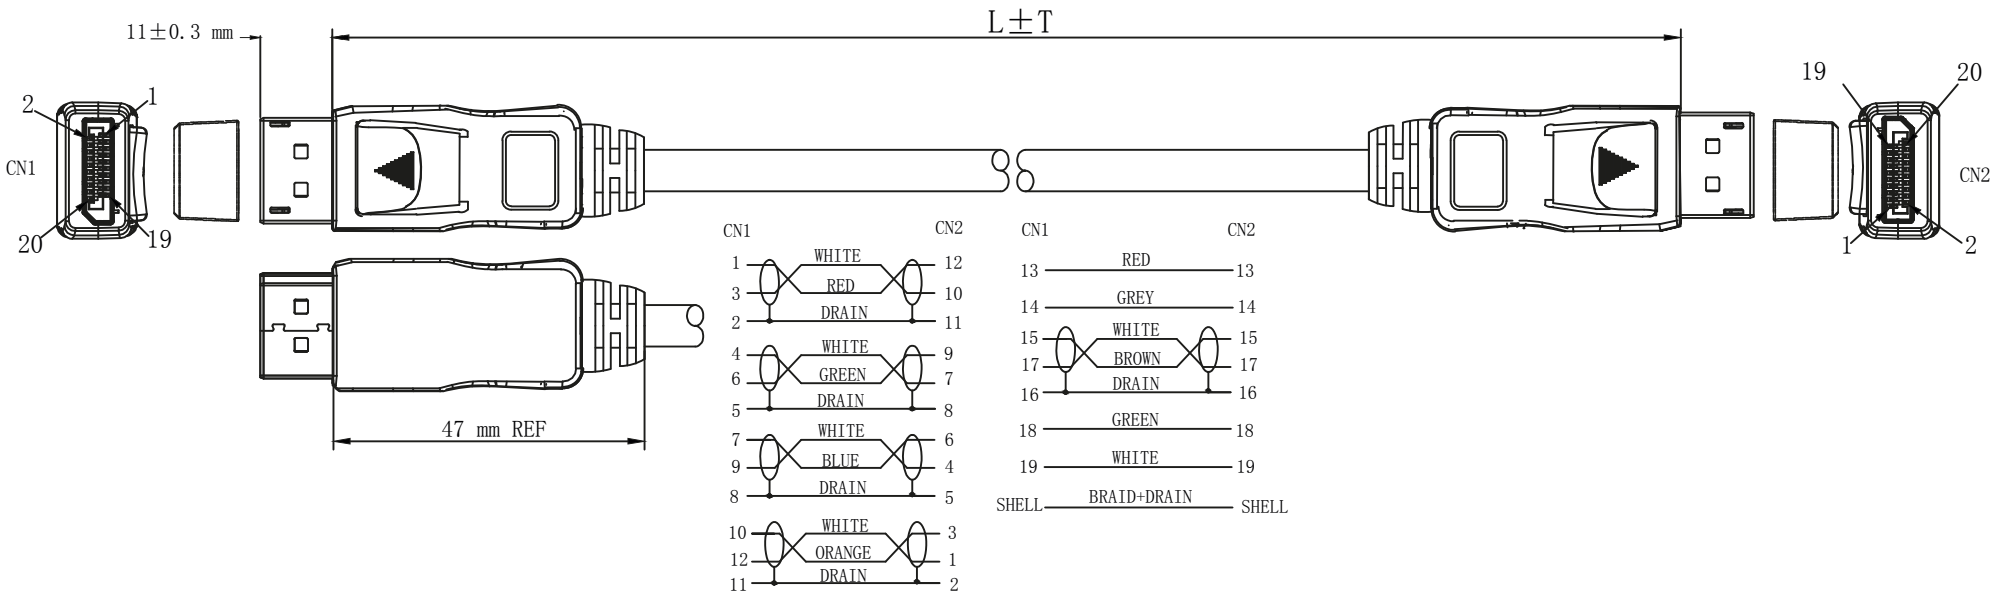



Nr. / No.	Länge / Length (m)
76790	500±15
76791	1000±20
76792	1500±30
76793	2000±30
38538	2000±30
55483	3000±50
55482	3000±50

DisplayPort 1.4 Kabel			*DisplayPort 1.4 Cable*		
- Anschlüsse:	2x DP-Stecker (20-Pin)		*- Connectors:*	*2x DP plug (20-Pin)*	
- Kabeltyp:	Rundkabel;	AWM Style 20276 E148000	*- Cable type:*	*Round cable;*	*AWM Style 20276 E148000*
- Material:	Innenleiter:	#30; BC	*- Material:*	*Inner cond.:*	*#30; BC*
	Mantel:	LD-PE/PVC		*Sheath:*	*LD-PE/PVC*
	Stecker:	ABS		*Plug:*	*ABS*
	Kontakte:	vergoldet		*Contacts:*	*gold-plated*
- Schirmung:	2-fach		*- Shielding:*	*2-times*	
- Knickschutz:	beidseitig		*- Kink Protect.:*	*both sides*	
- Übertragung:	max. 32,4 Gbit/s		*- Data transfer:*	*max. 32.4 Gbps*	
- Auflösung:	max. 8K Ultra HD2 4320p (30 Hz)		*- Resolution:*	*max. 8K Ultra HD2 4320p (30 Hz)*	
- Isolationswid.:	10 MOhm @ 300 V min.		*- Insulation res.:*	*10 MOhm @ 300 V min.*	
- Kontaktwid.:	3 Ohm max.		*- Contact res.:*	*3 Ohm max.*	
- Konformität:	RoHS		*- Conformity:*	*RoHS*	
- Betrieb:	-10~+60 °C		*- Operation:*	*-10~+60 °C*	
- Lagerung:	-20~+75 °C		*- Storage:*	*-20~+75 °C*	

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	08.12.2017	tf	MMK 648 (DisplayPort 1.4) G	
04.06.2018	tf	gepr.:	08.12.2017	tf		
		Norm:			Zeichnungs-Nr.:	von
		Änderungen vorbehalten / *Subject to change*				