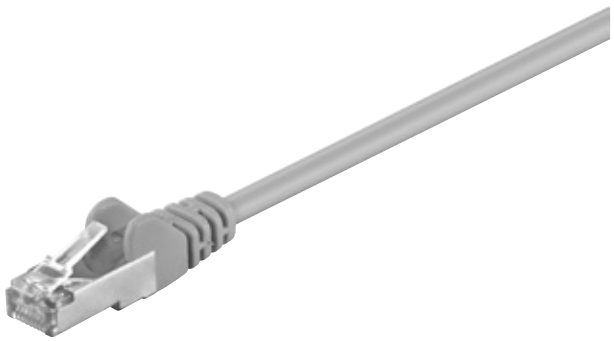

Outer sheath material	PVC
Cable sheath diameter (approx.)	5.5 mm
max. bandwidth	100 MHz
Cable type	round cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	26/7 stranded
Shielding class	SF/UTP
Number of shieldings	2 x
Type 1, shielding	foil (aluminum)
Type 2, shielding	braid (alu) overall shield
Connection, type	RJ45 male (8P8C)
Connection, shielding	yes
Latch protection	both sides

Goobay

CAT 5e patchcable, SF/UTP

CCA

- double shielded LAN/network cable to connect network components with 2 x RJ45 connectors
- outer shield: braiding + foil screening
- with 3µ gold plated PINs
- with length indication on the slimline strain relief
- with latch protection
- pair-sequence acc. to EIA/TIA 568B



Cable length	grey	black	white	blue	orange	yellow	green	magenta	red	violet
	Bulk	Bulk	Bulk	Bulk	Bulk	Bulk	Bulk	Bulk	Bulk	Bulk
0.25 m	95206	95211	95213	95203	95209	95205	95207	95208	95210	95212
0.50 m	50143	68665	93478	68053	93444	68064	68042	93410	68031	93512
1.00 m	50144	68666	93479	68054	93445	68065	68043	93411	68032	93513
1.50 m	95546	95551	95553	95543	95549	95545	95547	95548	95550	95552
2.00 m	50145	68669	93482	68055	93448	68066	68044	93414	68033	93516
3.00 m	50146	68671	93484	68056	93450	68067	68045	93416	68034	93518
5.00 m	50147	68673	93486	68057	93452	68068	68046	93418	68035	93520
7.50 m	50148	68675	93488	68058	93454	68069	68047	93420	68036	93522
10.00 m	50149	68667	93480	68059	93446	68070	68048	93412	68037	93514
15.00 m	50877	68668	93481	68060	93447	68071	68049	93413	68038	93515
20.00 m	50878	68670	93483	68061	93449	68072	68050	93415	68039	93517
25.00 m	95624	95629	95631							
30.00 m	50879	68672	93485					93417		93519
50.00 m	50880	68674	93487				68052			

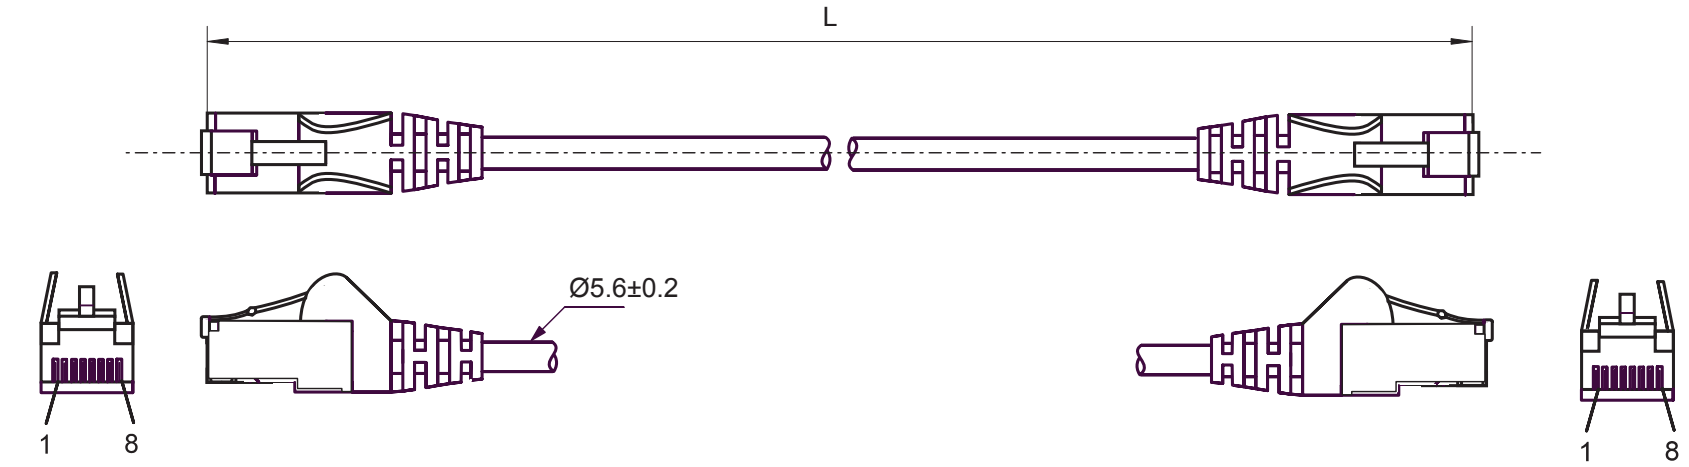



Nr. / No.	Länge / Length (m)
95206	0.25
50143	0.50
50144	1.00
95546	1.50
50145	2.00
50146	3.00
50147	5.00
50148	7.50
50149	10.00
50877	15.00
50878	20.00
95624	25.00
50879	30.00
50880	50.00

- CAT 5e Netzwerkkabel; lose Ware
- Stecker: RJ45; 8P8C mit vergoldeten Kontaktflächen
- Paarfolge nach EIA/TIA 568, PIMF
- angespritzter Knickschutztülle mit Längenangabe
- Standard: Cat 5e: 125MHz
- Schirmung: SF/UTP folien- und geflechtgeschirmt
- Innenleiter: 4x2xAWG 26/7 CCA
- Isolierung: PVC
- Wellenwiderstand: 100Ohm
- RoHS-konform

- CAT 5e Network cable; bulk
- Plug: RJ45; 8P8C with gold plated contacts
- pair-sequence acc. to EIA/TIA 568, PIMF
- molded strain relief with meter mark
- Standard: Cat5e: 125MHz
- Shielding: SF/UTP foil and braiding shielded
- Inner conductor: 4x2xAWG 26/7 CCA
- Insulation: PVC
- Impedance: 100Ohm
- RoHS compliant

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	16.09.2014	tf	CAT 5 SF/UTP GRAU	
		gepr.:	16.09.2014	tf		
		Norm:			Zeichnungs-Nr.:	von
		Änderungen vorbehalten / Subject to change				