
LAPP GROUP	**DATA SHEET**	65500300
	SILVYN® KLICK-RH	valid from : 11.01.2008

The SILVYN® KLICK-RH one-piece conduit holder for SILVYN® RILL with through hole for attachment by screws, rib dumping for strain relief and hinge mounted cover. For simple rapid installation, can be stacked or arranged in a line and can be used in C-profile rails.

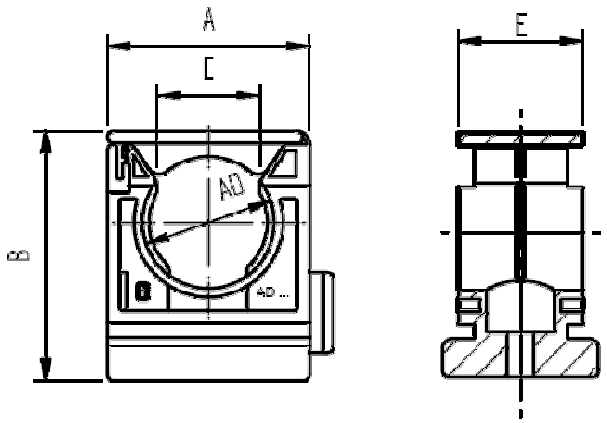

Dimensiontable:

Part No.	SILVYN® KLICK-RH	Ø AD	A	B	C	E
6550 0300	PG 7	10,0	21,67	23,7	8,0	20
6550 0310	PG 9	13,0	26,00	29,0	8,5	20
6550 0320	PG 11	15,8	26,00	29,0	10,0	20
6550 0330	PG 13,5	18,5	32,5	37,0	12,5	20
6550 0340	PG 16	21,2	32,50	37,0	16,6	20
6550 0350	PG 21	28,5	43,3	50,4	20,0	20
6550 0360	PG 29	34,5	43,3	50,4	25,5	20
6550 0370	PG 36	42,5	65,00	77,0	30,0	20
6550 0380	PG 48	54,5	65,00	77,0	38,0	20

Material:	Polyamide PA
Temperature range:	-40°C up to +105°C
Resistance:	fuels, mineral oil, , fat,, alkalises, glycol, acids bases common solvents
Technical Characteristics:	tensile strength 50 – 80 N/mm² Stress-E-module 1250 – 3700 N/mm²

Approvals:

File Nr. E308201

Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.