SIEMENS

Data sheet 5ST3773-0

compact Pin Busbar, 10mm2 connection: 3p/N compact device 1-pole touch protected 1000mm cuttable



Model	
Product brand name	SENTRON
General technical data	
Phase number	3
Electricity	
Continuous current / rated value	63 A
Main circuit	
Operating voltage / rated value / maximum	230 V
Suitability	
Suitability for interaction	
• Devices with auxiliary switch	No
• Devices with N conductor	Yes
Product details	
Product feature / insulated	Yes
Number	
Number of devices / suitable for fitting	60

Subject to change without notice
© Copyright Siemens

Connections

Type of electrical connection	Pin

Mechanical Design

Module width	1 mm
Height	13 mm
Length	1 060 mm
Net weight	679 g

Certificates

Declaration of Conformity

EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3773-0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5ST3773-0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3773-0

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

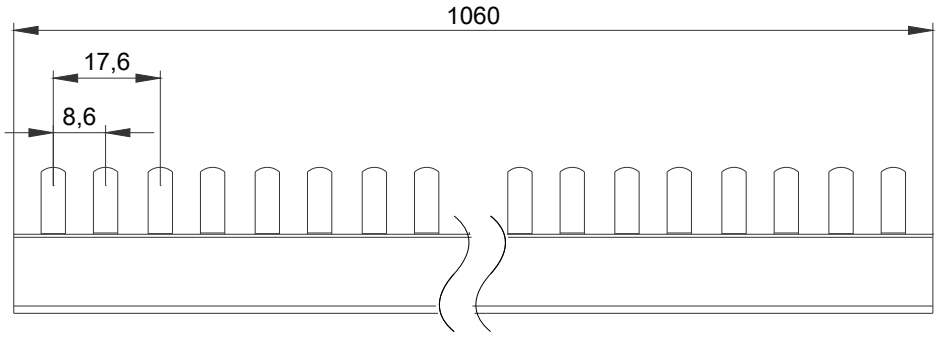



5ST3773-0

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens