
Technical data sheet
Cable gland systems, brass

Cable gland, metric thread

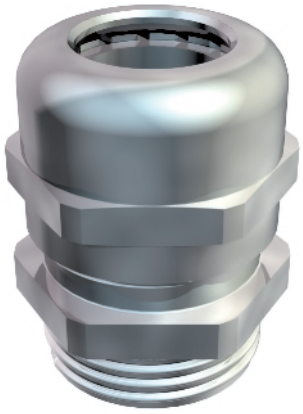

With metric connecting thread to IEC 423, robust cap-nut cable gland with large sealing area. Strain relief, wringing protection and tightness over the whole clamping area. Neoprene sealing ring. Polyamide terminal insert. With pre-mounted O sealing ring on connection thread, VDE-tested to DIN EN 50262, protection rating IP68 at 5 bar for 1 hr, max. permitted ambient temperature -20 - 100°C.
* Prices according to DEL notation.

Type	Thread	Dimension L1 mm	Pack. pcs	Weight kg/100 pcs.	Item No.
V-TEC VM12 MS	M12 x 1,5	5	50	1,200	**2086018**
V-TEC VM16 MS	M16 x 1,5	5	50	1,640	**2086024**
V-TEC VM20 MS	M20 x 1,5	6	25	3,140	**2086030**
V-TEC VM25 MS	M25 x 1,5	7	25	4,260	**2086036**
V-TEC VM32 MS	M32 x 1,5	8	20	7,160	**2086042**
V-TEC VM40 MS	M40 x 1,5	8	5	12,240	**2086048**
V-TEC VM50 MS	M50 x 1,5	9	5	22,700	**2086054**
V-TEC VM63 MS	M63 x 1,5	10	5	30,300	**2086060**

CuZn Brass

N Nickel-plated

Dimensions

