MRK SERIES SCREWED TYPE EARTH RAIL TERMINAL BLOCKS





MTK 2,5

Order No: 1291

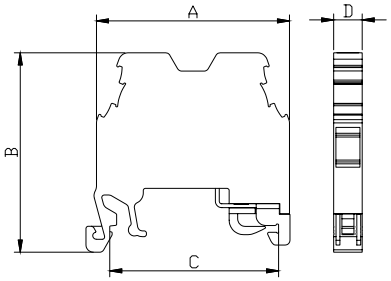

Dimensions (mm)	A	B	C	D
	40	41,3	34,5	5,9

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
The Foot Which Contact to the Rail	Brass
Temp.	-40 ºC, +140 ºC
Cable Strip L.	9 mm
Torque	0,4 Nm

DATA	TSE / CE
Voltage	750 V
Section	2,5 mm²
Norm	EN-60947-7-2
Pcs	100

ACCESSORIES	
Stopper	1202,1222,1212
Group Sticker	1232
Marking	9540 / 9770 / 4440 / 4442 7301





MTK 4

Order No: 1293

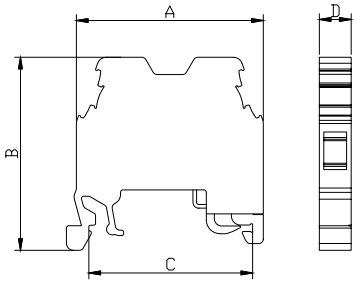

Dimensions (mm)	A	B	C	D
	40	41,3	34,5	6,8

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
The Foot Which Contact to the Rail	Brass
Temp.	-40 ºC, +140 ºC
Cable Strip L.	9 mm
Torque	0,5 Nm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Section	4,0 mm²	10 AWG
Norm	EN-60947-7-2	UL 1059
Pcs	100	

ACCESSORIES	
Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540 / 4390 7301