
OPK SERIES PUSH-IN TYPE TERMINAL BLOCKS

PUSH IN



OPK - 2,5

Order No: 1262

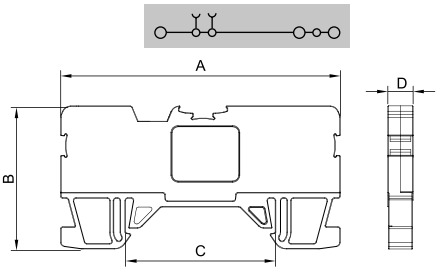

Dimensions (mm)	A	B	C	D
	64,8	33,0	34,5	5,9


MATERIAL	
Body	PA6.6
Bridge	Copper
Orange Button	PA6.6
Spring	Stainless Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS		
COLOUR	Order No.	Pcs.
GREY	1262	50
CREAM	1263	50
BLACK	1264	50
BLUE	1265	50
BROWN	1266	50
RED	1267	50
YELLOW	1268	50
GREEN	1269	50


ACCESSORIES			
Cross Connection 	Order No.	Section	Pcs.
	1925	2,5 / 2	100
	1926	2,5 / 3	100
	1927	2,5 / 4	75
	1928	2,5 / 10	30
	1929	2,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4440 / 4442 / 9540 / 7301		

PUSH IN

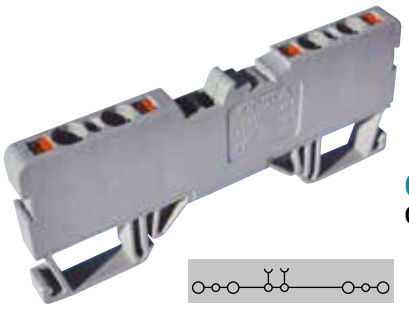

OPK - 2GC 2,5

Order No: 1252

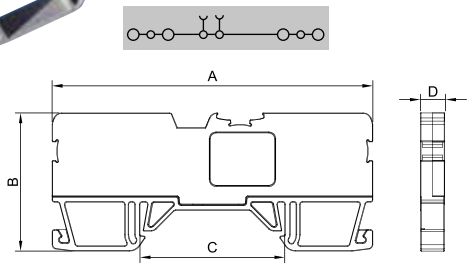

Dimensions (mm)	A	B	C	D
	77,3	33,3	34,5	5,9

MATERIAL	
Body	PA6.6
Bridge	Copper
Orange Button	PA6.6
Spring	Stainless Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS		
COLOUR	Order No.	Pcs.
GREY	1252	50
CREAM	1253	50
BLACK	1254	50
BLUE	1255	50
BROWN	1256	50
RED	1257	50
YELLOW	1258	50
GREEN	1259	50

ACCESSORIES			
Cross Connection 	Order No.	Section	Pcs.
	1925	2,5 / 2	100
	1926	2,5 / 3	100
	1927	2,5 / 4	75
	1928	2,5 / 10	30
	1929	2,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4440 / 4442 / 9540 / 7301		